

Model No: PLS-65N25AL03-04
 Product Line:


Rev 1
 Last Update: 2017-01-05 14:20:43

Product Description

PLS mid-range ,2.5 inch.4 ohm ,neodymium magnet, steel basket,AL cone
 NOTE THIS DRIVER IS NOT APPROVED AND/OR IS NOT IN MASS PRODUCTION YET.
 AS SUCH IT MAY BE SUBJECT TO CHANGE.
 SPEC IS ONLY FOR INFORMATION.
 PLEASE CHECK STATUS WITH THE ENGINEER




Mechanical Drawing

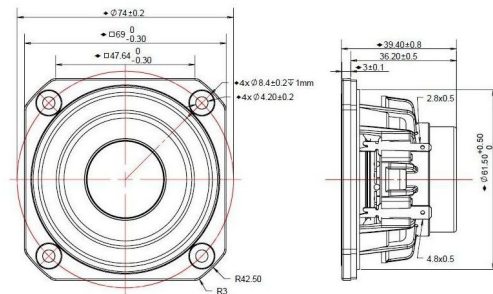

Specifications

DC Resistance	Revc	Ohms	3.97	5.0%	Energy Bandwidth Product	EBP	(1/Qes)*fs	147.93
Minimum Impedance	Zmin	Ohms	3.68	7.5%	Moving Mass	Mms	g	2.16
Voice Coil Inductance	Le	mH	0.03		Suspension Compliance	Cms	um/N	824.76
Resonant Frequency	Fs	Hz	119.38	15%	Effective Cone diameter	D	cm	5.2
Mechanical Q Factor	Qms		3.71		Effective Piston Area	Sd	cm ²	21.24
Electrical Q Factor	Qes		0.81		Effective Volume	Vas	L	0.52
Total Q Factor	Qts		0.66		Motor Force Factor	BL	Tm	2.82
Ratio Fs/Qts	F	Fs/Qts	180.06		Motor Efficiency Factor	β	(T*M ²)/Ohms	2
Half Space Sensitivity @2.83V	db@2.83V/1M	dB	87.07	+/- 1.0db	Voice coil former Material	VCfm		ASV
Half Space Sensitivity @1W/1M	db@1W/1M	dB	83.69	+/- 1.0db	Voice coil inner diameter	VCd	mm	25.73
Gap Height	Gh	mm	3		Rated Noise Power	P	W	25
Maximum Linear Excursion	Xmax	mm	1.65		Test Spectrum Bandwidth	100Hz-20KHz		
Ferrofluid Type	FF				Transducer Size	Inch	2.5	
Transducer Mass	Kg	0.143						

Frequency and Impedance Response

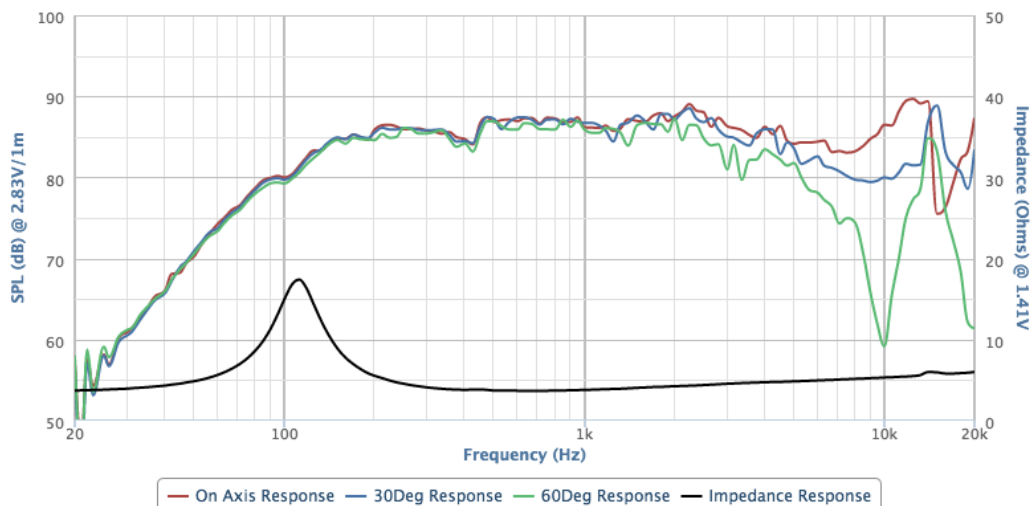

Highcharts.com