


MATERIALS AND FINISHES

N PLUG :
SEE SD-73276-067

CABLE : LMR240 OR EQUIVALENT

SHRINK TUBE : RAYCHEM ATUM OR EQUIVALENT

CAP VINYL

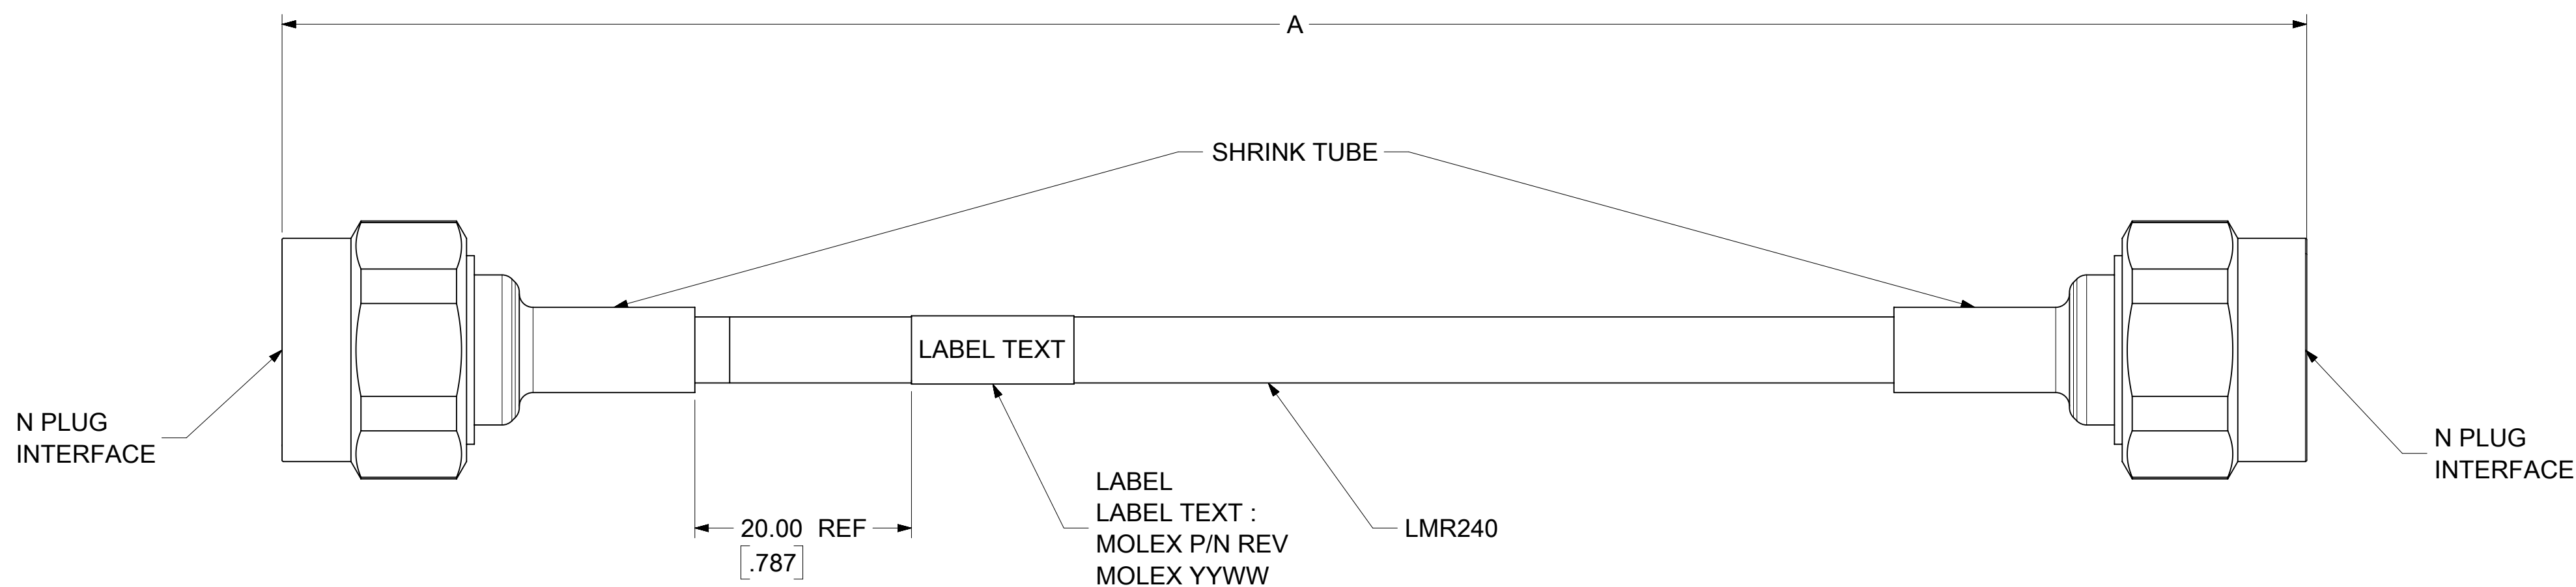


100% HI-POT AND CONTINUITY TESTED
TYPICAL RETURN LOSS : 16 dB AT 6GHz

RoHS COMPLIANT

73230-5402	36.00±.5	914.40±12.7
73230-5401	24.00±.5	609.60±12.7
73230-5400	12.00±.5	304.80±12.7
PART NO.	IN	MM
	A	

MIL-STD-348A. FIG. 304.1	INTERFACE
SPECIFICATION	DESCRIPTION

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
	DIMENSION UNITS		SCALE		CURRENT REV DESC:					molex						
	MM/INCH	11:5														
	GENERAL TOLERANCES (UNLESS SPECIFIED)															
ANGULAR TOL ± 2.0°																
DIVISIONAL SYMBOLS	$\frac{F}{A} = 0$	4 PLACES ±		EC NO: 676515					N PLUG STR TO N PLUG R/A LMR240 TO N PLUG R/A LMR240 CA-N/N, EWR14556							
	$\frac{F}{C} = 0$	3 PLACES ±		DRWN: MYLU07 2021/06/22												
	$\frac{F}{D} = 0$	2 PLACES ±		CHK'D: YHUANG11 2021/09/07												
	1 PLACE ±		APPR: LCHEN03 2021/09/07													
	0 PLACES ±		INITIAL REVISION:					PRODUCT CUSTOMER DRAWING								
			DRWN: MYLU07 2021/06/22													
			APPR: LCHEN03 2021/09/07													
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES		DOCUMENT NUMBER			DOC TYPE		DOC PART		REVISION
				C-SIZE		73230		732305400			PSD		000		A	
								MATERIAL NUMBER			CUSTOMER				SHEET NUMBER	
											GENERAL MARKET				1 OF 1	