
MICRO SWITCH
FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING
V3L-2163
CQX1407

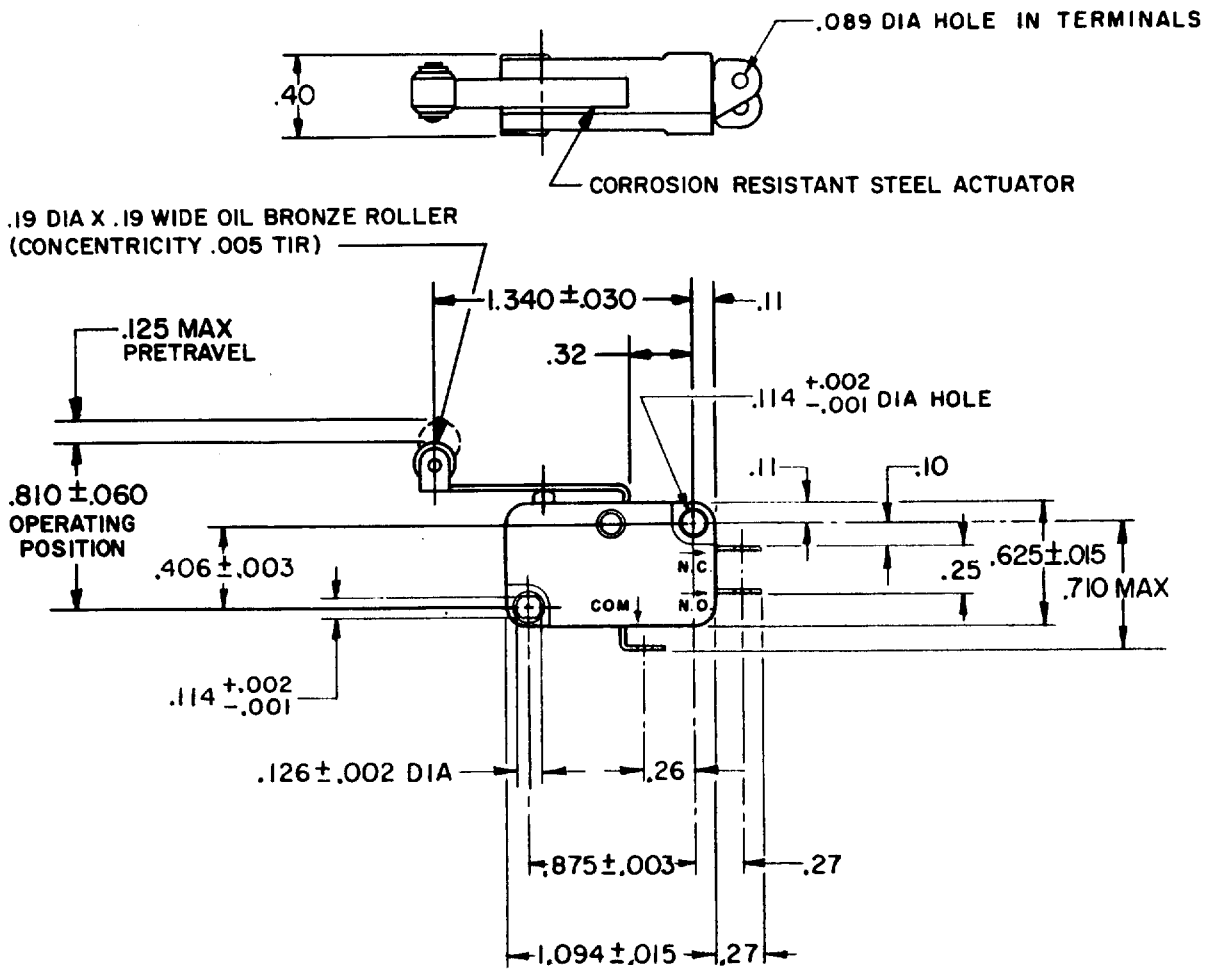

NOTE -
1 - TERMINALS ARE PLATED FOR SOLDERING

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ------- 31 GRAM MAX
RELEASE FORCE ------- 2 GRAM MIN
DIFFERENTIAL TRAVEL ------ .030 MAX
OVERTRAVEL ------ .085 MIN
RELEASE TRAVEL ------ .016 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SPDT

-L131- 10A-1/4HP-125 OR 250 VAC
1/2A-125 VDC; 1/4A-250 VDC
3A-125 VAC "L"

SCALE FULL
DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE
ONE PLACE (.0) ± .030
TWO PLACE (.00) ± .015
THREE PLACE (.000) ± .005
ANGLES ±

WEIGHT

V3L-2163
REPLACES PR-3319
RELEASE NO.
DRAWING NUMBER M
ISSUE 3

REVISIONS
A CO 58921 SMA 28 SEPT 86
B CO 76300 JDB 19 NOV 93

DRAWN R C 27 APR 73
CHECK LSD 27 APR 73
CHECK
CHECK

FO-52848