
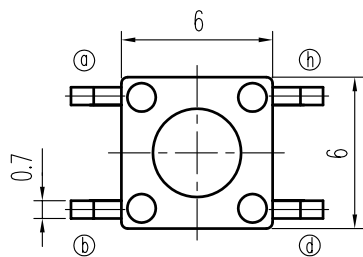
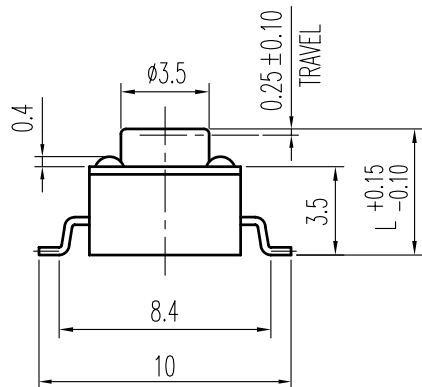



示意图 SCHEMATIC


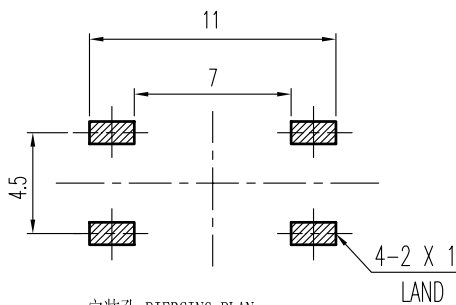


安装孔 PIERCING PLAN



FORCE (gf)		KNOB COLOUR	OPERATING LIFE WITH LOAD	SPRING PLATE
H	100 ± 30	WHITE	100,000 Cycles	1
0	130 ± 30	GREY		
1	160 ± 30	BLACK		
3	250 ± 50	IVORY/GREEN	50,000 Cycles	1
4	300 ± 50	BLACK	50,000 Cycles	2
	380 ± 50			
5	500 ± 100	GREY		

L	
A	4.3
B	5

③

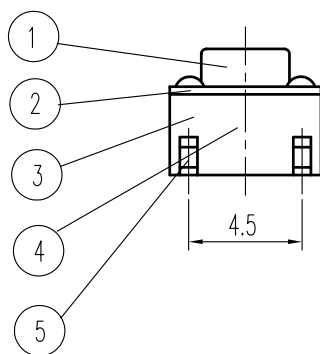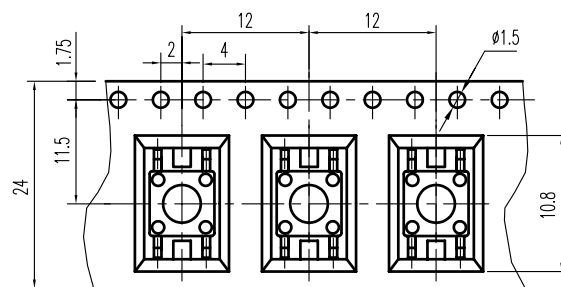

③ PACKAGE : 1000 SWITCHES PER REEL



规格 Specifications

额定负荷 Ratings	DC 12 V 50 m A
接触阻抗 Contact Resistance	100 mΩ Max.
绝缘阻抗 Insulation Resistance	DC 100 V 60 Sec. 100 MΩ Min.
抗电强度 Dielectric Voltage	AC 250 V (50~60HZ) 60 Sec.
操作力 Operating Force	见上表
负荷寿命 Operating Life With Load	见上表

5	端子 TERMINAL	C2680R	4	Ag PLATED	A04	PACKAGE : 700 SWITCHES PER REEL	王光云	2006-10-16
4	弹片 SPRING	C5210R	见上表	Ag CLAD		PACKAGE : 1000 SWITCHES PER REEL 见 ③		
3	胶壳 HOUSING	PA	1	BLACK	A03	取消共用柄长 见 ③	杨蝶	2006-10-13
2	盖片 COVER	POLY FILM	1	NATURAL	A02	增加寿命次数和弹片数量见上表 ③		
1	胶柄 KNOB	PA	1			修改见 ③	饶品旺	05-11-30
序NO.	零件 PART	材料 MATERIAL	数量 QTY	备注 REMARKS	标号 REV	内容 DESCRIPTION	签名 SIGN.	日期 DATE
DWG NO. ITEM2573								

TOLERANCES UNLESS OTHERWISE SPEC.		TITLE	TACT SWITCH		ITEM NO	RS-014R05__-SMA RT		
UNDER 1	± 0.10	DRAWN	王光云	2006-10-16	VERSION	A04	PAGE 1	OF 1
1 - 10	± 0.30	REVIEWED	张念明	2006-10-17	SCALE	—	UNIT	mm
OVER 10	± 0.50	APPROVED	刘瑞富	2006-10-17	PROJECTION			

COMAX ELECTRONICS (HUIZHOU) CO.,LTD.