

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/25/14	

6

5

4

3




2

1


APPROVED: _____

DATE: _____ TITLE: _____

D

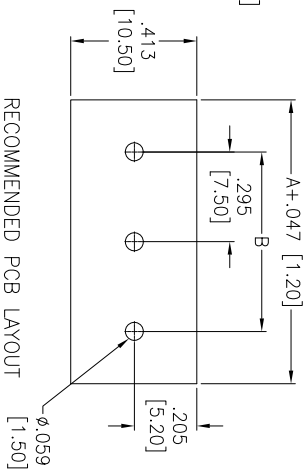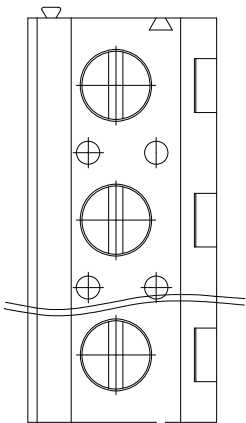

C

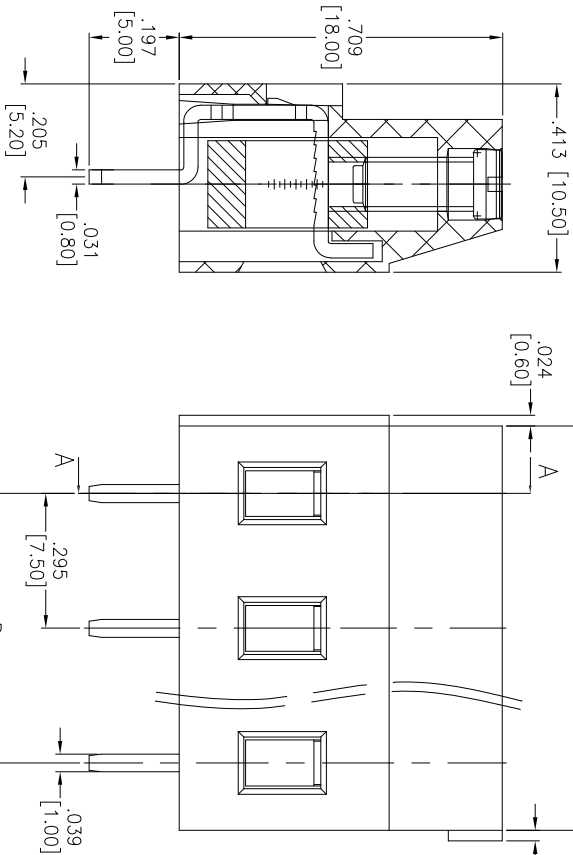

B

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0

Insulator color: Green

Screw: Steel, M3.0/Zinc plated

Cage: Brass, Nickel plated

Pin Header: Brass, Tin plated

Electrical:

Voltage rated: 300 VAC

Current rated: 16 Amps

Contact resistance: 20 mΩ

Insulation resistance: 500 MΩ @ 500 VDC

Withstanding voltage: 2000V AC/1 Min

Mechanical:

Solid wire: 26-12AWG 2.5mm²

Torque (Lb-in): 0.5Nm (4.5lb-in)

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.

Positions: 02 thru 24
A = .295 [7.50] x No. of Positions
B = .295 [7.50] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

.X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010

APPROVALS	DATE
-----------	------

DRAWN	AY	8/25/14
-------	----	---------

CHECKED	SC	8/25/14
---------	----	---------

APPROVED		
----------	--	--

ADAM TECH

909 Railway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE

EURO BLOCK, .295 [7.50] PITCH

SIZE	PART NO.	REV.
------	----------	------

X	EB147A-XX-M	-
---	-------------	---

REF:	S00067C	SCALE:	NIS	SHEET	1 OF 1
------	---------	--------	-----	-------	--------

A

A

B

C

D

6

5

4

3

2

1

