




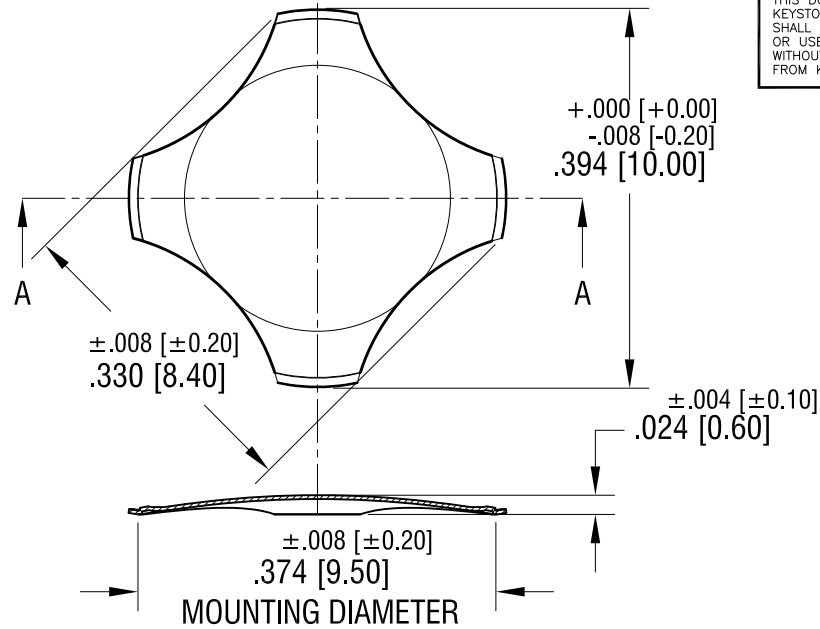

**ACTUAL SIZE**

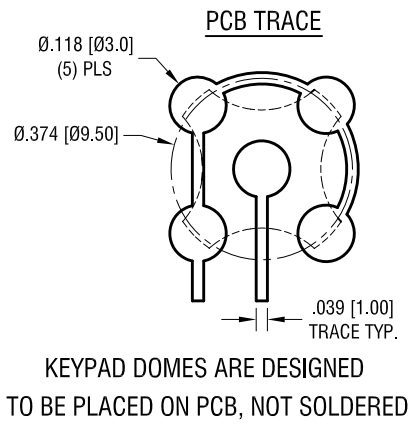

**SECTION A-A**

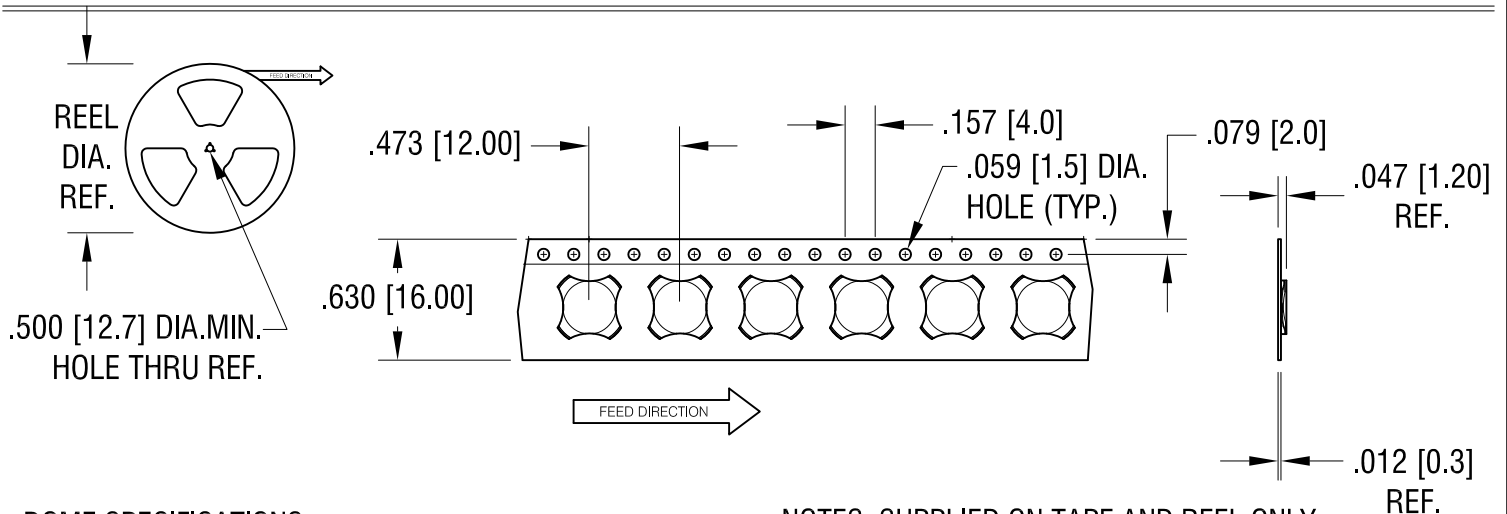

**DOMES SPECIFICATIONS:**

1. VOLTAGE/CURRENT MAXIMUM: 12mA@ 24 Volts DC
2. OPERATING TEMPERATURE: -40°C TO 105°C
3. STORAGE TEMPERATURE: -55°C TO 125°C
4. MAT'L: .004 [0.10] STAINLESS STEEL
5. FINISH: NICKEL PLATE
6. TRIP FORCE: 340g

**NOTES: SUPPLIED ON TAPE AND REEL ONLY**

**TAPE AND REEL SPECIFICATIONS:**

1. TAPE:  
MAT'L - ALL CONDUCTIVE POLYSTYRENE CARRIER  
ANSI/EIA-481 STANDARD
2. REEL:  
13.0 [330.2] DIA. 4000 PIECES PER REEL

|         |                                                                           |      |
|---------|---------------------------------------------------------------------------|------|
| 9.03.21 | DIMPLES REMOVED<br>CARRIER TAPE WAS 24mm WIDE<br>CHANGE AS PER ECN 21-102 | A    |
| DATE    | DESCRIPTION                                                               | REV. |

| KEYSTONE ELECTRONICS CORP.                                     |                 |        |         |
|----------------------------------------------------------------|-----------------|--------|---------|
| www.keyelco.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500 |                 |        |         |
| PART NAME                                                      |                 |        |         |
| COMPACT 4 LEG DOME                                             |                 |        |         |
| MATERIAL                                                       |                 |        |         |
| AS NOTED                                                       |                 |        |         |
| FINISH                                                         |                 | DRN BY | DATE    |
| AS NOTED                                                       |                 | NT     | 2.15.17 |
|                                                                |                 | APP'D  | SCALE   |
|                                                                |                 | RH     | 5X, 1X  |
| TOLERANCES                                                     | INCH [MM]       | CODE   | DWG NO. |
| DECIMAL                                                        | ± .005 [± 0.13] | C      | 5155TR  |
| ANGULAR                                                        | ± 1°            |        |         |
| UNLESS OTHERWISE SPECIFIED                                     |                 |        |         |