

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/19/05	
A		REDRAWN	4/16/10	
B		ADDED DIM.	12/1/15	AY/YC
C		UPDATE DRAWING	12/24/20	OW/LX

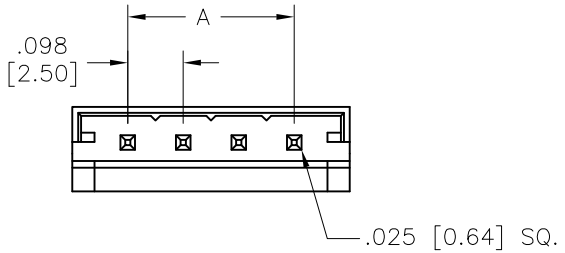

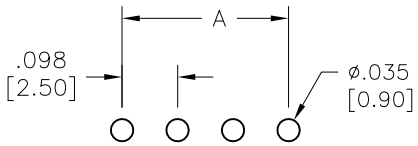

RECOMMENDED PCB LAYOUT

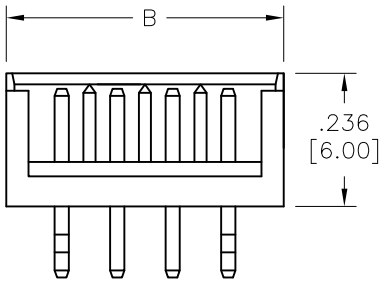

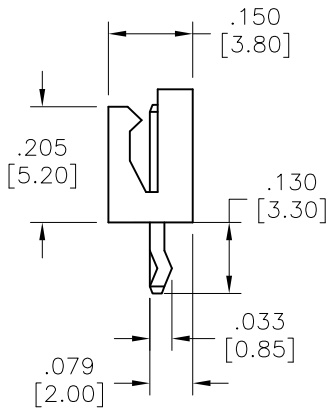

SPECIFICATIONS:

Material:
Insulator: Nylon, rated UL 94V-0
Insulator color: Nature
Contacts: Brass

Plating:
Tin over Copper underplate overall

Electrical:
Voltage rating: 250V AC, DC
Current rating: 3A AC, DC
Insulation resistance: 1000 Mohms min
Dielectric withstanding voltage: 800 VAC for 1 minute

Temperature Rating:
-25°C to +85°C

Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

Positions: 02 thru 12
A= .098 [2.50] x No. of Space
B= .098 [2.50] x No. of Space + .197 [5.00]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	9/19/05
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: 2.5MM SHROUDED HEADER, SINGLE ROW, TIN PLATED

SIZE	PART NO.	REV.
X	25SH-C-XX-TS	C

REF: S00016T | SCALE: NTS | SHEET 1 OF 1