


PART NO.			"L"
#4-40 THREAD	#6-32 THREAD	#8-32 THREAD	
HTS4-4-48	HTS6-4-48	---	1/4 (6.4)
HTS4-5-48	---	---	5/16 (7.9)
HTS4-6-48	HTS6-6-48	---	3/8 (9.5)
HTS4-7-48	HTS6-7-48	---	7/16 (11.1)
HTS4-8-48	HTS6-8-48	---	1/2 (12.7)
---	HTS6-9-48	---	9/16 (14.3)
HTS4-10-48	HTS6-10-48	HTS8-10-48	5/8 (15.9)
---	HTS6-16-48	---	1.00 (25.4)

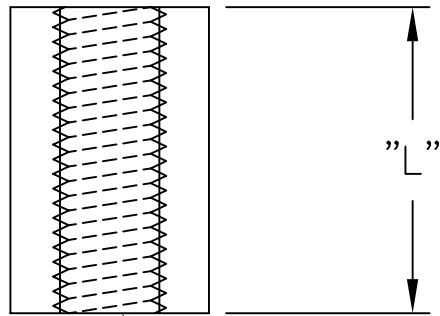

THREAD  
(SEE CHART)

NOTES:

- MATERIAL: NYLON 6/6 (RMS-48).  
FLAME RETARDANT NYLON, UL94-V0 (RMS-103).  
AVAILABLE BY SPECIAL ORDER ONLY.  
TO ORDER, REPLACE "-48" WITH "-103"
- COLOR: NATURAL

G	SEE CO 200041 FOR CHANGES	SK 09.28.07	TITLE: HEX THREADED STANDOFFS					DWG IN IN (MM)	
F	SEE ECN #1359 FOR CHANGES	SK 08.28.07							
E	SEE ECN #892 FOR CHANGES	SM 12.14.04	TOLERANCES	FILE # HTS	DWN: J.B.	APP:	PART #	PRINT	
D	SEE ECN #547 FOR CHANGES	SM 12.20.02	UNLESS NOTED	MAT'L: SEE NOTES	DT: 01-20-97	DT:			TYPE
C	SEE ECN #526 FOR CHANGES	SM 11.21.02	.XX=±.010	RE: RICHCO, INC.	RICHCO INC.		SEE CHART	CA	
B	CHANGED FILE NUMBER	SM 06.14.02	.XXX=±.005	PO BOX 804238, CHICAGO, 60680		(773) 539-4060			
A	FLAME RETARDANT MAT'L RMS-103 ADDED	JL 7.5.00	FRAC=±1/64						
REV	DESCRIPTION	ENGR DATE	ANG=±1'						