


APPROVED: _____

DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/11/20	
A		UPDATE SPEC.	8/10/21	WX/RC

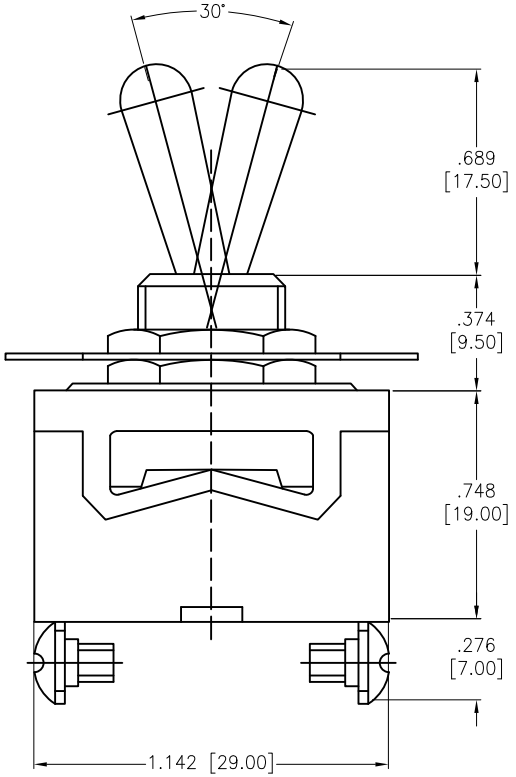

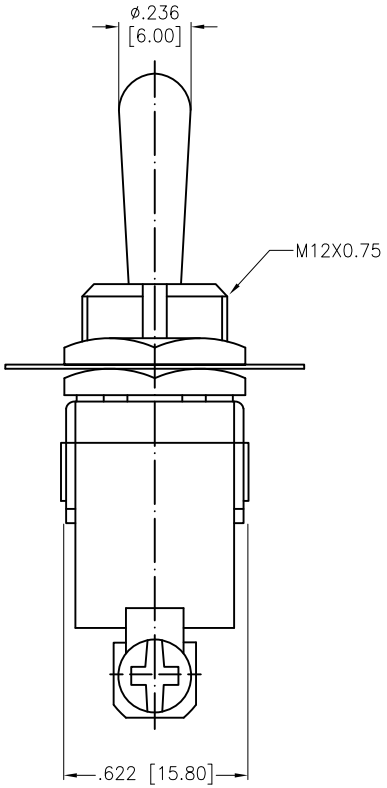



RECOMMENDED
PANEL CUT-OUT



CIRCUIT DIAGRAM
(SPST)

SW-T1-1X-D-K1
- A=ON-OFF
- C=OFF-(ON)

SPECIFICATIONS:
Material:
Body: Bakelite, Color: Black
Lever: Brass, Nickel plated
Terminal: Brass, Silver plated
Electrical:
Rating: 10A @ 250V AC
15A @ 125V AC
Contact resistance: 50 mΩ max
Insulation resistance: 1000 MΩ min (500VDC)
Dielectric withstanding voltage: 1500V AC for 1 minute
Electrical Life: 10,000 cycles
Temperature Rating:
Operating temperature: -25°C to +85°C
Environmental:
Lead free, RoHS compliant RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	OW	11/11/20
CHECKED	AC	11/11/20
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: SWITCH, TOGGLE MEDIUM, SPST, ON-OFF, OFF-(ON), SCREW LUG

SIZE	PART NO.	REV.
X	SW-T1-1X-D-K1	A

REF: S00204C | SCALE: NTS | SHEET 1 OF 1