

6


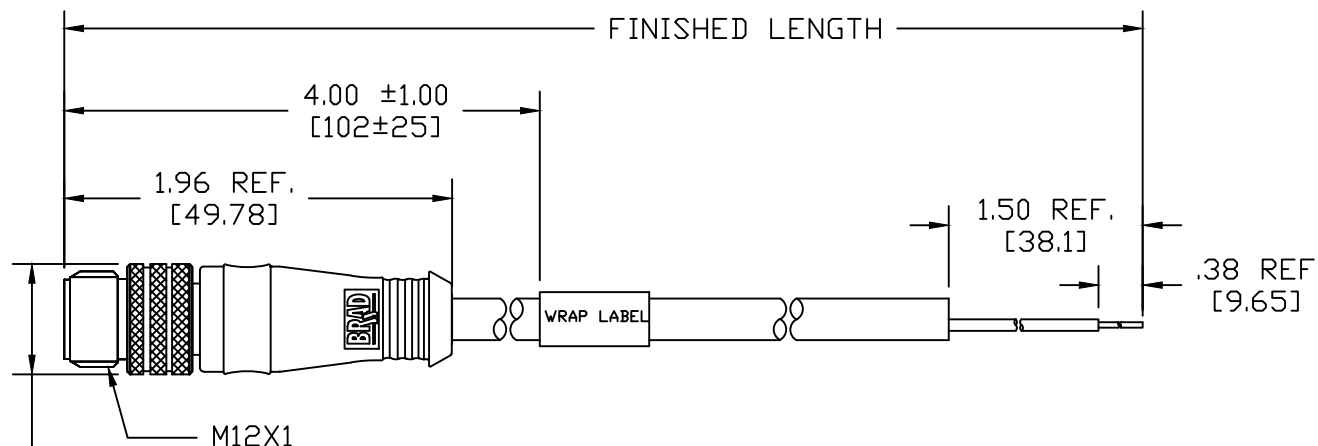
5

4

3

2

1

MALE INSERT
FRONT VIEW1 BROWN
2 WHITE
3 BLUE
4 BLACK.57 REF.
[14.48]

MECHANICAL

CONTACT : GOLD/NICKEL OVER COPPER ALLOY

INSERT : BLACK PUR

COUPLING NUT: TEFLON COAT OVER NICKEL PLATED BRASS

MOLDED BODY: GRAY PVC

CABLE: 20 AWG 4 CONDUCTORS LIGHT GRAY PVC JACKET

CABLE MARKING: KRL-45/CM KURAMO E200151-K (UL) CM

OR CL3 4C20AWG 75C AWM 2464 80C 300V VW-1...C(UL)

CM 4C20AWG 75C AWM I A/B 80C 300V FT1

1-BROWN 2-WHITE 3-BLUE 4-BLACK ** LF

WRAP LABEL: MYLAR, WHITE WITH BLACK LETTERS

ELECTRICAL

VOLTAGE RATING: 250V AC/DC

AMPERAGE: 4A

ENVIRONMENTAL

PROTECTION: IP67 PER IEC 60529

IP68 PER SPEC PS-120001-001

OPERATION TEMP: 0°C~75°C

804006J11M020

Wire type
20/4C AWG light
Gray PVCcable length
M020----2 Meter
M100----10 Meter

E

D

C

B

A

E

D

C

B

A

RELEASE EC NO: WEU2012-0002 DRWN: TWOLDEGE 2011/07/19 CHKD: VOU APPR: JFMURPHY 2012/04/17	DESCRIPTION	QUALITY SYMBOLS =0 =0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION		
					DRAWN BY DATE	TITLE MICRO CHANGE ASSEMBLY 4-POLE MALE STRAIGHT 20/4 AWG LIGHT GRAY PVC					
			4 PLACES	±---	±---					CHECKED BY DATE	
			3 PLACES	±---	±.005					VOU	---
			2 PLACES	±0.13	±.010	APPROVED BY DATE		MOLEX MOLEX INCORPORATED			
			1 PLACE	±.25	±.020	JFMURPHY	2012/04/17				
		ANGULAR ±1/2°		MATERIAL NO.		DOCUMENT NO.		SHEET NO.			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
A		REV					SD-120001-007		1 OF 1		