

RoHS Compliant

Dust Proof Tactile

Specifications

Electrical Ratings	50mA @ 48VDC
Electrical Life	100,000 cycles typical 1,000,000 cycles typical (stainless steel dome only)
Contact Resistance	<50mΩ initial
Actuation Force	160 ± 50gF 200 ± 50gF 260 ± 50gF 520 ± 50gF

Actuator Travel	.45 ± .1mm
Dielectric Strength	250Vrms min
Insulation Resistance	>100MΩ min
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 90°C


Materials

Actuator	Polybutylene Terephthalate (PBT)
Housing	Polybutylene Terephthalate (PBT)
Cover	Stainless Steel
Contacts	Stainless Steel, Silver Plated
Terminals	Brass, Silver Plated

Ordering Information

1. Series	ST	5.0	F160	Q
ST				
2. Actuator Length 4.3 = 4.3mm 5.0 = 5.0mm 10.0 = 10.0mm				
3. Contact Options L = Stainless Steel				
4. Actuation Force F160 = F160gF F200 = F200gF F260 = F260gF F520 = F520gF				
5. Contact Material Q = Silver				

Dimensions

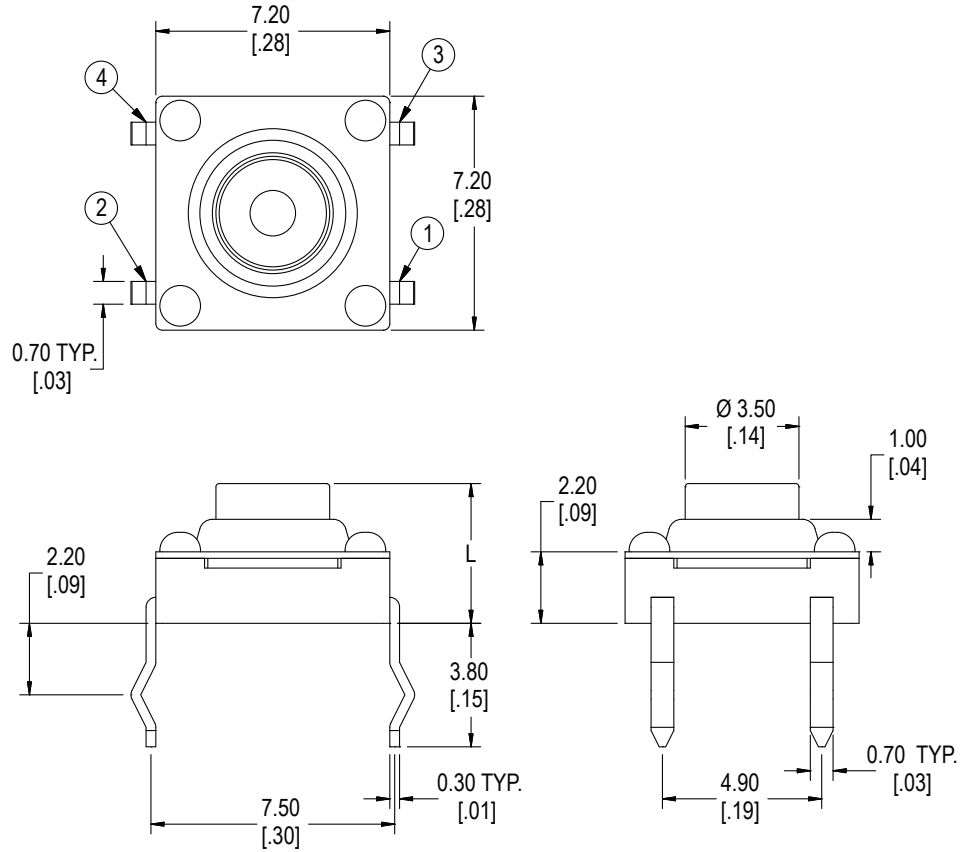

Schematic & PC Layout

