

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/26/18	


APPROVED: _____

DATE: _____ TITLE: _____

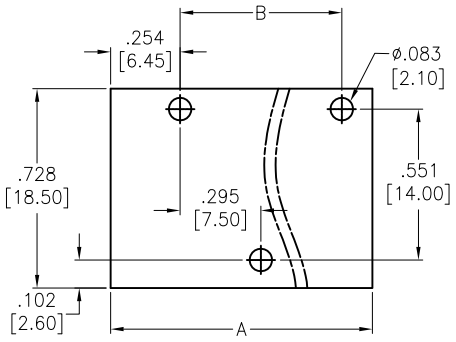

RECOMMENDED PCB LAYOUT

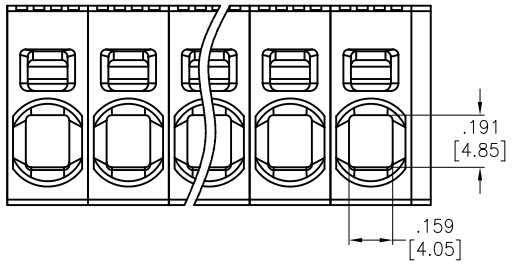

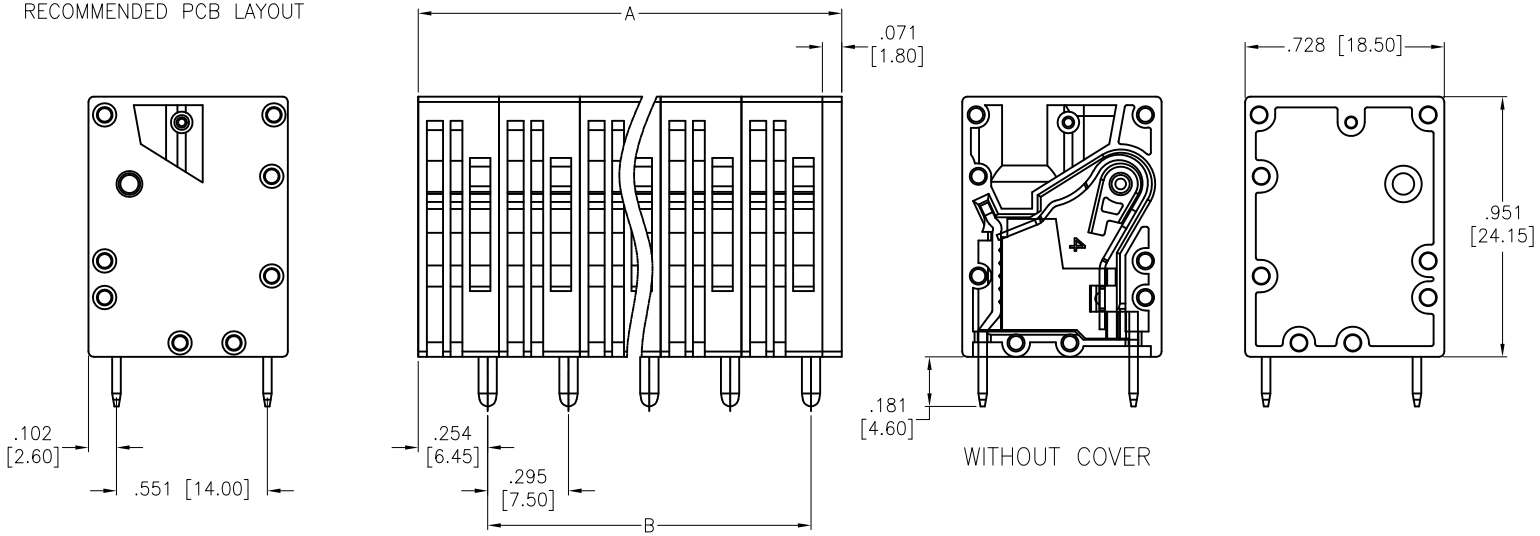

WITHOUT COVER

01P 02P 03P ..... xxP

Poles: 01 thru XXP
A = .295 [7.50] X No. of Positions +.071 [1.80]
B = .295 [7.50] X No. of Spaces

SPECIFICATIONS:
Material:
Insulator: PA, rated UL 94V-0
Insulator color: Green
Contact: Copper Alloy, Tin plated
Electrical:
Voltage rating: 600 V
Current rating: 40 A
Dielectric withstanding voltage: 2,200 VAC for 1 minute
Mechanical:
Strip length: 15~16mm
Wire Range: 24~8 AWG
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	11/26/18
CHECKED	AC	11/26/18
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
SPRING CLAMP EURO BLOCK, .295 [7.50] PITCH

SIZE	PART NO.	REV.
X	EB167A-XX-M-180	-

REF:	SCALE:	SHEET
S00067C	NTS	1 OF 1