

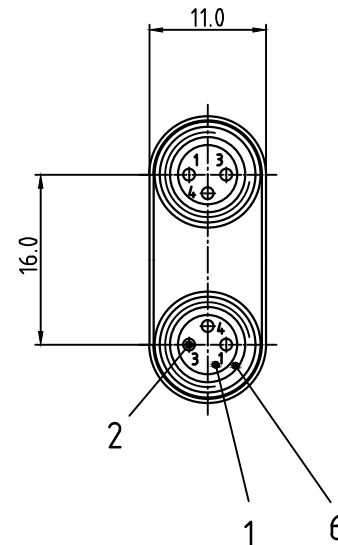
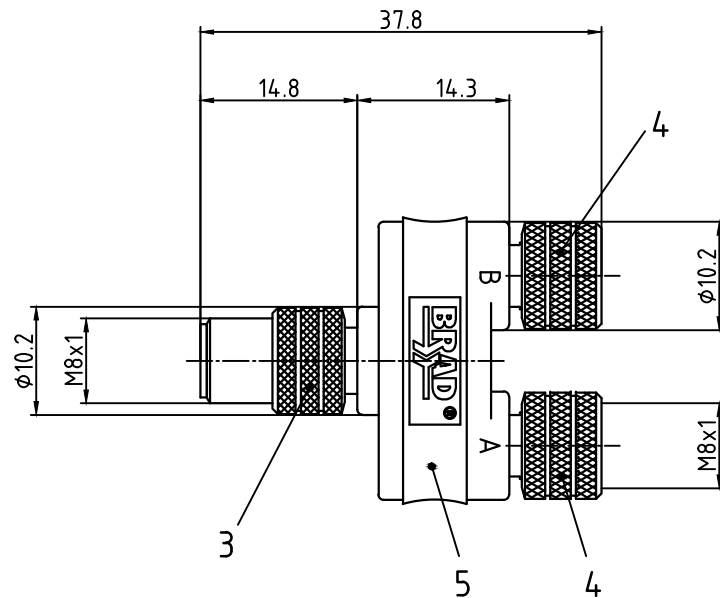




CONNECTOR SPECIFICATION: Steckverbinder-Eigenschaften:	
VOLTAGE RATING Bemessungsspannung	60V AC / 75V DC
AMPERAGE RATING Betriebsstrom	max. 3 AMPS
PROTECTION Schutzart	IP67
OPERATING TEMPERATURE Temperaturbereich	-25°C TO +90°C

POS. Pos.	COMPONENT Einzelteil	MATERIAL Material	FINISH Oberfläche
1	INSERT Kontaktträger	PUR / BLACK PUR / schwarz	---
2	CONTACT SOCKET Kontakt	COPPER ALLOY Kupferlegierung	GOLD-PLATED vergoldet
3	COUPLING NUT MALE Schraubverschluß Stecker	BRASS Messing	NICKEL-PLATED vernickelt
4	COUPLING NUT FEMALE Schraubverschluß Buchse	BRASS Messing	NICKEL-PLATED vernickelt
5	OVERMOULD Umspritzung	PUR / BLACK PUR / schwarz	---
6	O-RING (FEMALE) O-Ring (Buchse)	FPM / RED FPM / rot	---

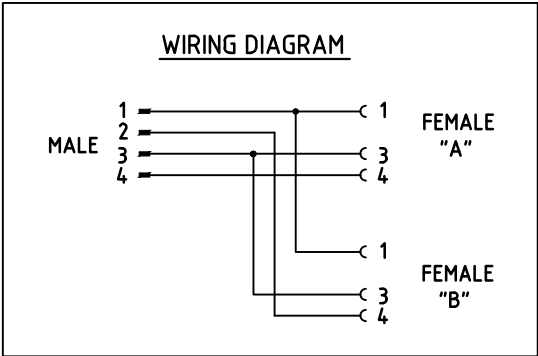

(...) INFORMATION DIMENSION
(...) Informationsmaß

ENG.-NO.: 0808-04LMF-00000

DESCRIPTION		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE		DESIGN UNITS		THIRD ANGLE PROJECTION	
EC NO: IPG2013-1030		DRWN: BBRAUCH 2013/01/15		CHKD: REISSNER		APPR: REISSNER 2013/01/16		mm ONLY		2:1		METRIC	
REV		DESCRIPTION		mm		INCH		DRAWN BY		DATE		SPL YS M8 4P AC MA	
A		4 PLACES ±---		±---		±---		BBRAUCH		2013/01/15		FE FE	
		3 PLACES ±---		±---		±---		CHECKED BY		DATE		----	
		2 PLACES ±0.05		±---		±---		REISSNER		2013/01/16		molex	
		1 PLACE ±0.3		±---		±---		APPROVED BY		DATE		DOCUMENT NO.	
		0 PLACE ±0.5		±---		±---		REISSNER		2013/01/16		1200890033	
		ANGULAR ± 1°		±---		±---		MATERIAL NO.		SD-120089-015		SHEET NO.	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE		A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		1 OF 1			