# Diode

Rapid Switching Emitter Controlled Diode

# IDP08E65D2


Emitter Controlled Diode

Data sheet

Industrial Power Control

# Rapid Switching Emitter Controlled Diode

**Features:**

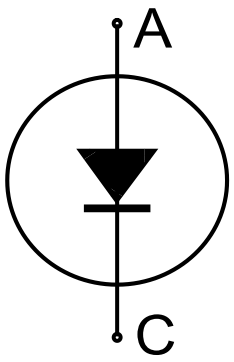


- Qualified according to JEDEC for target applications
- 650 V Emitter Controlled technology
- Fast recovery
- Soft switching
- Low reverse recovery charge
- Low forward voltage and stable over temperature
- 175 °C junction operating temperature
- Easy paralleling
- Pb-free lead plating; RoHS compliant

**Applications:**

- Boost diode in CCM PFC




**Key Performance and Package Parameters**

| Type | $V_{rrm}$ | $I_f$ | $V_f$, $T_{vj}$=25°C | $T_{vjmax}$ | Marking | Package |
|---|---|---|---|---|---|---|
| IDP08E65D2 | 650V | 8A | 1.6V | 175°C | E08ED2 | PG-TO220-2-1 |

**Table of Contents**

Description . . . . . 2
Table of Contents . . . . . 3
Maximum Ratings . . . . . 4
Thermal Resistance . . . . . 4
Electrical Characteristics . . . . . 4
Electrical Characteristics Diagrams . . . . . 6
Package Drawing . . . . . 8
Testing Conditions . . . . . 9
Revision History . . . . . 10
Disclaimer . . . . . 10

## Maximum Ratings

**For optimum lifetime and reliability, Infineon recommends operating conditions that do not exceed 80% of the maximum ratings stated in this datasheet.**

| Parameter | Symbol | Value | Unit |
|---|---|---|---|
| Repetitive peak reverse voltage | $V_{RRM}$ | 650 | V |
| Diode forward current, limited by $T_{vjmax}$<br>$T_C$ = 25°C<br>$T_C$ = 100°C | $I_F$ | <br>16.0<br>8.0 | A |
| Diode pulsed current, $t_p$ limited by $T_{vjmax}$ | $I_{Fpuls}$ | 24.0 | A |
| Diode surge non repetitive forward current<br>$T_C$ = 25°C, $t_p$ = 8.3ms, sine halfwave | $I_{FSM}$ | <br>60.0 | A |
| Power dissipation $T_C$ = 25°C | $P_{tot}$ | 56.0 | W |
| Operating junction temperature | $T_{vj}$ | -40...+175 | °C |
| Storage temperature | $T_{stg}$ | -55...+150 | °C |
| Soldering temperature,<br>wave soldering 1.6 mm (0.063 in.) from case for 10s | | <br>260 | °C |
| Mounting torque, M3 screw<br>Maximum of mounting processes: 3 | $M$ | 0.6 | Nm |

## Thermal Resistance

| Parameter | Symbol | Conditions | Max. Value | Unit |
|---|---|---|---|---|
| **Characteristic** | | | | |
| Diode thermal resistance,[1)]<br>junction - case | $R_{th(j-c)}$ | | 2.69 | K/W |
| Thermal resistance<br>junction - ambient | $R_{th(j-a)}$ | | 62 | K/W |

## Electrical Characteristic, at $T_{vj}$ = 25°C, unless otherwise specified

| Parameter | Symbol | Conditions | Value | | | Unit |
|---|---|---|---|---|---|---|
| | | | min. | typ. | max. | |
| **Static Characteristic** | | | | | | |
| Diode forward voltage | $V_F$ | $I_F$ = 8.0A<br>$T_{vj}$ = 25°C<br>$T_{vj}$ = 175°C | <br>-<br>- | <br>1.60<br>1.65 | <br>2.20<br>- | V |
| Reverse leakage current | $I_R$ | $V_R$ = 650V<br>$T_{vj}$ = 25°C<br>$T_{vj}$ = 175°C | <br>-<br>- | <br>-<br>- | <br>40.0<br>2000.0 | µA |

## Electrical Characteristic, at $T_{vj}$ = 25°C, unless otherwise specified

| Parameter | Symbol | Conditions | Value | | | Unit |
|---|---|---|---|---|---|---|
| | | | min. | typ. | max. | |
| **Dynamic Characteristic** | | | | | | |
| Internal emitter inductance<br>measured 5mm (0.197 in.) from case | $L_E$ | | - | 7.0 | - | nH |

[1)] Please be aware that in non standard load conditions, due to high Rth(j-c), Tvj close to Tvjmax can be reached.

**Switching Characteristic, Inductive Load**

| Parameter | Symbol | Conditions | Value | | | Unit |
|---|---|---|---|---|---|---|
| | | | min. | typ. | max. | |
| **Diode Characteristic, at $T_{vj}$ = 25°C** | | | | | | |
| Diode reverse recovery time | $t_{rr}$ | $T_{vj}$ = 25°C, $V_R$ = 400V, $I_F$ = 8.0A, $di_F/dt$ = 1000A/µs, $L\sigma$ = 35nH, $C\sigma$ = 32pF, switch IPW60R045CP | - | 23 | - | ns |
| Diode reverse recovery charge | $Q_{rr}$ | | - | 0.11 | - | µC |
| Diode peak reverse recovery current | $I_{rrm}$ | | - | 7.4 | - | A |
| Diode peak rate of fall of reverse recovery current during $t_b$ | $di_{rr}/dt$ | | - | -3300 | - | A/µs |
| Diode reverse recovery time | $t_{rr}$ | $T_{vj}$ = 25°C, $V_R$ = 400V, $I_F$ = 8.0A, $di_F/dt$ = 200A/µs, $L\sigma$ = 35nH, $C\sigma$ = 32pF, switch IPW60R045CP | - | 40 | - | ns |
| Diode reverse recovery charge | $Q_{rr}$ | | - | 0.08 | - | µC |
| Diode peak reverse recovery current | $I_{rrm}$ | | - | 2.5 | - | A |
| Diode peak rate of fall of reverse recovery current during $t_b$ | $di_{rr}/dt$ | | - | -1300 | - | A/µs |

**Switching Characteristic, Inductive Load**

| Parameter | Symbol | Conditions | Value | | | Unit |
|---|---|---|---|---|---|---|
| | | | min. | typ. | max. | |
| **Diode Characteristic, at $T_{vj}$ = 175°C/125°C** | | | | | | |
| Diode reverse recovery time | $t_{rr}$ | $T_{vj}$ = 175°C, $V_R$ = 400V, $I_F$ = 8.0A, $di_F/dt$ = 1000A/µs, $L\sigma$ = 35nH, $C\sigma$ = 32pF, switch IPW60R045CP | - | 30 | - | ns |
| Diode reverse recovery charge | $Q_{rr}$ | | - | 0.20 | - | µC |
| Diode peak reverse recovery current | $I_{rrm}$ | | - | 10.0 | - | A |
| Diode peak rate of fall of reverse recovery current during $t_b$ | $di_{rr}/dt$ | | - | -2200 | - | A/µs |
| Diode reverse recovery time | $t_{rr}$ | $T_{vj}$ = 125°C, $V_R$ = 400V, $I_F$ = 8.0A, $di_F/dt$ = 200A/µs, $L\sigma$ = 35nH, $C\sigma$ = 32pF, switch IPW60R045CP | - | 58 | - | ns |
| Diode reverse recovery charge | $Q_{rr}$ | | - | 0.13 | - | µC |
| Diode peak reverse recovery current | $I_{rrm}$ | | - | 3.8 | - | A |
| Diode peak rate of fall of reverse recovery current during $t_b$ | $di_{rr}/dt$ | | - | -2200 | - | A/µs |

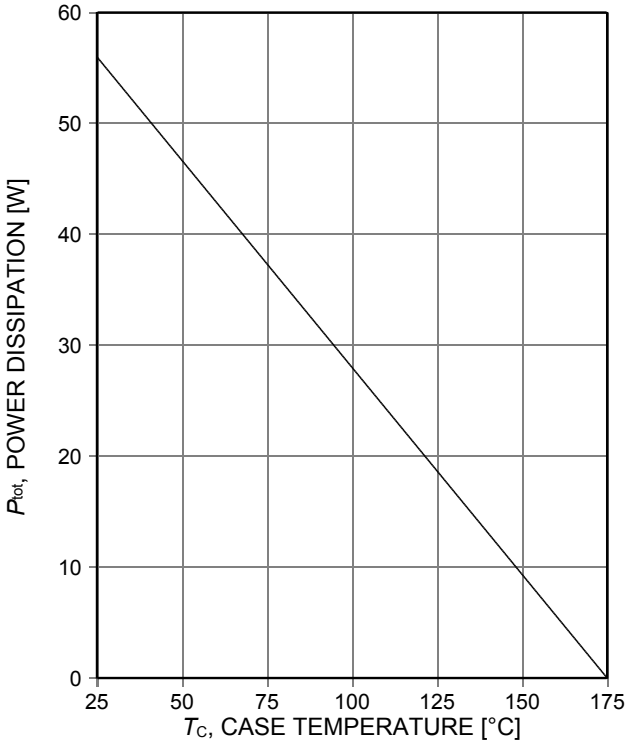



Figure 1. **Power dissipation as a function of case temperature**
($T_{vj}$≤175°C)

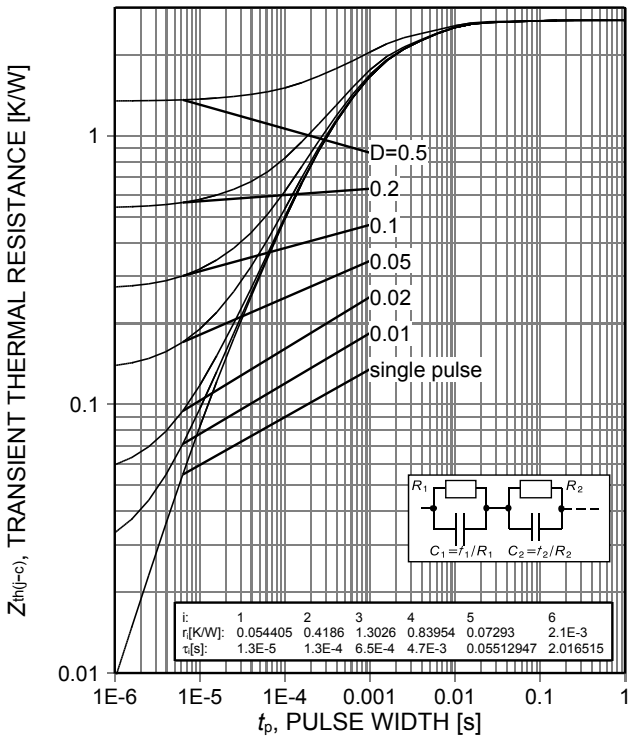



Figure 2. **Diode transient thermal impedance as a function of pulse width**
($D$=$t_p$/T)

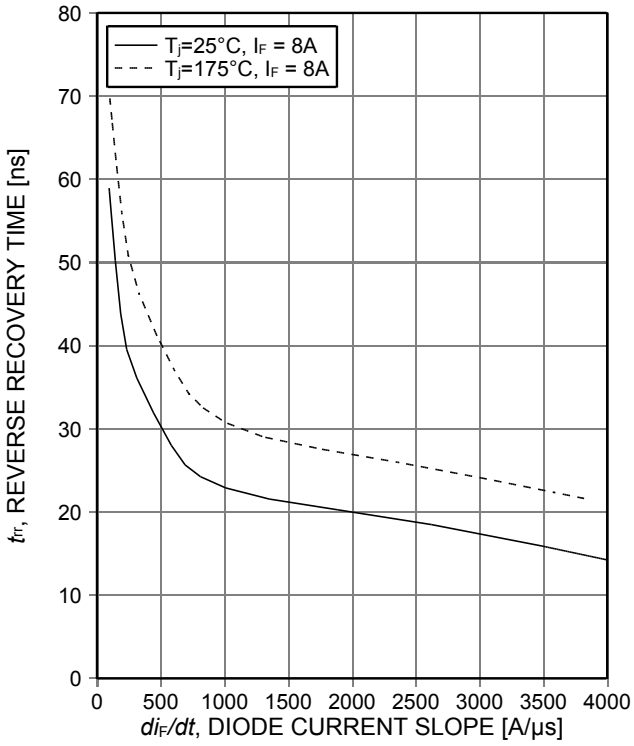



Figure 3. **Typical reverse recovery time as a function of diode current slope**
($V_R$=400V)

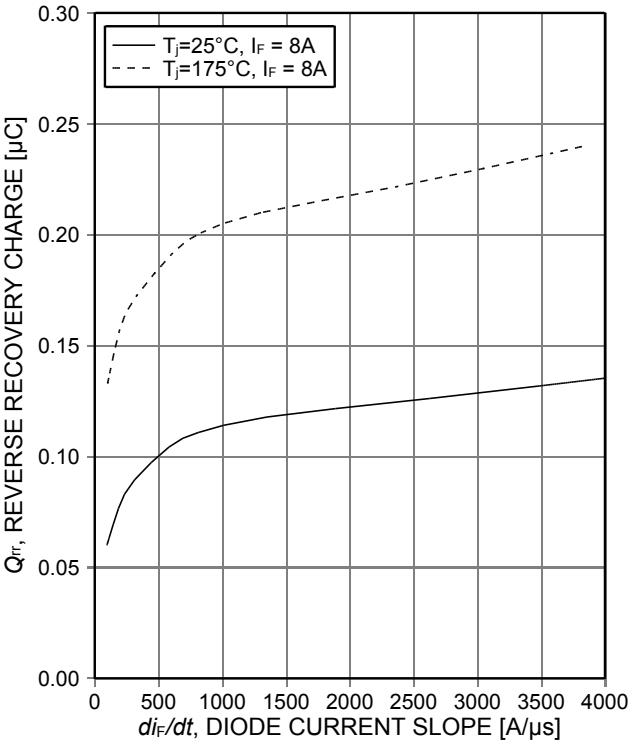



Figure 4. **Typical reverse recovery charge as a function of diode current slope**
($V_R$=400V)

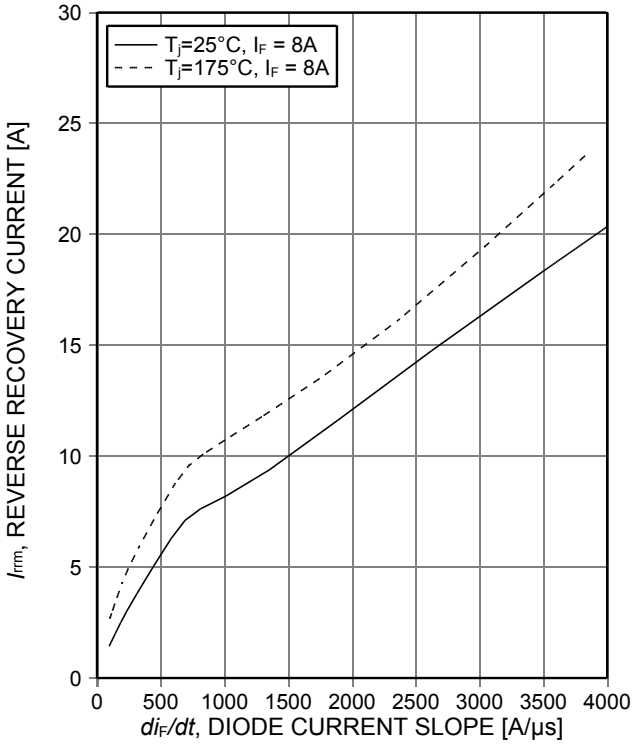



Figure 5. **Typical peak reverse recovery current as a function of diode current slope**
($V_R$=400V)

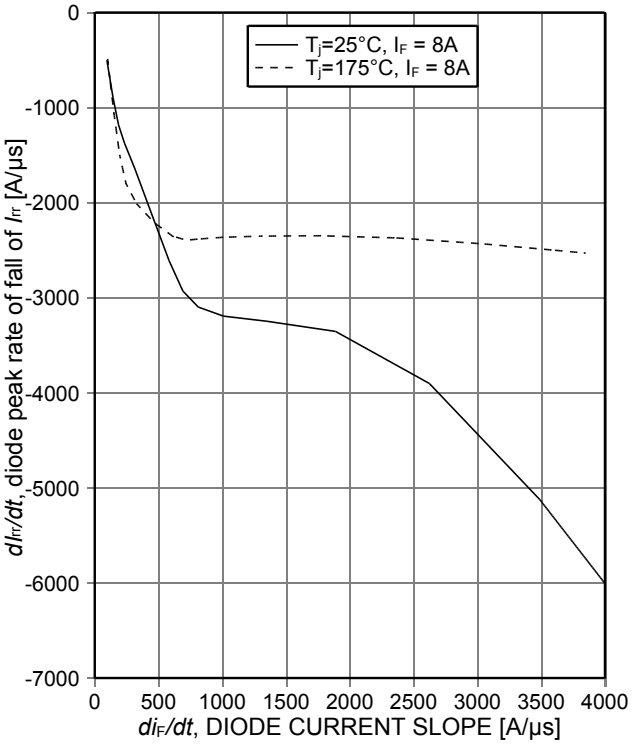



Figure 6. **Typical diode peak rate of fall of reverse recovery current as a function of diode current slope**
($V_R$=400V)

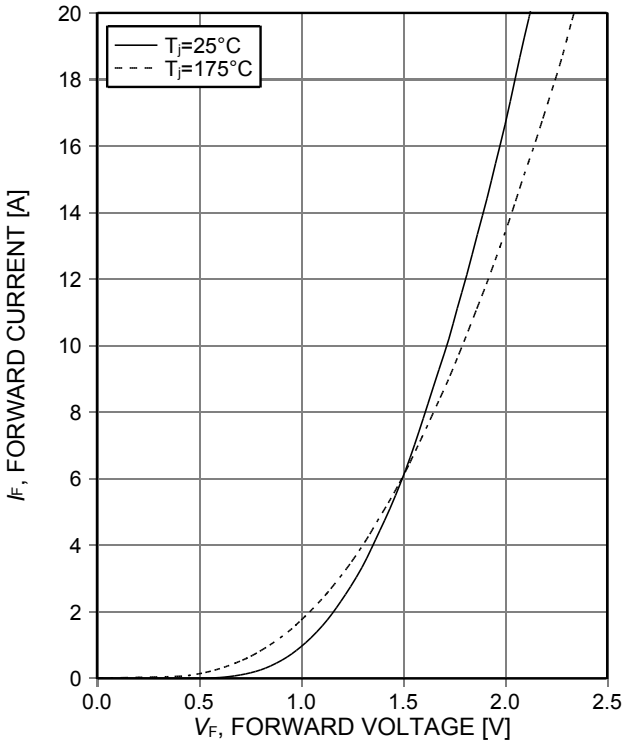



Figure 7. **Typical diode forward current as a function of forward voltage**


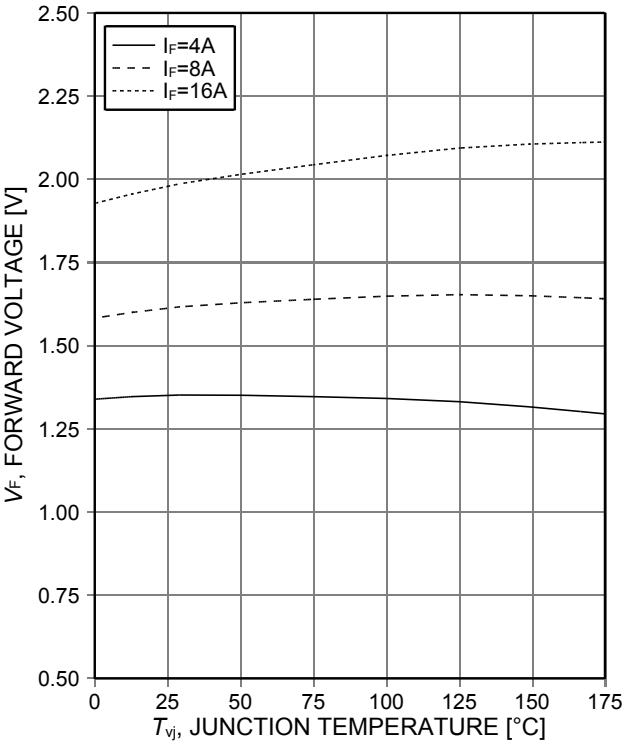



Figure 8. **Typical diode forward voltage as a function of junction temperature**

# PG-TO220-2-1

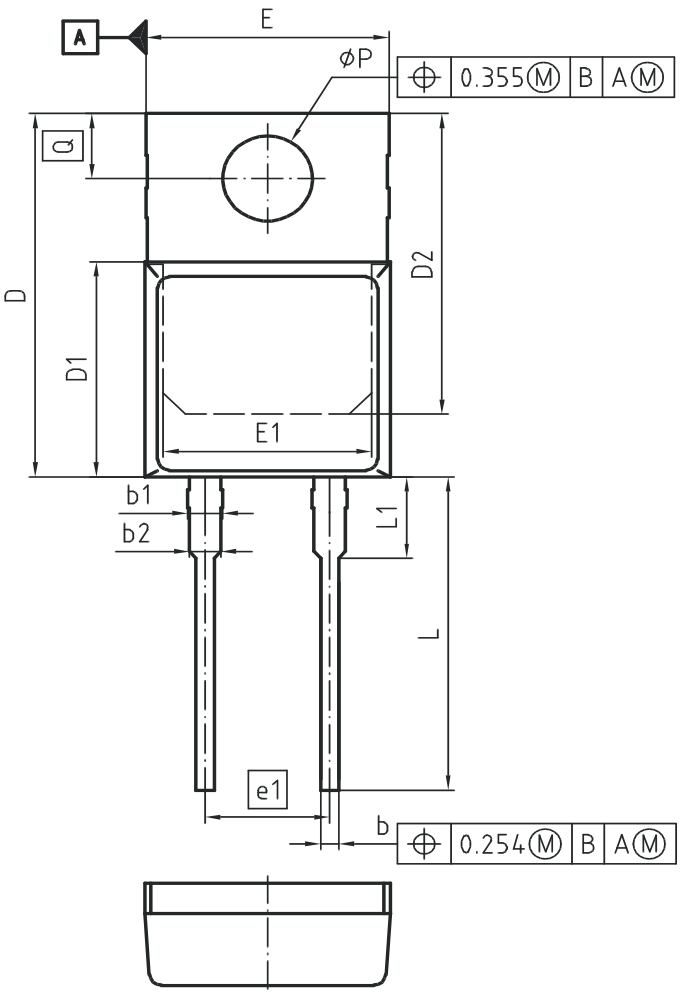


| DIM | MILLIMETERS | | INCHES | |
|---|---|---|---|---|
| | MIN | MAX | MIN | MAX |
| A | 4.30 | 4.50 | 0.169 | 0.177 |
| A1 | 1.17 | 1.37 | 0.046 | 0.054 |
| A2 | 2.30 | 2.50 | 0.091 | 0.098 |
| b | 0.65 | 0.85 | 0.026 | 0.033 |
| b1 | 1.19 | 1.69 | 0.047 | 0.066 |
| b2 | 1.19 | 1.39 | 0.047 | 0.055 |
| c | 0.40 | 0.60 | 0.016 | 0.024 |
| D | 15.35 | 15.95 | 0.604 | 0.628 |
| D1 | 9.05 | 9.45 | 0.356 | 0.372 |
| D2 | 12.30 | 13.05 | 0.484 | 0.514 |
| E | 9.80 | 10.20 | 0.386 | 0.402 |
| E1 | 7.25 | 8.60 | 0.285 | 0.339 |
| e1 | 5.08 | | 0.200 | |
| N | 2 | | 2 | |
| H1 | 5.90 | 6.90 | 0.232 | 0.272 |
| L | 13.00 | 14.00 | 0.512 | 0.551 |
| L1 | 3.30 | 3.70 | 0.130 | 0.146 |
| øP | 3.55 | 3.70 | 0.140 | 0.146 |
| Q | 2.60 | 3.00 | 0.102 | 0.118 |

DOCUMENT NO.
Z8B00150560

SCALE 0 2.5 0 2.5 5mm

EUROPEAN PROJECTION

ISSUE DATE
28-10-2008

REVISION
01

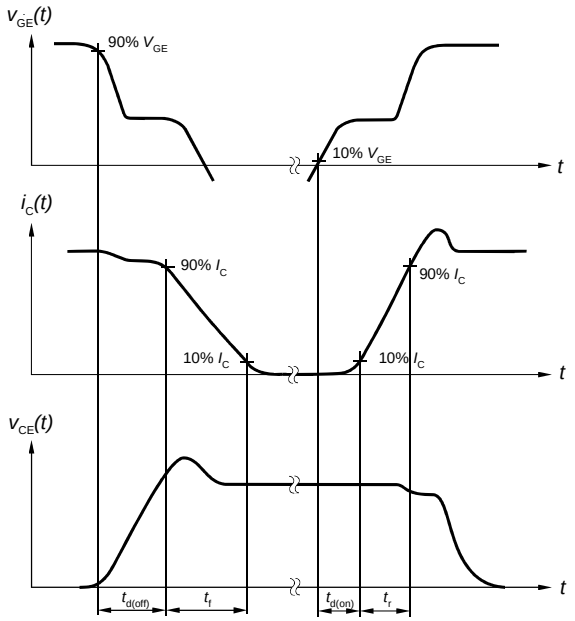



**Figure A. Definition of switching times**

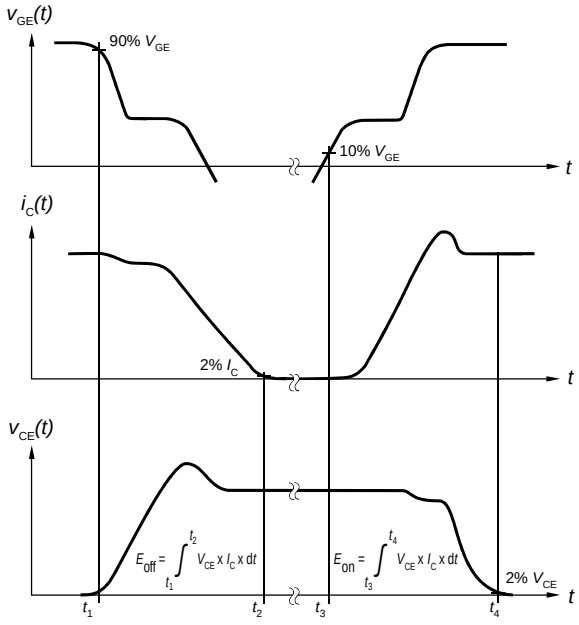



**Figure B. Definition of switching losses**

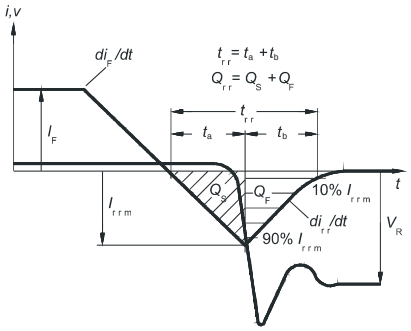



**Figure C. Definition of diodes switching characteristics**

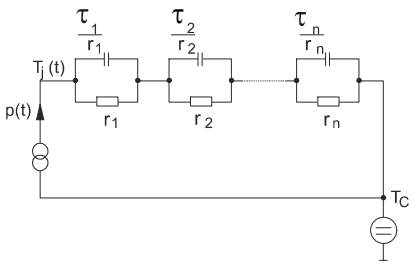



**Figure D. Thermal equivalent circuit**

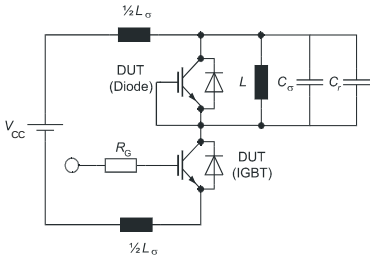



**Figure E. Dynamic test circuit**
Parasitic inductance $L_\sigma$,
Parasitic capacitor $C_\sigma$,
Relief capacitor $C_r$,
(only for ZVT switching)

Revision History

IDP08E65D2

Revision: 2014-08-28, Rev. 2.2

Previous Revision

| Revision | Date | Subjects (major changes since last revision) |
|---|---|---|
| 1.1 | 2013-03-13 | Preliminary data sheet |
| 2.1 | 2013-12-16 | New Marking Pattern |
| 2.2 | 2014-08-28 | Value VFmax limit according BE test |

We Listen to Your Comments
Any information within this document that you feel is wrong, unclear or missing at all ?
Your feedback will help us to continuously improve the quality of this document.
Please send your proposal (including a reference to this document) to: erratum@infineon.com

Published by
Infineon Technologies AG
81726 Munich, Germany
81726 München, Germany
© 2014 Infineon Technologies AG
All Rights Reserved.

Legal Disclaimer
The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information
For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (www.infineon.com).

Warnings
Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.
The Infineon Technologies component described in this Data Sheet may be used in life-support devices or systems and/or automotive, aviation and aerospace applications or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support, automotive, aviation and aerospace device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.