

6


5

4


3

2

1

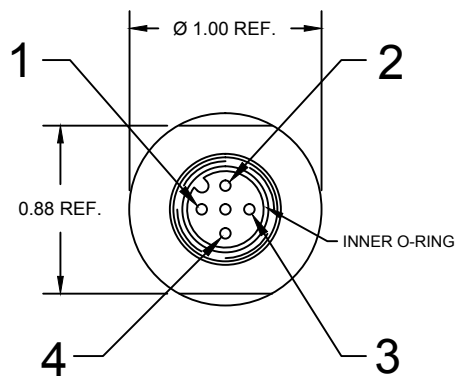

FACE VIEW - FEMALE

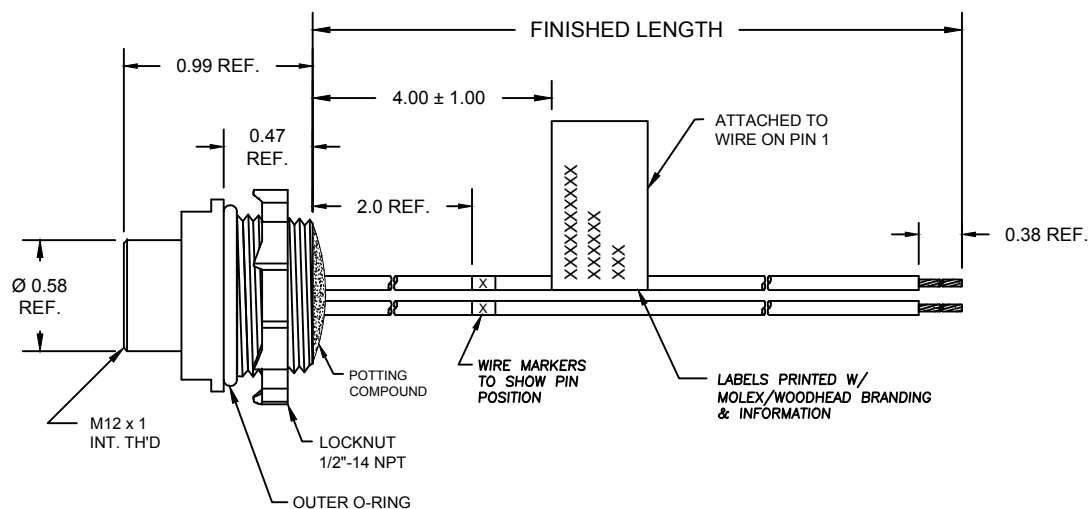

(B)
8R4000AB1MXXXN

FINISHED LENGTH
M010 - 1 METER
M100 - 10 METER

1	BLUE/YELLOW
2	BLUE/YELLOW
3	WHITE/BLUE
4	BLUE/YELLOW

SPECIFICATIONS:

SHELL MATERIAL: NICKEL PLATED ZINC DIECAST
CONTACT MATERIAL: GOLD/NICKEL OVER COPPER ALLOY
INSERT MATERIAL: BLACK NYLON
INNER O-RING: RED NITRILE
LOCKNUT: ZINC-PLATED STEEL
OUTER O-RING: BLACK NITRILE

WIRES: #18-1, PVC LEADS
ASSEMBLY RATING: 250V, 4A

ENVIRONMENTAL: -20°C TO 105°C
IP67 WHEN MATED

AGENCY: UL LISTED

ADD PIN MATRIX EC NO: IGC2017-0064 DRWN: MZELINS 2016/07/19 CHKD: VOU 2016/07/19 APPR: BWOODMAN 2012/03/20			DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE INCH ONLY		SCALE 1:1	DESIGN UNITS INCH	⊙ THIRD ANGLE PROJECTION	
							DRAWN BY VOU	DATE 2011/01/27	TITLE M12 MICRO-CHANGE RECEPT 4P F/FR 1/2 NPT MOUNT #18-1 PVC WIRES				
							CHECKED BY LHARTMAN	DATE 2012/02/17					
							APPROVED BY JFMURPHY	DATE 2012/03/20					MOLEX INCORPORATED
					ANGULAR ±1/2°			MATERIAL NO. SEE CHART		DOCUMENT NO. SD-120070-026			SHEET NO. 1 OF 1
					DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE A		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			