

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/22/11	


APPROVED: _____

DATE: _____ TITLE: _____

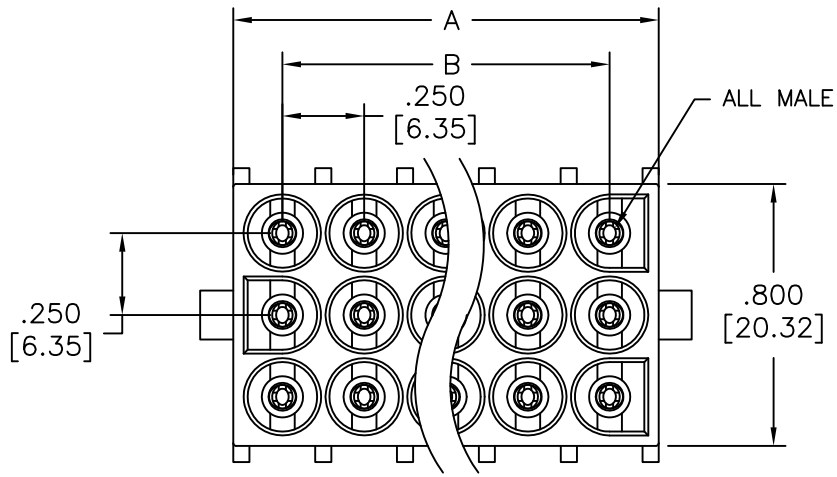

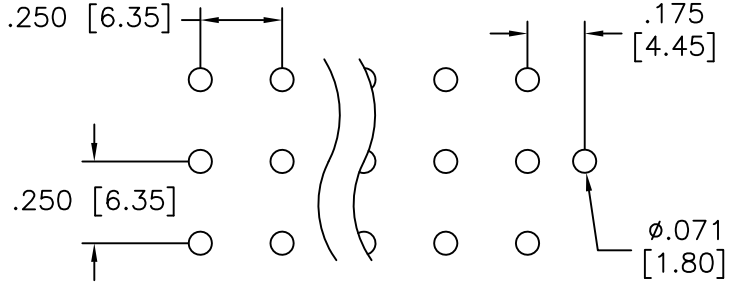

Recommended PCB Layout

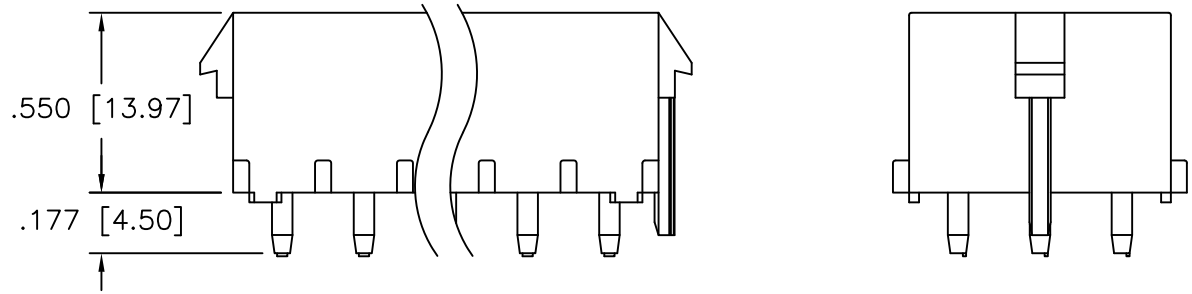

SPECIFICATIONS:
Material:
Insulator: Nylon 66, rated UL 94V-2
Insulator color: Natural
Contacts: Phosphor Bronze
Plating:
Tin over Nickel underplate overall
Electrical:
Operating voltage: 600 VAC max
Current rating: 13 Amps max.
Insulation resistance: 1000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 5000 VAC for 1 minute
Mechanical:
Temperature Rating:
Operating temperature: -25°C to +85°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

A = .250 [6.35] X No. of Positions + .050 [1.27]
B = .250 [6.35] X No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	4/22/11
CHECKED	RC	4/22/11
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: 6.35mm PITCH POWER CONNECTORS
MALE PIN, TIN PLATED, WITH POLARIZING

SIZE	PART NO.	REV.
X	DME-XX-S-P-SQ	-


REF: S00123T | SCALE: NTS | SHEET 1 OF 2

Rev	AWO #	Description	Date	Appr
SEE SHT 1 OF 2 FOR REVISION				


APPROVED: _____

DATE: _____ TITLE: _____


6 POSITION




12 POSITION

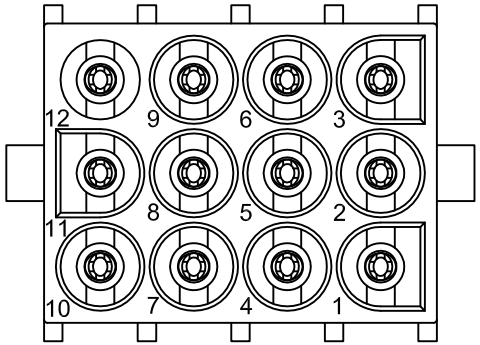

9 POSITION

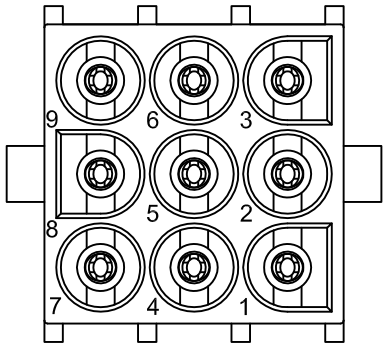

15 POSITION

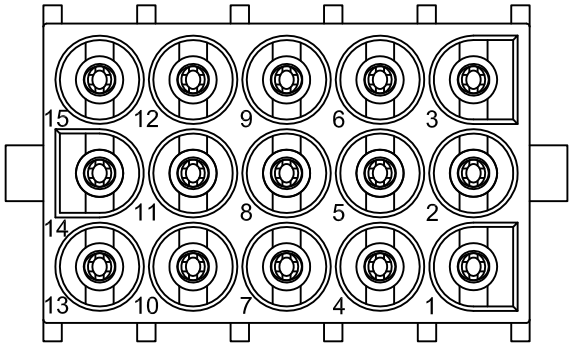

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	4/22/11
CHECKED	RC	4/22/11
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: 6.35mm PITCH POWER CONNECTORS
MALE PIN, TIN PLATED, WITH POLARIZING

SIZE	PART NO.	REV.
X	DME-XX-S-P-SQ	-

REF:	SCALE:	SHEET
S00123T	NTS	2 OF 2