
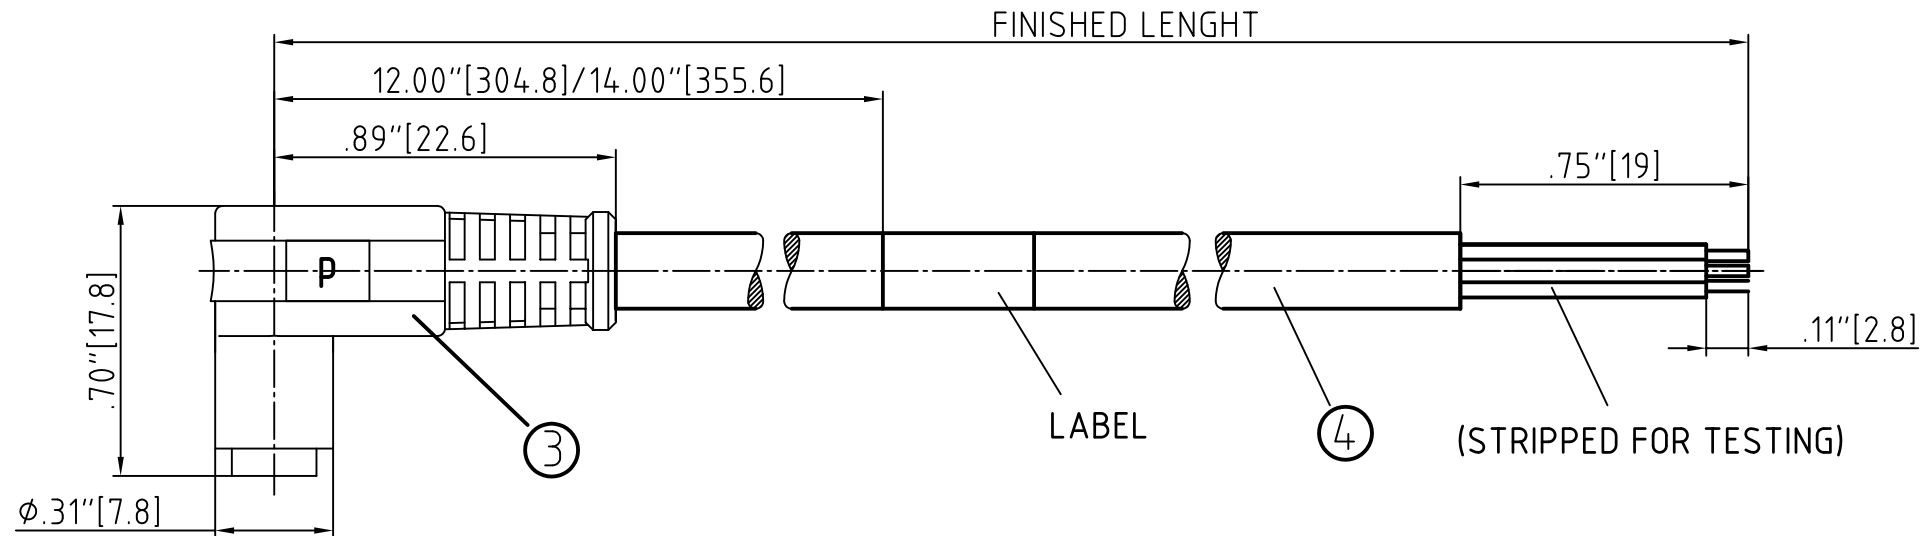
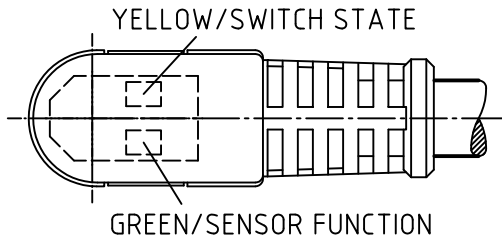


3 POLE
PNP-NORMALLY OPEN=YELLOW-GREEN

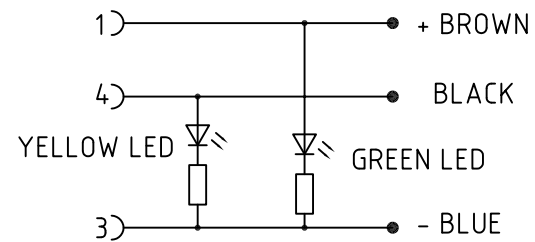

POLE	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH IN/MM
3	1200880099	5030P1A10M020	6.56' +3.50" -0 [2.0M +88.9 -0]
3	1200880100	5030P1A10M050	16.40' +6.50" -0 [5.0M +165.1 -0]
3	1200880101	5030P1A10M100	32.81' +12.50" -0 [10.0M +317.5 -0]

CONNECTOR SPECIFICATION:

VOLTAGE RATING	3-4POL:10-30V/DC
AMPERAGE RATING	3 AMPS
PROTECTION	IP65
OPERATING TEMPERATURE	-20°C TO +105°C
UL CERTIFICATIONS	UL listed, File #E152210
CSA CERTIFICATIONS	CSA CERTIFIED, File LR6837

ITEM	COMPONENT	MATERIAL	FINISH
1	INSERT	POLYURETHANE (PUR)	BLACK
2	CONTACT SOCKET	COPPER ALLOY	GOLD OVER NICKEL
3	OVERMOLD	PVC	CLEAR
4	CABLE- 24 AWG, (COPPER STRANDING) 3 CONDUCT. 300V	JACKET: PVC	YELLOW

DESCRIPTION EC NO: WEU2010-0300 DRWN: REISSNER 2010/01/25 CHKD: FP APPR: NSTAUDIG 2010/01/29		QUALITY SYMBOLS ▽ = 0 ▽C = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
				mm	INCH	DRAWN BY DATE REISSNER 2010/01/25		NC 3P FE 90 LED SNAP 24AWG PVC CABLE ----			
			4 PLACES	±---	±---	CHECKED BY DATE FP 2010/01/20					
			3 PLACES	±---	±---	APPROVED BY DATE NSTAUDIG 2010/01/28		molex MOLEX INCORPORATED			
2 PLACES	±---	±.01									
1		REV	1 PLACE	±0.3	±---	MATERIAL NO. SEE TABLE		DOCUMENT NO. SD-120088-003		SHEET NO. 1	
			ANGULAR ± --- °			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS								