


TITLE	PART No.	REV	PAGE
32 AWG, 100 Ohm, Twinax Cable	<b>100TX-08</b>	2	1 of 1

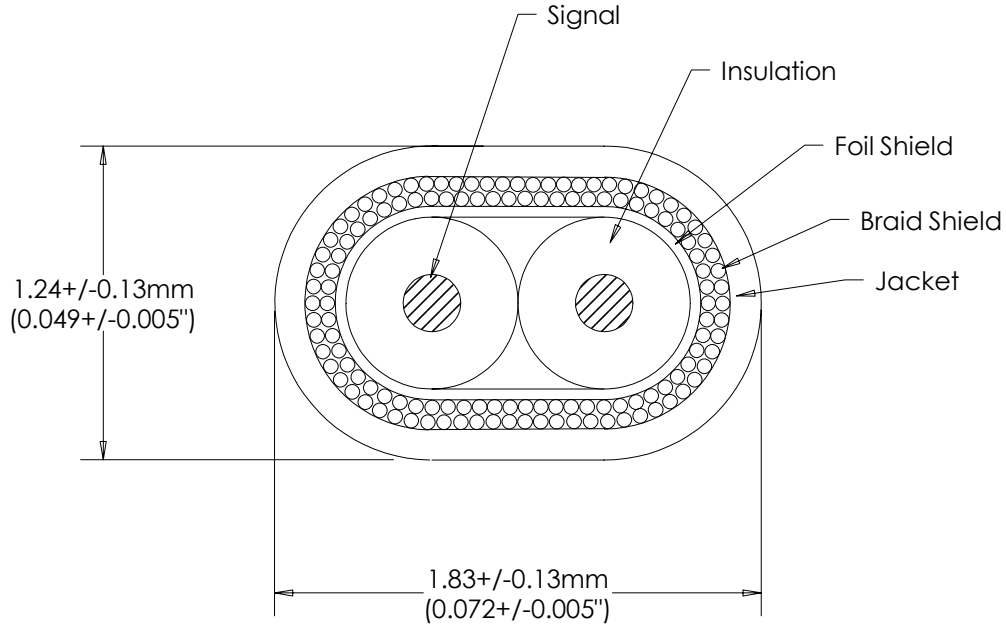

**NOTES**

Signal: 32 AWG, Solid Silver Plated Copper

Insulation: FEP, 0.0235" +/- 0.001"

Color: One Blue, One Green

Shield: Aluminum/Polyester Tape Wrap (Aluminum Side Out)

Braid Shield: 44 AWG Tin Plated Copper, >90% Coverage

Jacket: Polyurethane, 0.006" Wall Thickness, Black

Differential Impedance: 100 +/- 5 Ohms

Capacitance: 14.5 pF/ft

Propagation Delay: 1.46 +/- 0.01 ns/ft

Within Pair Skew: <5ps/ft

This document is the property of TEMP-FLEX. It may not be disclosed, reproduced, or otherwise used without permission.	Rev	DCR	Description	App'd	Date
	1	2575	Initial Release.	KP	4/20/11
	2 2	2846 3119	Jacket Insulation Material to Polyurethane. Updated Specification Template	KP KP	1/5/12 11/5/12