

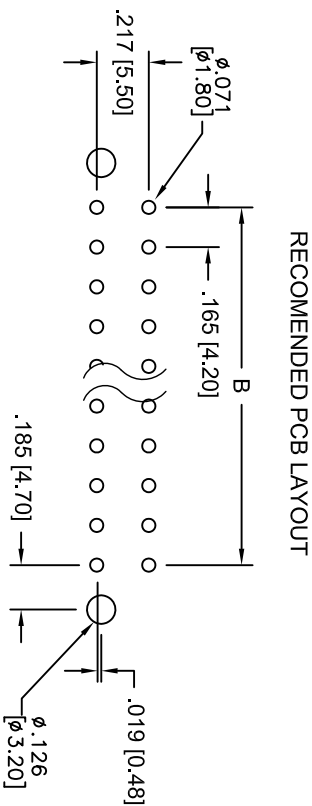
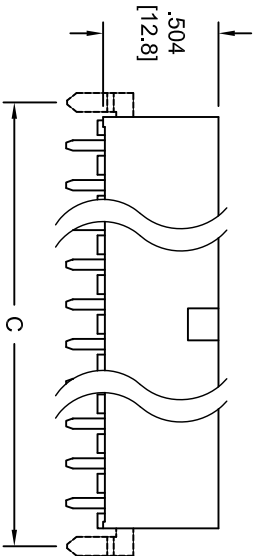


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/16/04	
A		REVISED SPEC.	5/17/11	

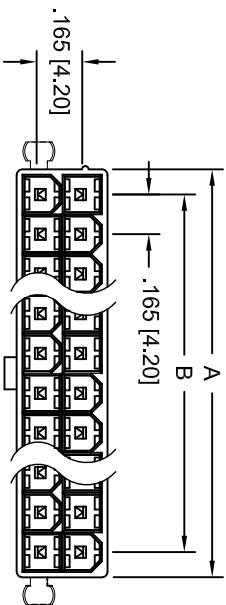

SPECIFICATIONS:
Material: Nylon 66, rated UL 94V-2
Insulator color: Natural
Contacts: Brass
Plating: Tin over Copper underplate overall
Electrical:
Operating voltage: 250 VAC max
Current rating: 7 Amps max
Insulation resistance: 1000 Mohms min
Dielectric withstanding voltage: 1500 VAC for 1 minute
Temperature Rating: Operating temperature: -25°C to +85°C
Environmental: Lead free, RoHS compliant.

A

B

C

D

A

B

C

D

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

STRAIGHT HOUSING, MALE TERMINAL
PCB MOUNT WITH PEGS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES				Holes			
.X	± .10	Ø.X	± .10	.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015	.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010	.XXX	± .015	Ø.XXX	± .010
APPROVALS				DATE			
DRAWN				SS			
				9/16/04			
CHECKED							
APPROVED							
TITLE				SIZE			
				X			
REF:				S00016T			
SCALE:				NTS			
SHEET				1 OF 1			

6

5

4

3

2

1

6

5

4

3

2

1

APPROVED: _____

DATE: _____ TITLE: _____


Rev AWO # Description Date Appr

SEE SHT 1 OF 2 FOR REVISION


D

D


2 POSITION




8 POSITION



14 POSITION




20 POSITION




C

C


4 POSITION




10 POSITION



16 POSITION




22 POSITION




B

B


6 POSITION




12 POSITION



18 POSITION



24 POSITION



A

A

ADAM TECH

909 Railway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE STRAIGHT HOUSING, MALE TERMINAL
PCB MOUNT WITH PEGS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED			
INCHES	HOLES	ØXX	±.10
.X	±.10	ØXX	±.10
.XX	±.020	ØXXX	±.015
.XXX	±.015	ØXXX	±.010
APPROVALS:		DATE	
DRAWN	SS	9/16/04	
CHECKED			
APPROVED			
SIZE	PART NO.	REV.	
X	DMF-XX-S-P	A	
REF:	SCALE: NTS	SHEET 2 OF 2	

6

5

4

3

2

1