Rev	AWO #	Description	Date	Appr
-		RELEASED	10/6/11	
A		REVISED SPEC.	12/6/13	AY/SL

APPROVED: _____

DATE: _____ TITLE: _____

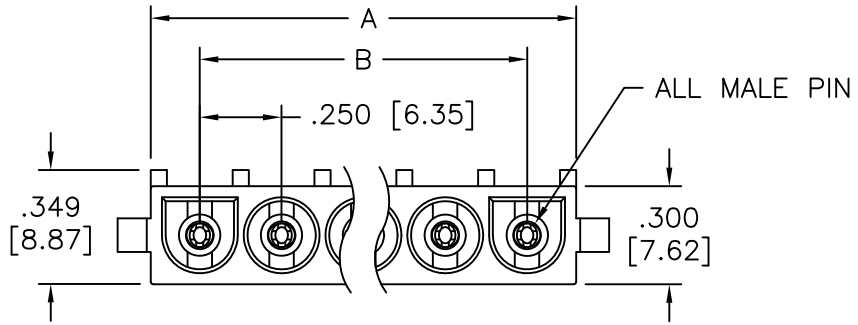

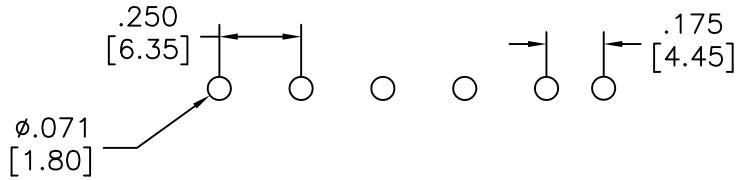

Recommended PCB Layout

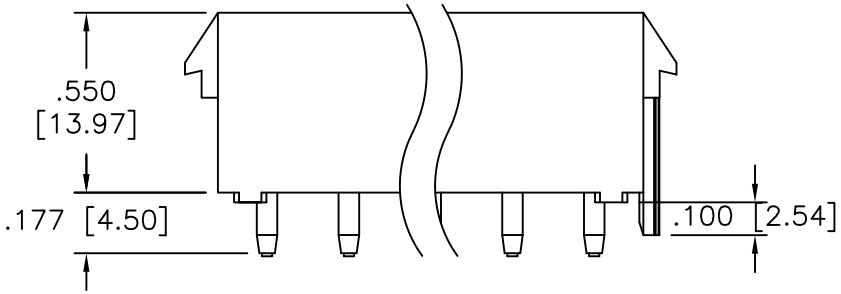



SPECIFICATIONS:
Material:
Insulator: Nylon 66, rated UL 94V-2
Insulator color: Natural
Contacts: Phosphor Bronze
Plating:
Tin over Copper underplate overall
Electrical:
Voltage rating: 600 V
Current rating: 2~4P: 13A, 6~10P: 11A
Dielectric withstanding voltage: 5000 VAC for 1 minute
Temperature Rating:
-55°C to +105°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

Poles: 02 thru 10
A = .250 [6.35] X No. of Positions + .050 [1.27]
B = .250 [6.35] X No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	10/6/11
CHECKED	LW	10/6/11
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: WIRE TO BOARD, FEMALE, 6.35mm PITCH WITH POLARIZING, SINGLE ROW TYPE

SIZE	PART NO.	REV.
X	DME-XX-S-P-S	A

REF: S00123T | SCALE: NTS | SHEET 1 OF 1