GlobTek, Inc.
www.globtek.com
186 Veterans Drive,
Northvale, NJ 07647
Tel. (201) 784-1000
Fax (201) 784-0111

Drawing Title: Nema 1-15P, North American (Type A) , Non-polarized, Nickel plated prongs, UL code YP-11 to IEC60320-C7, 2 Prong IEC receptacle, UL Code YC-13, GT Cable #111: 18 / 2 Conductors, 3.5X6.9mm OD, SPT-2, 60 Deg.C, 300V, SOLID/RIBBED, Approvals: , 1830mm, GlobTek Black	
Model No. Power Cord	
Part No./Ordering No. 4511116F703A(R)	Rev G1

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT https://www.globtek.com/connectors/ STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT https://www.globtek.com/connectors/ ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

In Addition to GlobTek Inc.'s renewed ISO9001:2008 - Quality Management System Certification, GlobTek Inc. is now certified to:

ISO13485:2003 - Medical Devices Quality Management System Certification
ISO14001:2004 - Environmental Management System Certification

ISO Certificates are available online at https://www.globtek.com/iso-certificates/
Prop 65 Statement:https://en.globtek.com/prop-65-statement.pdf

The acceptance of this specification and use of the product described in this document indicates the acceptance and binding of the customer to Globtek TERMS AND CONDITIONS (attached to the end of this document), which supersede all other agreements, terms, and conditions (https://en.globtek.com/terms-and-conditions/).

The purchaser of this product (Customer) agrees that it is their sole responsibility to determine suitability/fitness of the product described in this specification for their application and to take precautions for protection against any hazards attendant to the handling and use of the product.

Footnote:

GlobTek Inc. will not be liable for the safety and performance of these power supplies if unauthorized access and repair occurs. End user should consult applicable UL, CSA or EN standards for proper installation instruction.

Limitation of Use:

GlobTek products are intended for use with commercial, medical, and/or industrial equipment only. GlobTek product are not authorized for use as mission critical components in life support hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of GlobTek Inc.
Contents of this document are subject to change without prior notice.

Customer Approval of Specification:

Please approve, sign and send back to GlobTek so we can complete order processing.
A delay in receipt of this form will delay delivery schedule.

Company Name:	Customer P/N:
Quote Number:	Date:
Authorized Representative Name:	Authorized Representative Signature:

PROPRIETARY INFORMATION
PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2012 - 2022
guest /08/31/2022 6:55:30 PM

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: Nema 1-15P, North American (Type A) , Non-polarized, Nickel plated prongs, UL code YP-11 to IEC60320-C7, 2 Prong IEC receptacle, UL Code YC-13, GT Cable #111: 18 / 2 Conductors, 3.5X6.9mm OD, SPT-2, 60 Deg.C, 300V, SOLID/RIBBED, Approvals: , 1830mm, GlobTek Black	
	Model No. Power Cord	
	Part No./Ordering No. 4511116F703A(R)	Rev G1

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT https://www.globtek.com/connectors/ STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT https://www.globtek.com/connectors/ ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

REVISION HISTORY

REV	DESCRIPTION	SUB	DATE	APPROVED
G1	Update drawing	bsiep	05/09/2022	QA
G	Update spec to SF format, update cable drawing	QA	02/24/2020	QA
F	UPDATE RATING FROM 10A/125V TO 7A/125V, RFS. 27217, BS	jwarn	11/27/2019	QA
E	CORRECT LENGTH TOLERANCE	jsund	04/08/2011	QA

Cordset Information:
CordsetColor:GlobTek Black
Cord Length (mm):1830

NOTES:

Cable flammability rating: VW-1, FT2. Cable conductors are raw copper and non-plated/non-coated.


PROPRIETARY INFORMATION
PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2012 - 2022
guest /08/31/2022 6:55:30 PM

GlobTek, Inc.
www.globtek.com
186 Veterans Drive,
Northvale, NJ 07647
Tel. (201) 784-1000
Fax (201) 784-0111


Drawing Title: Nema 1-15P, North American (Type A) , Non-polarized, Nickel plated prongs, UL code YP-11 to IEC60320-C7, 2 Prong IEC receptacle, UL Code YC-13, GT Cable #111: 18 / 2 Conductors, 3.5X6.9mm OD, SPT-2, 60 Deg.C, 300V, SOLID/RIBBED, Approvals: , 1830mm, GlobTek Black	
Model No. Power Cord	
Part No./Ordering No. 4511116F703A(R)	Rev G1

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT https://www.globtek.com/connectors/ STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT https://www.globtek.com/connectors/ ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

END A



END B

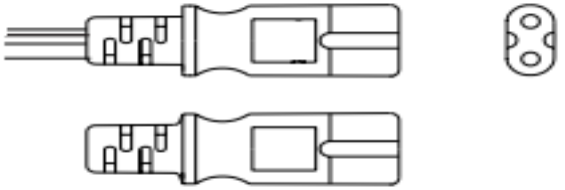


PROPRIETARY INFORMATION
PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2012 - 2022
guest /08/31/2022 6:55:30 PM

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: Nema 1-15P, North American (Type A) , Non-polarized, Nickel plated prongs, UL code YP-11 to IEC60320-C7, 2 Prong IEC receptacle, UL Code YC-13, GT Cable #111: 18 / 2 Conductors, 3.5X6.9mm OD, SPT-2, 60 Deg.C, 300V, SOLID/RIBBED, Approvals: , 1830mm, GlobTek Black	
	Model No. Power Cord	
	Part No./Ordering No. 4511116F703A(R)	Rev G1

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT https://www.globtek.com/connectors/ STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT https://www.globtek.com/connectors/ ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

CABLE IMAGE

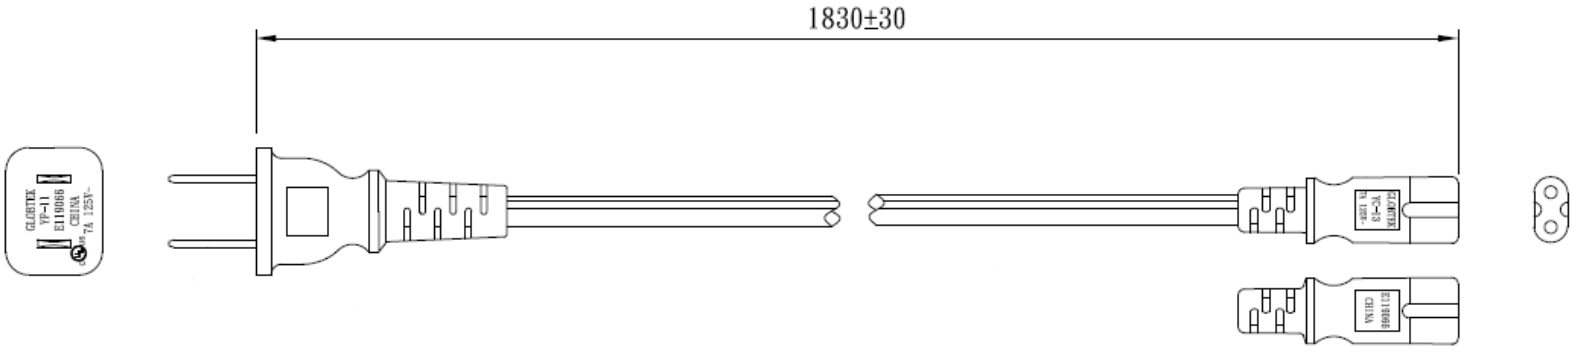

PROPRIETARY INFORMATION
PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2012 - 2022
guest /08/31/2022 6:55:30 PM

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: Nema 1-15P, North American (Type A) , Non-polarized, Nickel plated prongs, UL code YP-11 to IEC60320-C7, 2 Prong IEC receptacle, UL Code YC-13, GT Cable #111: 18 / 2 Conductors, 3.5X6.9mm OD, SPT-2, 60 Deg.C, 300V, SOLID/RIBBED, Approvals: , 1830mm, GlobTek Black	
	Model No. Power Cord	
	Part No./Ordering No. 4511116F703A(R)	Rev G1

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT https://www.globtek.com/connectors/ STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT https://www.globtek.com/connectors/ ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

End A	Cable	End B
Code:451 Description:Nema 1-15P, North American (Type A) , Non-polarized, Nickel plated prongs, UL code YP-11 Rating (V):125 Rating (A):15.0 Gender:Male Overmolded:Yes	Code:111 Description:GT Cable #111: 18 / 2 Conductors, 3.5X6.9mm OD, SPT-2, 60 Deg.C, 300V, SOLID/RIBBED, Approvals: Color:GlobTek Black Wire Gauge(AWG):18 Cond:2 Type:SPT-2 Temperature:60° C Amps:10 Volts:300 OD:3.5X6.9 ConductorsColors:SOLID/RIBBED	Code:703A Description:IEC60320-C7, 2 Prong IEC receptacle, UL Code YC-13 Rating (V):125 Rating (A):7.0 Gender:Female Overmolded:Yes

Overall cable rating:7A /125V AC

Plug Approvals		Cable Approvals		Connector Approvals	
OR		E119066 (UL/CUL file number, no logo)		E119066 (UL/CUL file number, no logo)	
Note: North American power cords are certified as assemblies of UL rated parts, so, the combination of UL certified plugs, connectors, andf cables total up to a UL approved cordset or cable assembly LINK TO CERTs Link to live Power Cords listing @ UL Link to live Flexible Cord listing @ UL	UL CSA or CUL	Note: North American power cords are certified as assemblies of UL rated parts, so, the combination of UL certified plugs, connectors, and cables total up to a UL approved cordset or cable assembly LINK TO CERTs Link to live Power Cords listing @ UL Link to live Flexible Cord listing @ UL	UL-CUL (File number only)	Note: North American power cords are certified as assemblies of UL rated parts, so, the combination of UL certified plugs, connectors, and cables total up to a UL approved cordset or cable assembly LINK TO CERTs Link to live Power Cords listing @ UL Link to live Flexible Cord listing @ UL	UL-CUL (File number only)

AGENCY ONLINE DOCUMENTS http://en.globtek.com/cordsets/

PROPRIETARY INFORMATION
PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2012 - 2022
guest /08/31/2022 6:55:30 PM

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: Nema 1-15P, North American (Type A) , Non-polarized, Nickel plated prongs, UL code YP-11 to IEC60320-C7, 2 Prong IEC receptacle, UL Code YC-13, GT Cable #111: 18 / 2 Conductors, 3.5X6.9mm OD, SPT-2, 60 Deg.C, 300V, SOLID/RIBBED, Approvals: , 1830mm, GlobTek Black	
	Model No. Power Cord	
	Part No./Ordering No. 4511116F703A(R)	Rev G1

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT https://www.globtek.com/connectors/ STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT https://www.globtek.com/connectors/ ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

RoHS/RoHS3 Declaration	https://www.globtek.com/pdf/rohs_cert/01t30000002p7F2AAI
REACH Declaration	https://www.globtek.com/pdf/iso_certificates/REACH.pdf
Conflict Minerals Declaration	https://www.globtek.com/pdf/conflict-minerals.pdf
Prop 65 Statement	https://en.globtek.com/prop-65-statement.pdf
CE.UKCA.Cord	https://globtek.secure.force.com/spec/ec_decl_product_model_family_incl_cord?id=01t30000002p7F2

IPXY rating is based on 3rd party testing and customers should check suitability and test system level IPXY rating before ordering.

PROPRIETARY INFORMATION
PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2012 - 2022
guest /08/31/2022 6:55:30 PM


GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: Nema 1-15P, North American (Type A) , Non-polarized, Nickel plated prongs, UL code YP-11 to IEC60320-C7, 2 Prong IEC receptacle, UL Code YC-13, GT Cable #111: 18 / 2 Conductors, 3.5X6.9mm OD, SPT-2, 60 Deg.C, 300V, SOLID/RIBBED, Approvals: , 1830mm, GlobTek Black	
	Model No. Power Cord	
	Part No./Ordering No. 4511116F703A(R)	Rev G1

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT https://www.globtek.com/connectors/ STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT https://www.globtek.com/connectors/ ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

Hanking:125

Description:125 +/- 25mm

Image:

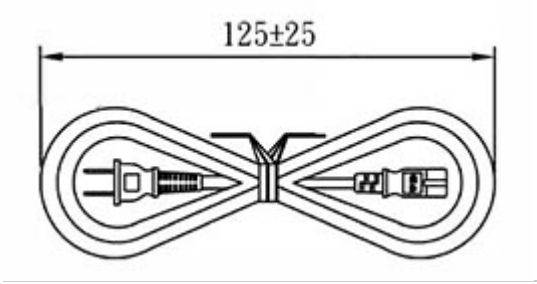

Notes/Modifications/Customizations (notes in this section supersede the values shown in the standard spec):

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2012 - 2022

guest /08/31/2022 6:55:30 PM