
Für diese Unterlage behalten wir uns alle Rechte vor, auch für den Fall der Patenterteilung oder Gebrauchsmustereintragung. Sie darf ohne unsere vorherige schriftliche Zustimmung weder vervielfältigt noch sonstwie benutzt, noch Dritten zugänglich gemacht werden.

Nur rot gestempelte oder auf Laufkarte gedruckte Dokumente unterliegen dem Änderungsdienst und sind zur Fertigung freigegeben.
Only red stamped or on jobcard printed documents are managed. These documents are approved for production.


All Rights reserved, including possible patents or trademarks. Documents shall not be provided to a third party or duplicated in any form without prior written permission.

CAD: Pro/ENGINEER


Additional coding
View in direction B

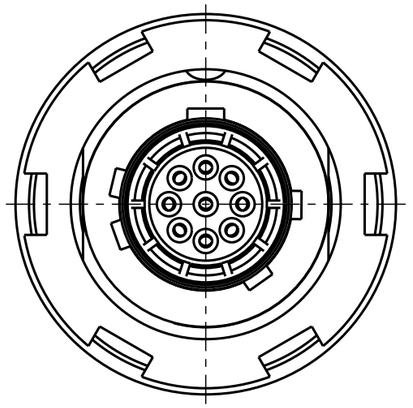

G80YBR-P09WCDO-000L
Mechanical coding: B
Color Coding: red

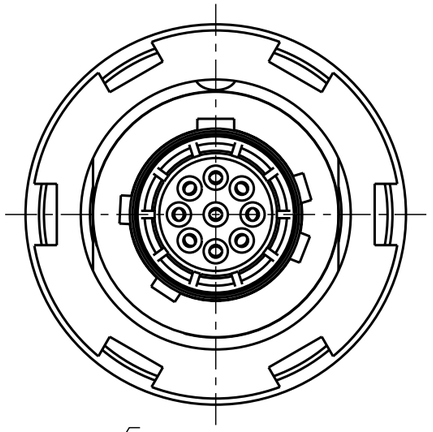



G80YCR-P09WCDO-000L
Mechanical coding: C
Color Coding: blue

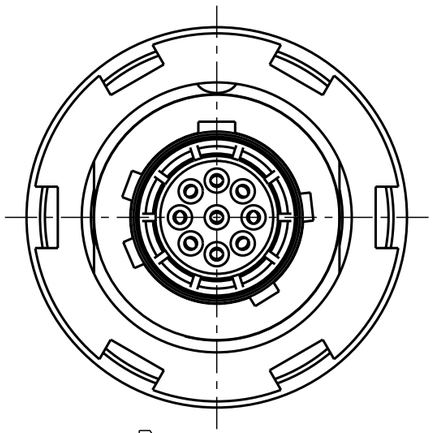


G80YDR-P09WCDO-000L
Mechanical coding: D
Color Coding: green


Panel cut-out

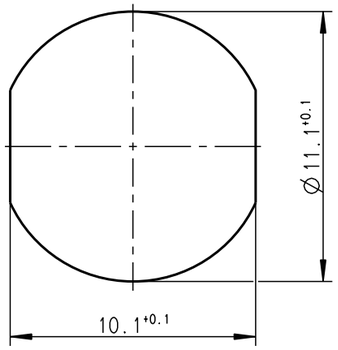

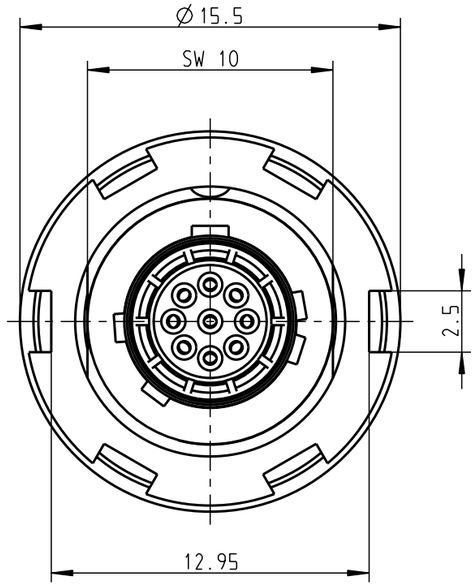


G80YAR-P09WCDO-000L
Mechanical coding: A
Color Coding: light brown

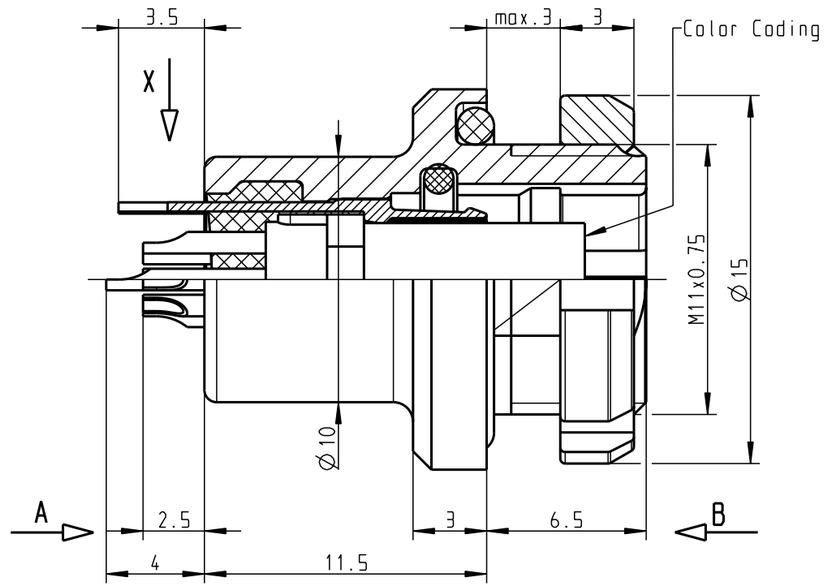

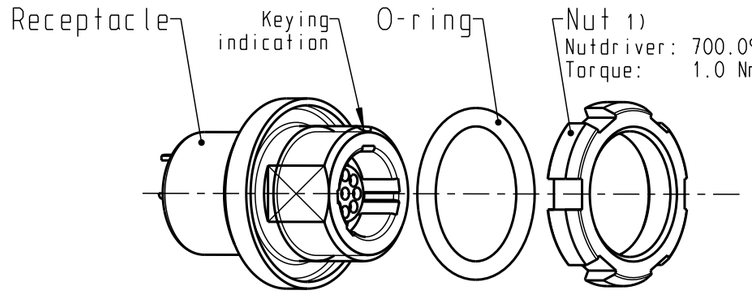


Delivery condition
2:1

X
Solder area
Earth tag



Only insert and earth tag
View in direction A
8:1

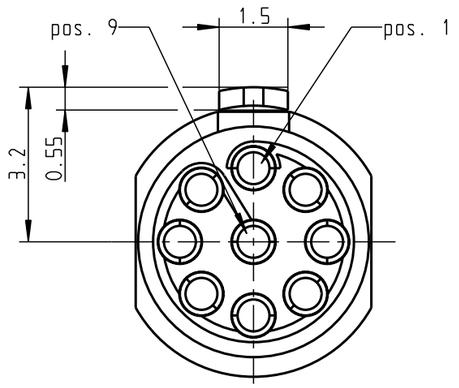

Technical information

- Solder contacts: AWG26
- Current load: 5A@Δt40° (Single contact)
  3.25A@Δt40° (Insert)
- Test voltage: 600V (acc. SAE AS 13441:1998,Contact to contact)
- Rated voltage: 200V (acc. SAE AS 13441:1998) 2)

- For more technical information and accessories see catalogue (www.odu.de/amc)

1) ODU recommend an additional locking of the nut with adhesive (e.g. Loctite 2701) to the screw thread.

2) Maximal operating voltage at sea level up to 2.000m. Rated voltage applies no other electrical safety standard. In case other standards rule a specific use of the connector, the application specific safety criteria shall be considered first. This must be evaluated in the frame of equipment engineering.

All shown connectors are according to DIN EN 61984:2009
conectors without breaking capacity (COC) !

index	notice	date	name

Dimensions without tolerances acc. to middle DIN ISO 2768

	date	name
2011		
prep.	22.12.	M. Meier
app.		
norm.		

otto dunkel gmbh

PE-modell-nr.:

CAD-nr.: 00051393

sheet.:

designation:
Receptacle style 8
AMC Standard Version

scale: 4:1

drawing nr.: G80Y.R-P09WCDO-000L

replacement for:

copy nr.