

MICRO SWITCH
a Honeywell Division
FED.MFG.CODE 91929

SWITCH – BASIC

CATALOG LISTING
V3L-3296
CO-X2787

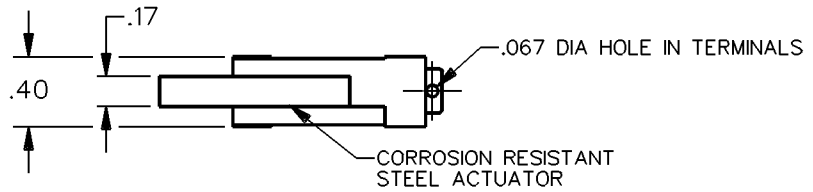

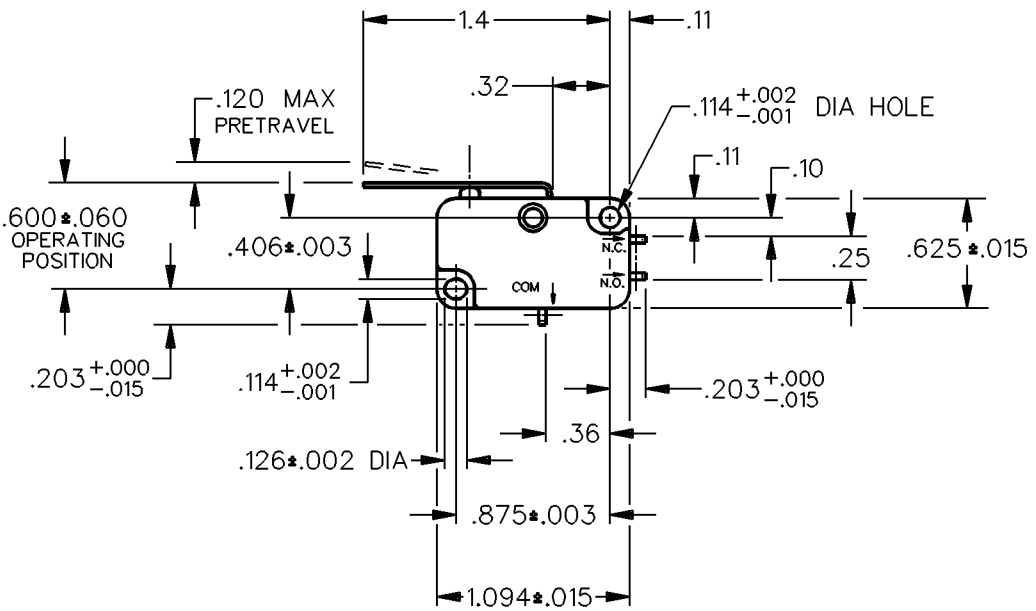

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS	
OPERATING FORCE	88 GRAM MAX
RELEASE FORCE	6 GRAM MIN
DIFFERENTIAL TRAVEL	.032 MAX
OVERTRAVEL	.090 MIN
RELEASE TRAVEL	.017 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L83
15.1A 1/2HP 125, 250 VAC
1/2A 125 VDC, 1/4A 250 VDC
5A 125 VAC "L"

SCALE FULL — DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT

CATALOG LISTING V3L-3296
ISSUE 3 M
REPLACES
RELEASE NO. PR-16061
CHECK

REVISIONS

A	PR-16061	MAM 10 DEC 87
B	CO-76298	JAK 11 NOV 93

CHECK
CHECK
12 DEC 87 GLH
CHECK
10 DEC 87 MAM
DRAWN DDM/CAD