

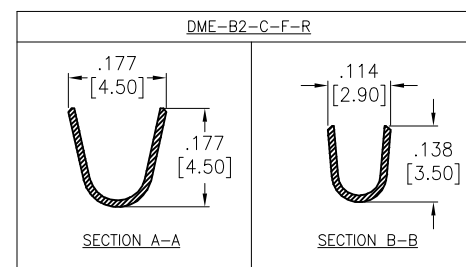
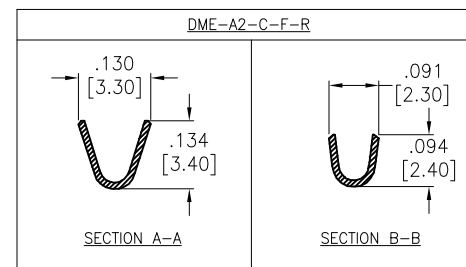
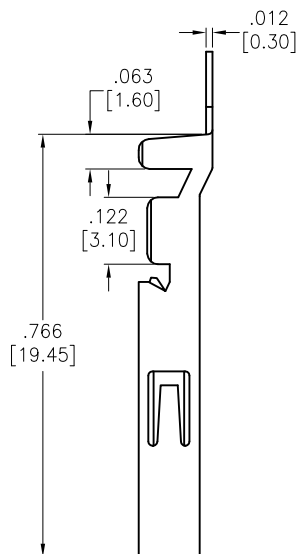


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

| Rev | AWO # | Description | Date    | Appr |
|-----|-------|-------------|---------|------|
| -   |       | RELEASED    | 6/20/19 |      |

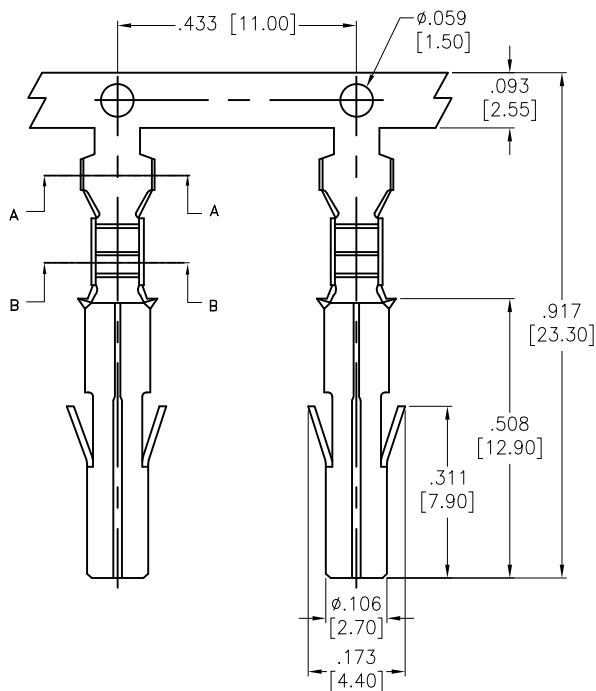

#### SPECIFICATIONS:

Material:

Contacts: Brass, Tin Plated, Thickness: 0.3mm

Electrical:

Voltage rating: 600 VAC/DC

Current rating: 2~5 Circuit 12 A AC/DC

6~15 Circuit 9 A AC/DC

Contact resistance: 20 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 2900 VAC For 1 Minute

Mechanical:

Wire: A: AWG# 18~22

B: AWG# 16~20

Temperature Rating:

-40°C to +105°C

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED

| INCHES      | HOLES        |
|-------------|--------------|
| .X ± .10    | Ø.X ± .10    |
| .XX ± .020  | Ø.XX ± .015  |
| .XXX ± .015 | Ø.XXX ± .010 |

| APPROVALS |    | DATE    |
|-----------|----|---------|
| DRAWN     | LH | 6/20/19 |
| CHECKED   | TY | 6/20/19 |
| APPROVED  |    |         |

**ADAM**  
**TECH**  
 INTERCONNECTS

909 Rahway Avenue,  
 Union, NJ 07083  
 Phone: 908-687-5000  
 Fax: 908-687-5710

| TITLE                                   |              |              |  |
|-----------------------------------------|--------------|--------------|--|
| CRIMP CONTACT, DME SERIES<br>TIN PLATED |              |              |  |
| SIZE                                    | PART NO.     | REV.         |  |
| X                                       | DME-X2-C-F-R | -            |  |
| REF: S00124T                            | SCALE: NTS   | SHEET 1 OF 1 |  |