


MATERIAL NUMBER	OLD PART NUMBER	FINISHED LENGTH
1200708180	8R5A06A18A120	1.0FT. +.75IN -0 [25M +19.1mm -0]

RECEPTACLE FACE VIEW

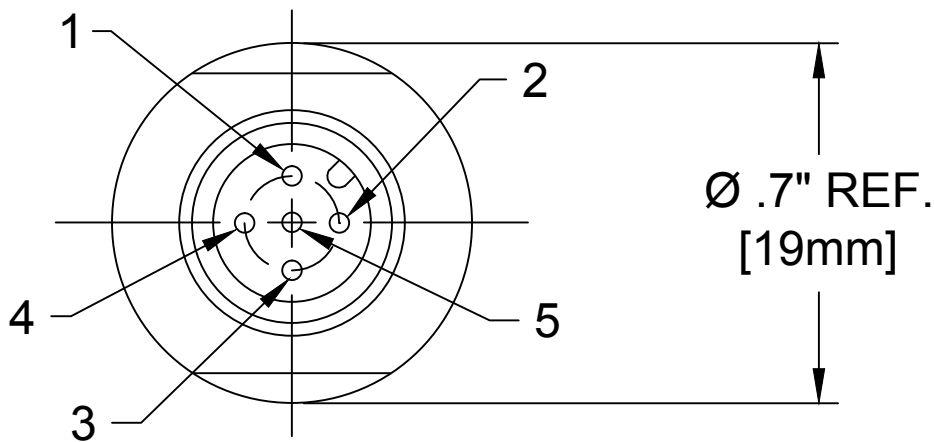


WIRING DIAGRAM

1	BROWN
2	WHITE
3	BLUE
4	BLACK
5	GREY

SPECIFICATION DATA

COMPONENT	MATERIAL	FINISH
LABEL	VINYL	BLACK/YELLOW
LOCKNUT	STEEL	ZINC PLATED
O-RING	NITRILE	BLACK
CONTACT SOCKET	COPPER ALLOY	Au OVER Ni
MALE INSERT	NYLON	BLACK
SHELL FM 1/4 NPT	ALUMINUM	BLACK ANODIZED
WIRE #22	PVC	
VOLTAGE RATING:	250V	
AMPERAGE RATING:	4A	
PROTECTION CLASS:	IP 67	
WIRE TEMPERATURE:	-10°C / 80°C	

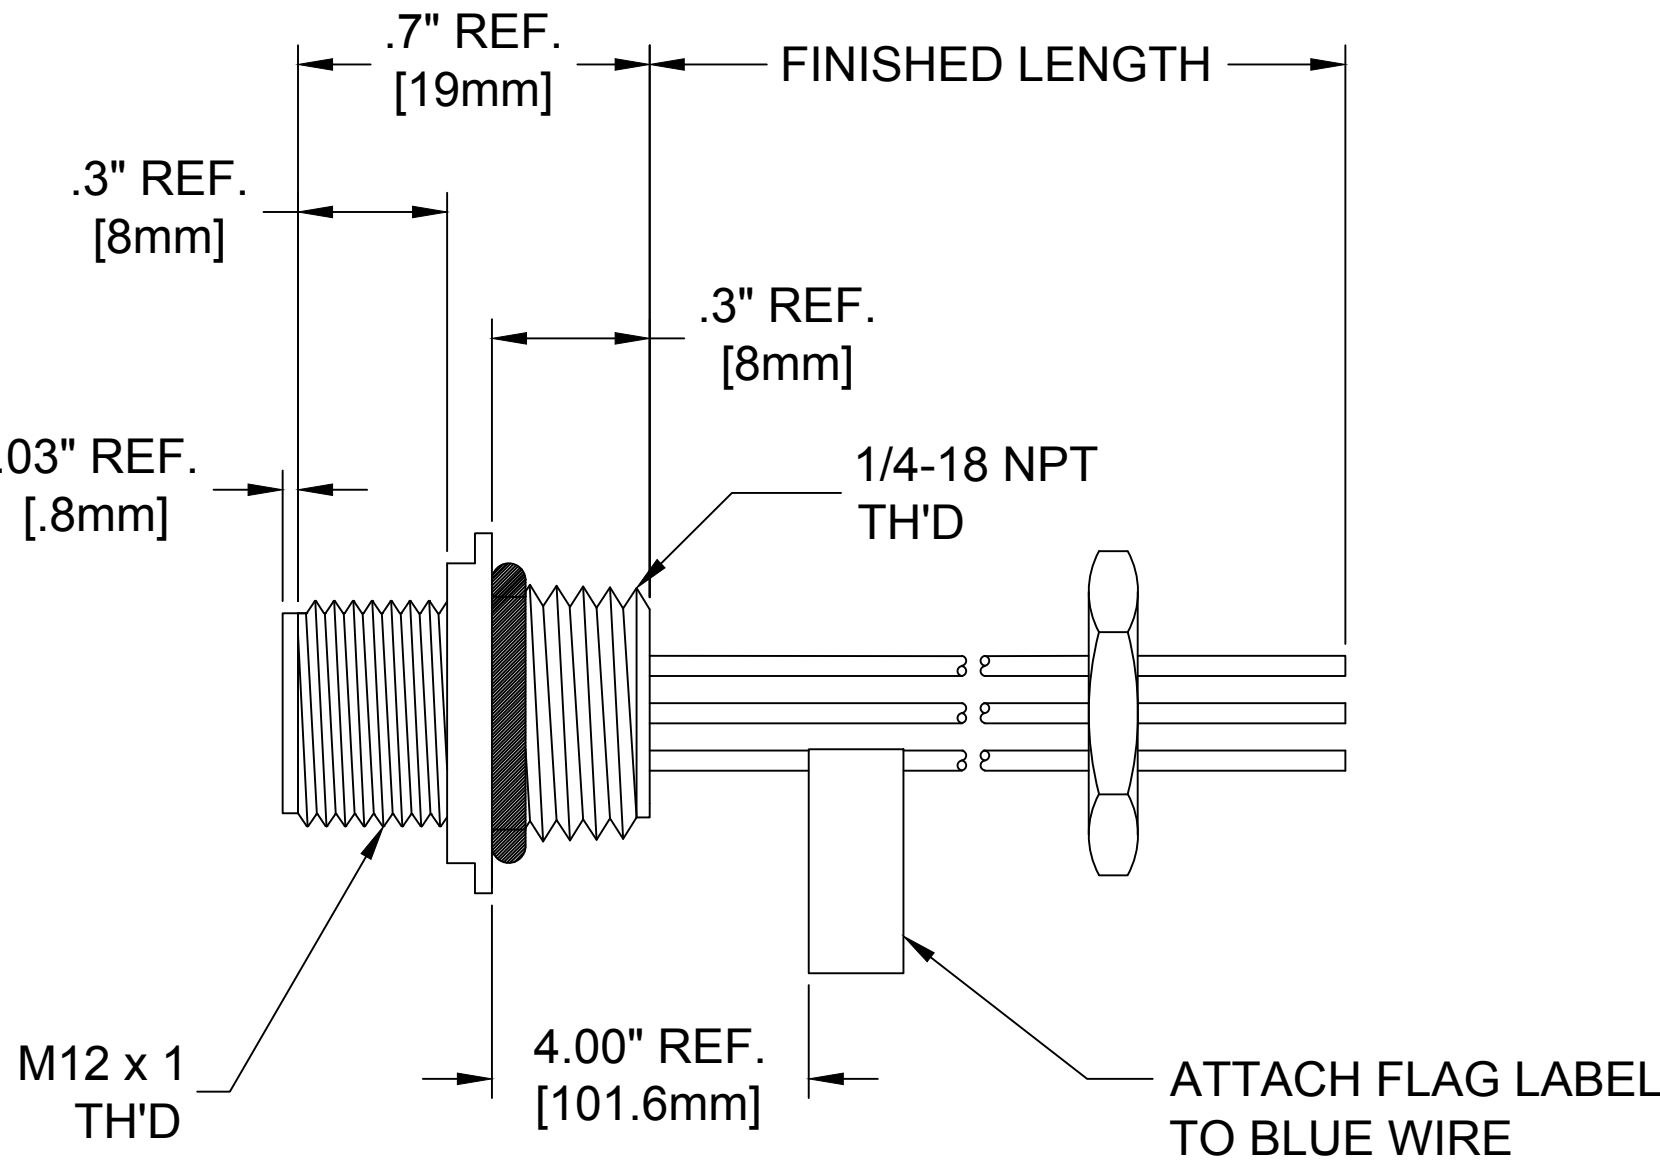

8R5A06A18A120

wire type
#22 PVC

cable length
010----1 Inch
120----12 Inches

ADD FLAG LABEL EC NO: ICG2016-1559 DRWN: MZIELINS 2016/06/10 CHKD: KC0X01 2016/06/21 APPR: TWOLDEGE 2013/12/12	DESCRIPTION REV	QUALITY SYMBOL ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION			
				mm	INCH	DRAWN BY GGUSTAFS	DATE 2013/10/31	TITLE MICRO- CHANGE ASSY 5 POLE MR 1/4NPT #22AWG PVC					
			4 PLACES	±---	±---	CHECKED BY VOU	DATE 2013/11/16						
			3 PLACES	±---	±.005	APPROVED BY BWOODMAN		DATE 2013/12/12	molex	MOLEX INCORPORATED			
			2 PLACES	±0.13	±.010	MATERIAL NO. SEE CHART		DOCUMENT NO. SD-120070-051					
			1 PLACE	±0.25	±.020	SIZE C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
			ANGULAR ±1/2°			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS							