

| Rev | AWO # | Description | Date | Appr |
|---|---|---|---|---|
| - | | RELEASED | 12/17/09 | |
| A | | UPDATED 1 & B DIMENSIONS | 1/15/15 | |
| B | | UPDATE DRAWING | 6/7/18 | AY/KC |

APPROVED: _____


DATE: _____ TITLE: _____

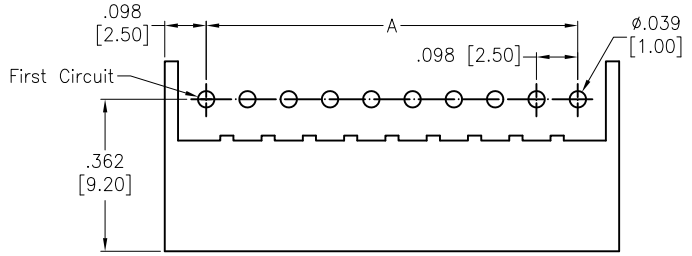



RECOMMENDED PCB LAYOUT





2P

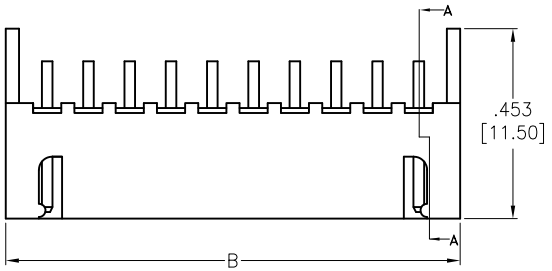

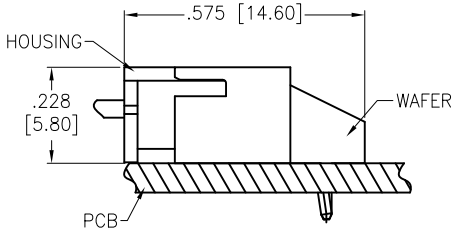
ASSEMBLY VIEW

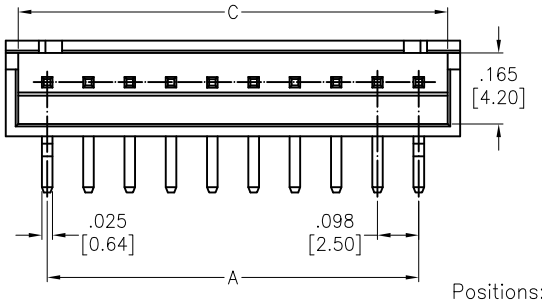


Positions: 02 thru 20
A = .098 [2.50] x of Spaces
B = .098 [2.50] x of Spaces +.197 [5.00]
C = .098 [2.50] x of Spaces +.138 [3.50]

SPECIFICATIONS:
Material:
Insulator: Nylon 66, rated UL 94V-0
Insulator color: Nature
Contacts: Brass, Tin plated
Electrical:
Voltage rating: 250V AC/DC
Current rating: 3A AC/DC
Contact resistance: 20 mohms max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating:
-25°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

| INCHES | | HOLES | |
|---|---|---|---|
| .X | ± .10 | Ø.X | ±.10 |
| .XX | ± .020 | Ø.XX | ±.015 |
| .XXX | ± .015 | Ø.XXX | ±.010 |

| APPROVALS | | DATE |
|---|---|---|
| DRAWN | DY | 12/17/09 |
| CHECKED | | |
| APPROVED | | |


ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710


TITLE
.098 [2.50] SHROUDED HEADER, RIGHT ANGLE

| SIZE | PART NO. | REV. |
|---|---|---|
| X | 25SH-B-XX-TR | B |

REF: S00124T | SCALE: NTS | SHEET 1 OF 1