
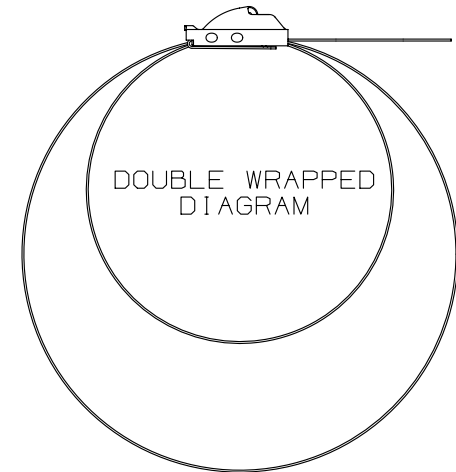


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	PACKAGE QUANTITY	MAXIMUM BUNDLE DIAMETER	LENGTH = "L" ±.2 [ 5 ]
MLT2DH-L	50	2.0" [ 50 ]	18.5" [ 470 ]
MLT4DH-L	50	4.0" [ 101 ]	28.0" [ 711 ]
MLT5DH-L	50	5.0" [ 127 ]	34.0" [ 863 ]
MLT6DH-Q	50	6.0" [ 152 ]	40.0" [ 1016 ]

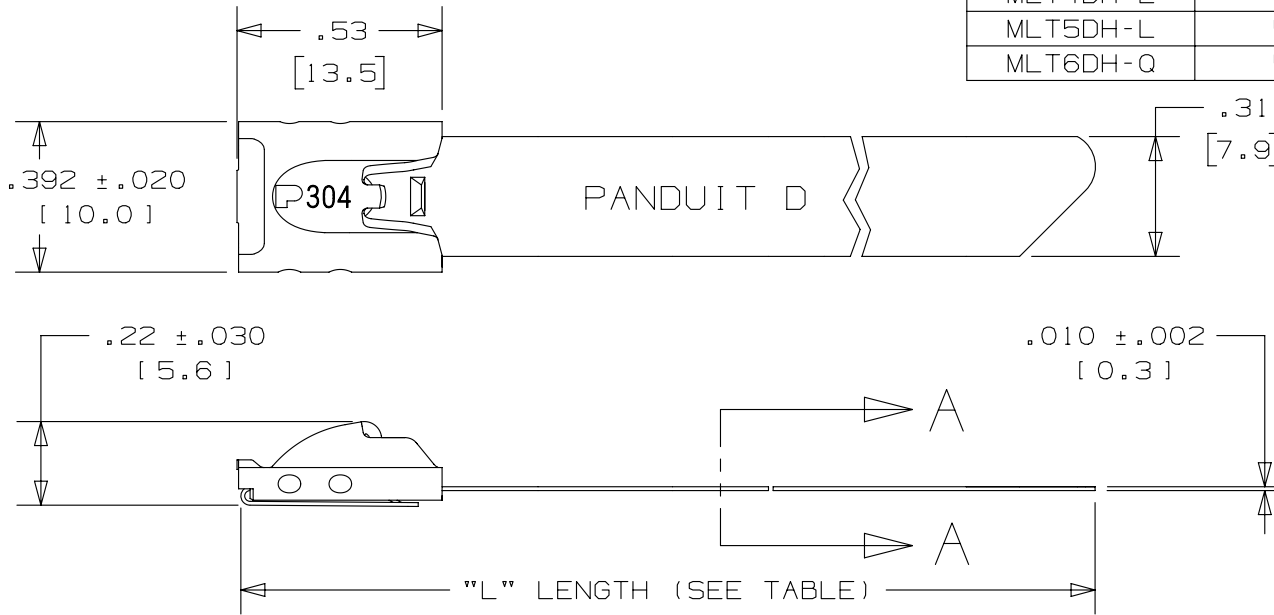

BODY WRAPS AROUND TWO TIMES  
ENTERING HEAD TWICE  
(NOT TO SCALE)

- NOTES:
1. APPLICATION TOOLS - GS4MT, PPTMT, ST2MT, ST3MT, AND HTMT
  2. MINIMUM LOOP TENSILE STRENGTH - 600 LBS. (2669 NEWTONS) WHEN TESTED ON A 1.5" MANDREL.
  3. BRACKETS [ ] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
  4. TOLERANCES:  
 .XXX = ±.010 [ .25 ]      .XX = ±.02 [ .5 ]  
 .X = ±.03 [ .8 ]      ANGLES = ±2°
  5. MATERIAL: 304 STAINLESS STEEL

FULLY ROUNDED  
EDGES ALONG  
STRAP BODY

SECTION A - A  
SCALE: 6x

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	TITLE			MATERIAL:		
							DOUBLE WRAPPED METAL LOCKING TIE HEAVY SERIES			304 STAINLESS STEEL		
							CUSTOMER DRAWING			<b>PANDUIT</b>		
							ITEM REVISION NAME					
							N41142BS/05					
							DATASET FILE NAME					
							N41142BS/05					
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [ mm ]					
							.x ± .1 [ 2.54 ]      .xxx ± .005 [ .127 ]					
							.xx ± .01 [ .25 ]      ANGLES ± 5 °					
							THIRD ANGLE PROJECTION			DRAWING NUMBER: N41142BS_DC		
05A		3/13		JAMB MIM RGR0		UPDATE DRAWING TO NEW GLOBAL PANDUIT TITLE BLOCK WITH PANDUIT LOGO		SSECN01042				
04A		2/12		MIM RGR0		NOTE #3 METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY		-----				
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1	
							JAMB	2/12	DPN	2:1	A	