


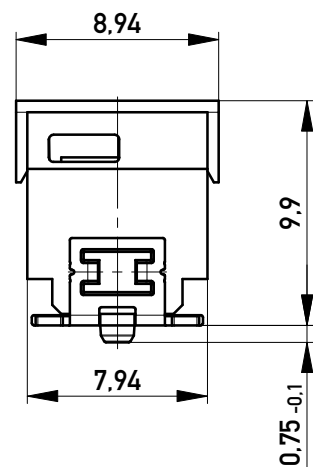
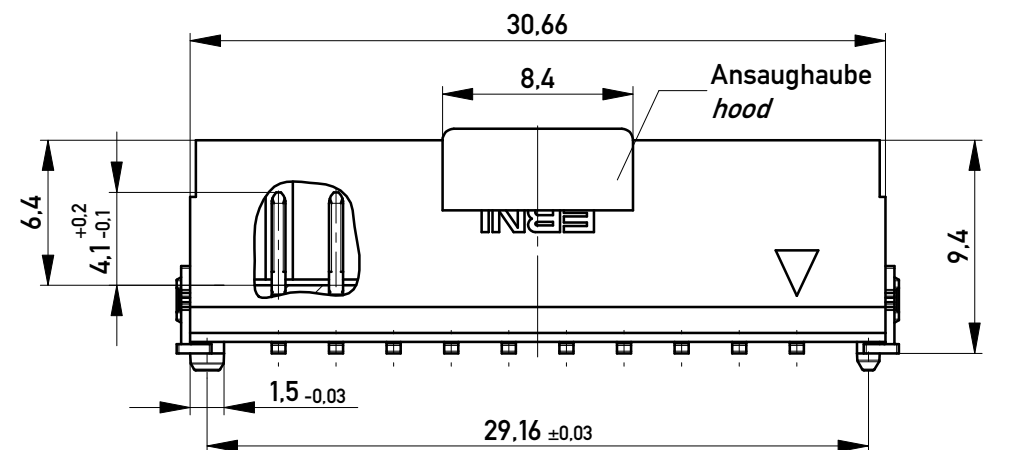


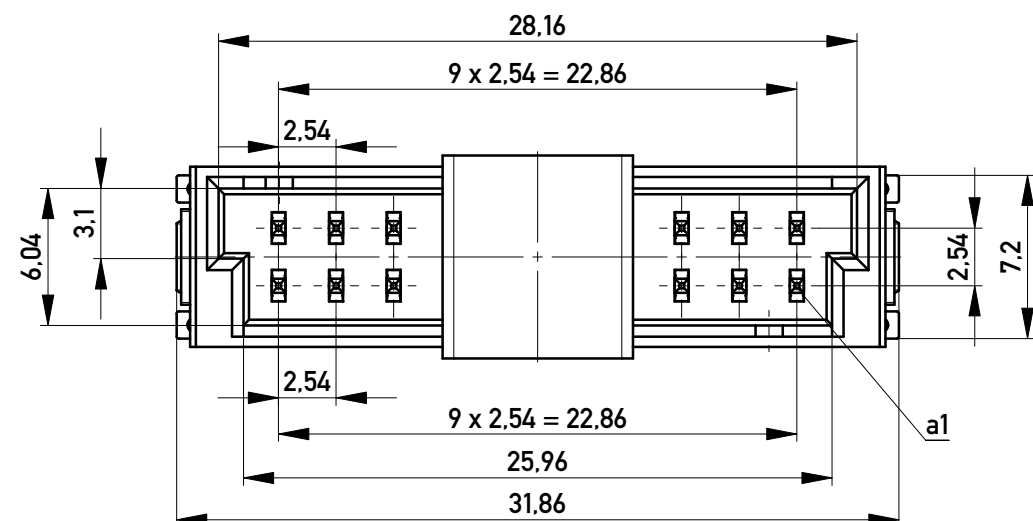

ohne Ansaughaube - *without hood*

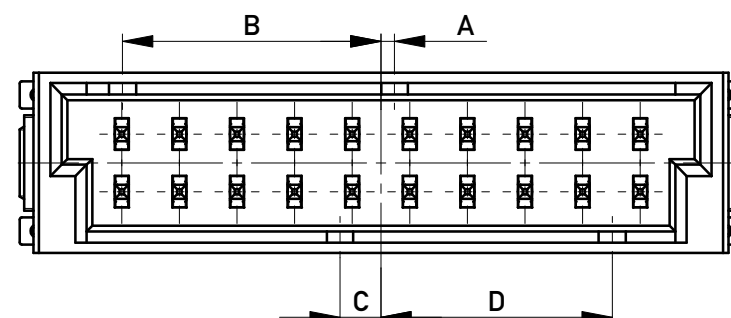

Leiterplatten-Layout Vorschlag für SMT
PCB-Layout Proposal for SMT

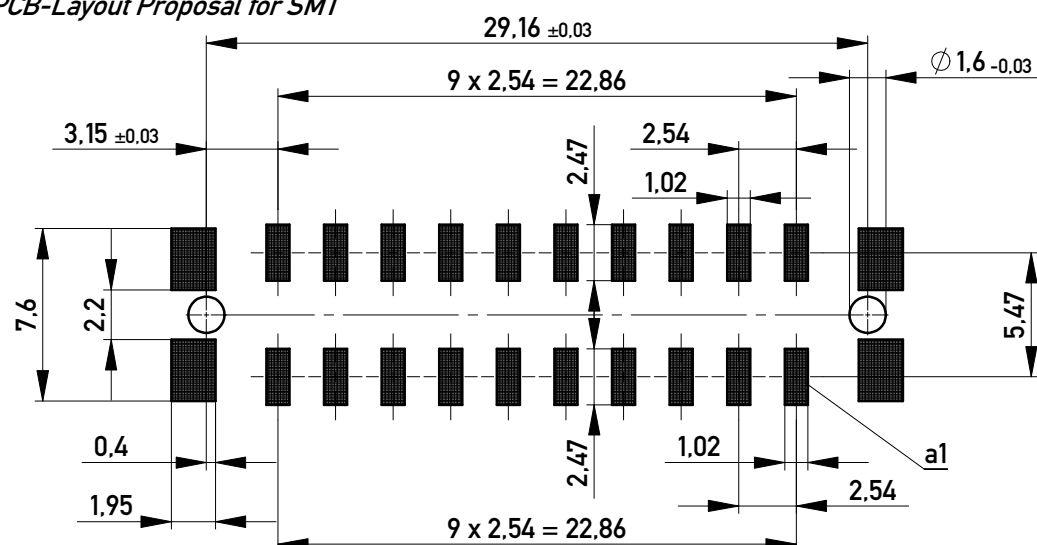


Anforderungsstufe 1
Performance Level 1

Kontaktbereich vergoldet
Mating Area gold plating


Anschlussbereich verzinnt 4-6 µm
Terminal Area 4-6 µm tin plating

Koplanarität der Anschlüsse ≤ 0,1 mm
Coplanarity Area of Termination ≤ 0,1 mm

Verpackt im Gurt in Anlehnung an DIN IEC 60286-3
Tape on Reel Packaging according to DIN IEC 60286-3
Verpackungseinheit: 320 Stück
Packaging unit: 320 pcs

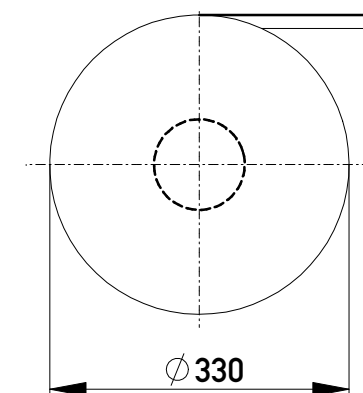

Abspulrichtung - *Reel off Direction*

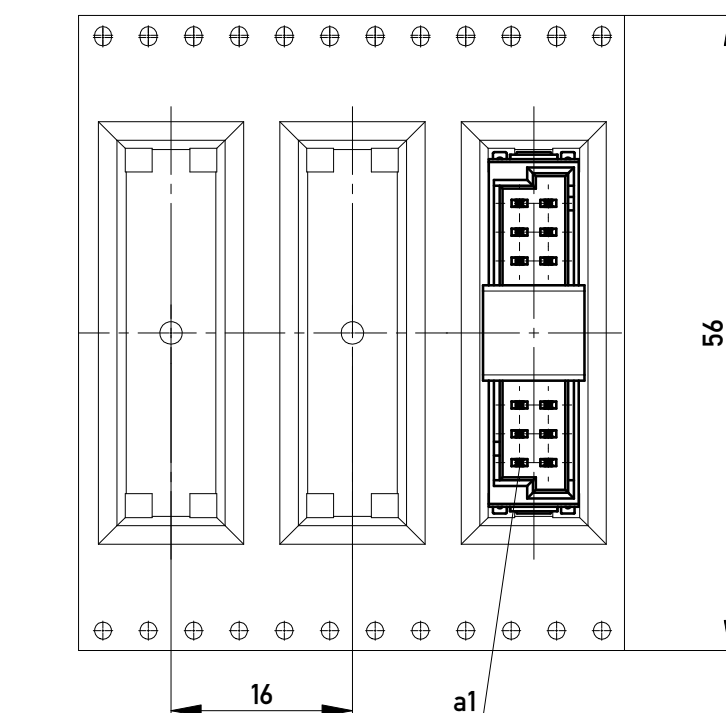


für höhere Spannungsfestigkeit
for higher voltage proof

464689		rot <i>red</i>	5.4	6.6	0.6	11.4	
464688		grün <i>green</i>	3.6	8.4	5.4	6.6	
464687		blau <i>blue</i>	1.8	10.2	3.6	8.4	
464686		schwarz <i>black</i>	0.6	11.4	1.8	10.2	
Ident-Nr. <i>part-no.</i>	Codierung <i>coding</i>	Farbe <i>color</i>	A	B	C	D	Bemerkung <i>note</i>

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed.

Proprietary notice pursuant to ISO 16046 to be observed.

Information:				Tolerances		 All Dimensions in mm		Scale 3:1			
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.				Subject to modification without prior notice. Drawing will not be updated.				Designation M 2,54 DRC-Q, 20-polig			
										www.ERNI.com	
c		21.10.2015								A3	
Index		Date						Class DRCQ			