

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/22/08	


APPROVED: _____


DATE: _____ TITLE: _____

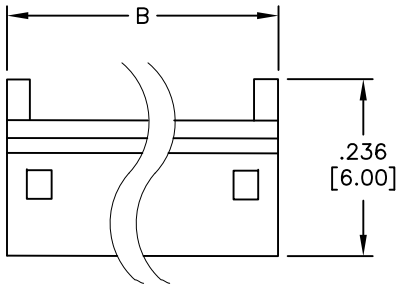

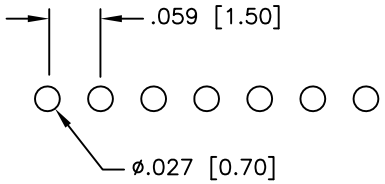

RECOMMENDED
PCB LAYOUT

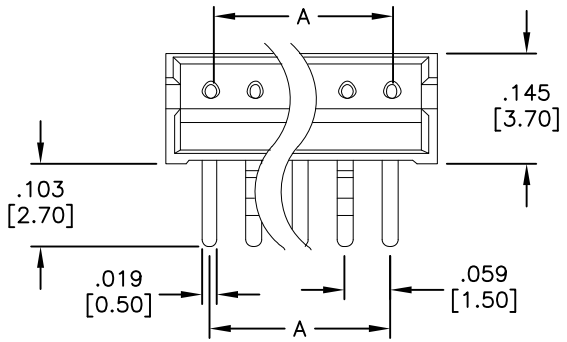

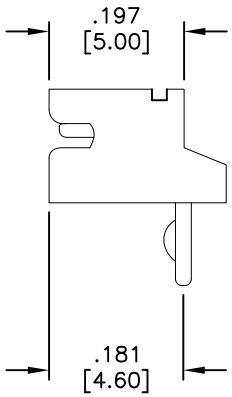

SPECIFICATIONS:

Material:
Insulator: Nylon 66, rated UL 94V–0
Insulator color: Ivory
Contacts: Brass

Plating:
Tin over Nickel underplate overall

Electrical:
Operating voltage: 100 VAC max
Current rating: 1.5 Amps max
Contact resistance: 20 mohms max
Insulation resistance: 500 Mohms min
Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:
Operating temperature: –25°C to +85°C

Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

DIMENSIONS

A = .059 [1.50] X No OF POSITIONS –1

B = .059 [1.50] X No OF POSITIONS + .059 [1.50]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	12/22/08
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .059 [1.5mm] HEADER, RIGHT ANGLE

SIZE	PART NO.	REV.
X	15SH-A-XX-TR	-

REF: | SCALE: NTS | SHEET 1 OF 1