2N5883 2N5884 PNP
2N5885 2N5886 NPN

COMPLEMENTARY SILICON POWER TRANSISTORS

TO-3 CASE

Central Semiconductor Corp.™

www.centralsemi.com

DESCRIPTION:
The CENTRAL SEMICONDUCTOR 2N5883, 2N5885 series types are complementary silicon epitaxial base transistors designed for power amplifier and switching applications.

MARKING: FULL PART NUMBER

MAXIMUM RATINGS: (T_C=25°C)	**SYMBOL**	**2N5883 / 2N5885**	**2N5884 / 2N5886**	**UNITS**
Collector-Base Voltage	V_{CBO}	60	80	V
Collector-Emitter Voltage	V_{CEO}	60	80	V
Emitter-Base Voltage	V_{EBO}	5.0		V
Continuous Collector Current	I_C	25		A
Peak Collector Current	I_{CM}	50		A
CContinuous Base Current	I_B	7.5		A
Power Dissipation	P_D	200		W
Operating and Storage Junction Temperature	T_J, T_{stg}	-65 to +200		°C
Thermal Resistance	Θ_{JC}	0.875		°C/W

ELECTRICAL CHARACTERISTICS: (T_C=25°C unless otherwise noted)

SYMBOL	**TEST CONDITIONS**	**MIN**	**MAX**	**UNITS**
I_{CBO}	V_{CB}=Rated V_{CBO}		1.0	mA
I_{CEO}	V_{CE}=½Rated V_{CEO}		2.0	mA
I_{CEX}	V_{CE}=Rated V_{CEO}, V_{BE}=1.5V		1.0	mA
I_{CEX}	V_{CE}=Rated V_{CEO}, V_{BE}=1.5V, T_C=150°C		10	mA
I_{EBO}	V_{EB}=5.0V		1.0	mA
BV_{CEO}	I_C=200mA (2N5883, 2N5885)	60		V
BV_{CEO}	I_C=200mA (2N5884, 2N5886)	80		V
$V_{CE(SAT)}$	I_C=15A, I_B=1.5A		1.0	V
$V_{CE(SAT)}$	I_C=25A, I_B=6.25A		4.0	V
$V_{BE(SAT)}$	I_C=25A, I_B=6.25A		2.5	V
$V_{BE(ON)}$	V_{CE}=4.0V, I_C=10A		1.5	V
h_{FE}	V_{CE}=4.0V, I_C=3.0A	35		
h_{FE}	V_{CE}=4.0V, I_C=10A	20	100	
h_{FE}	V_{CE}=4.0V, I_C=25A	4.0		
f_T	V_{CE}=10V, I_C=1.0A, f=1.0MHz	4.0		MHz
C_{ob}	V_{CB}=10V, I_E=0, f=1.0MHz (2N5883, 2N5885)		1000	pF
C_{ob}	V_{CB}=10V, I_E=0, f=1.0MHz (2N5884, 2N5886)		500	pF
h_{fe}	V_{CE}=4.0V, I_C=3.0A, f=1.0kHz	20		
t_r	V_{CC}=30V, I_C=10A, I_{B1}=I_{B2}=1.0A		0.7	µs
t_s	V_{CC}=30V, I_C=10A, I_{B1}=I_{B2}=1.0A		1.0	µs
t_f	V_{CC}=30V, I_C=10A, I_{B1}=I_{B2}=1.0A		0.8	µs

R1 (4-December 2012)

2N5883 2N5884 PNP
2N5885 2N5886 NPN

COMPLEMENTARY SILICON POWER TRANSISTORS

TO-3 CASE - MECHANICAL OUTLINE

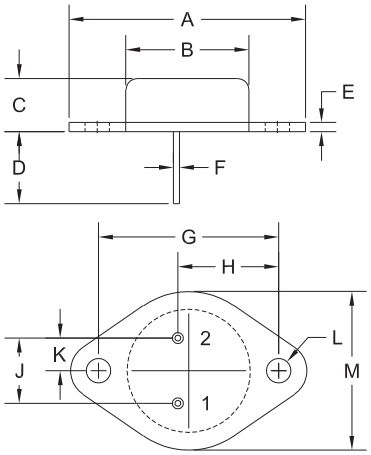

DIMENSIONS				
	INCHES		MILLIMETERS	
SYMBOL	MIN	MAX	MIN	MAX
A	1.516	1.573	38.50	39.96
B (DIA)	0.748	0.875	19.00	22.23
C	0.250	0.450	6.35	11.43
D	0.433	0.516	11.00	13.10
E	0.054	0.065	1.38	1.65
F	0.035	0.045	0.90	1.15
G	1.177	1.197	29.90	30.40
H	0.650	0.681	16.50	17.30
J	0.420	0.440	10.67	11.18
K	0.205	0.225	5.21	5.72
L (DIA)	0.151	0.172	3.84	4.36
M	0.984	1.050	25.00	26.67

TO-3 (REV: R2)

R2

LEAD CODE:
1) Base
2) Emitter
Case) Collector

MARKING:
FULL PART NUMBER

R1 (4-December 2012)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES

PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix " TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix " PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centralsemi.com

Worldwide Field Representatives:
www.centralsemi.com/wwreps

Worldwide Distributors:
www.centralsemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centralsemi.com/terms