

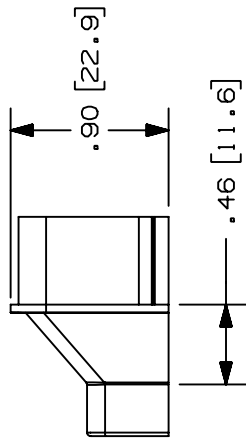
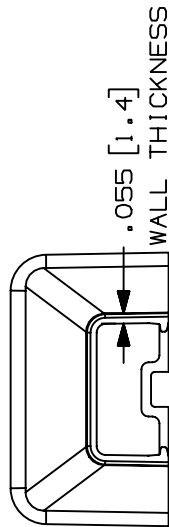


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
RFX103-X	.097 LB/10 PCS. (44.0 G/10 PCS.)

- NOTES:
- SEE CURRENT CATALOG FOR ADDITIONAL PART SUFFIXES TO INDICATE COLOR AND OR PACKAGE QUANTITY.
 - FOR USE IN POWER CABLING APPLICATIONS UP TO 600V OR FOR CATEGORY 5, FIBER OPTIC AND OTHER LOW VOLTAGE APPLICATIONS REQUIRING TAMPER-RESISTANCE.
 - REDUCER FITTING IS USED TO REDUCE PANDUIT'S LD10 PROFILE FITTINGS TO PANDUIT'S LD3 PROFILE RACEWAYS.
 - DIMENSIONS IN PARENTHESIS ARE IN METRIC.

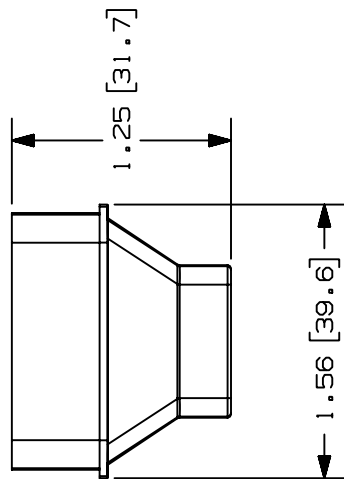

CAO FILENAME/LAYERS D35541DA_RFX103_C_00A.PRT

PANDUIT

REDUCER FITTING (RFX103-X)
CUSTOMER DRAWING

TINLEY PARK, ILLINOIS

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
(.X) ± (.XXX) ±.005(.3)
(.XX) ±.010(.8) ANGLES ±

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY RABO
DATE 07-23-97
CHK'D HIW

MAT'L: ABS/PC

SCALE FULL
DRAWING NO. 35541-69
DWG SIZE A

35541-69 HIW HIW
35541-53 HIW HIW
ECN - R CUST SUP

1 08-11-97 RABO HIW A. INCORRECT DRAWING NUMBER WAS CHANGED FROM 35541-53 TO 35541-69

R 07-23-97 RABO HIW RELEASED TO PRODUCTION

REV DATE BY CHK DESCRIPTION