
| MATERIAL NUMBER | OLD PART NUMBER | FINISHED LENGTH |
|---|---|---|
| 12000868524 | 403007K05M010 | 1M +55.6mm -0 [3.3FT. +2.2IN -0] |
| 12000868525 | 403007K05M020 | 2M +55.6mm -0 [6.6FT. +2.2IN -0] |
| 12000868526 | 403007K05M050 | 5M +55.6mm -0 [16.4FT. +2.2IN -0] |
| 12000868527 | 403007K05M100 | 10M +55.6mm -0 [32.8FT. +2.2IN -0] |



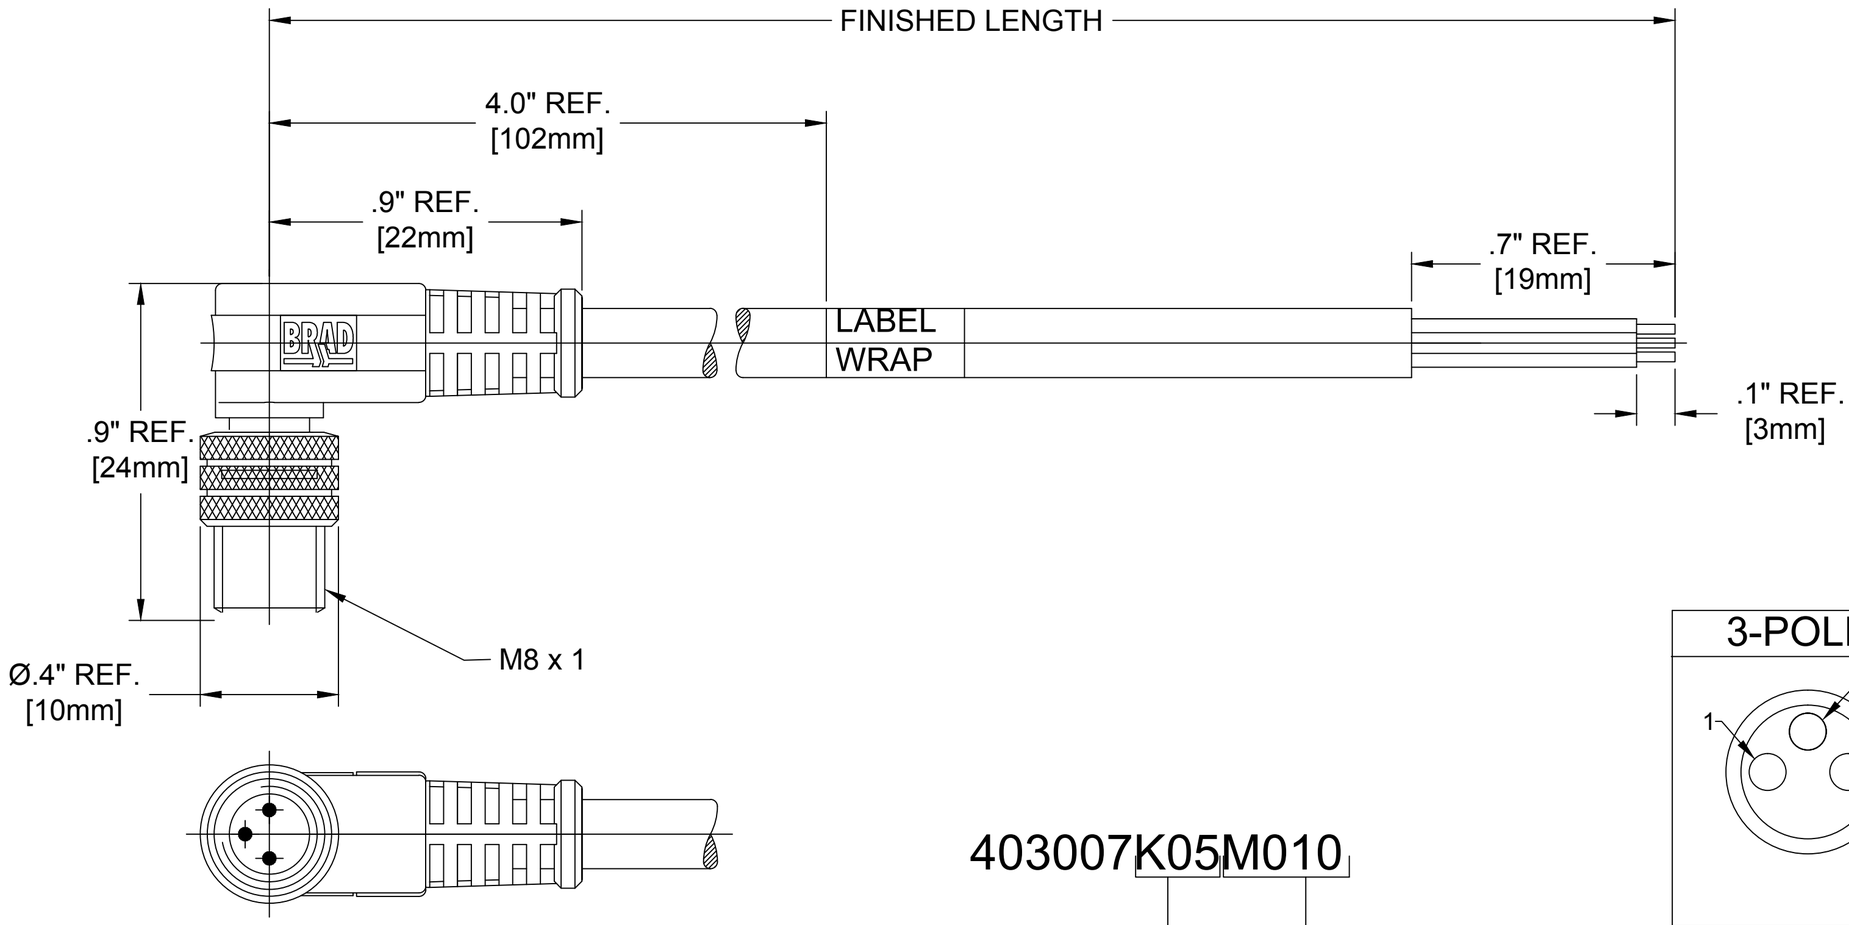


SPECIFICATION DATA

| COMPONENT | MATERIAL | FINISH |
|---|---|---|
| LABEL | MYLAR | BLACK/YELLOW |
| COUPLER | BRASS | NICKEL PLATED |
| CONTACT | COPPER ALLOY | Au OVER Ni |
| INSERT | PUR | BLACK |
| OVERMOLD | TPE | YELLOW |
| CABLE | TPE | YELLOW |
| VOLTAGE RATING: | | 60VAC/75VAC |
| AMPERAGE RATING: | | 4A |
| PROTECTION CLASS: | | IP 67 |
| OPERATING TEMPERATURE: | | -20°C / 80°C |
| UL CERTIFICATION: | | FILE NO. E152210 |
| CSA CERTIFICATIONS: | | FILE NO. LR6837 |

403007K05M010

cable type
#22/3C AWG
TPE YELLOW

cable length
010----1 Meter
100----10 Meters

3-POLE




1 BROWN
3 BLUE
4 BLACK

RELEASE
EC NO: IPG2014-0657
DRWN: GGUSTAFS 2013/10/09
CH'KD: TWOLDEGE ---
APPR: BWOODMAN2013/11/20
DESCRIPTION
A
REV

QUALITY SYMBOL
▼=0
C=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

| | mm | INCH |
|---|---|---|
| 4 PLACES | ±--- | ±--- |
| 3 PLACES | ±--- | ±.005 |
| 2 PLACES | ±0.25 | ±.010 |
| 1 PLACE | ±0.13 | ±.020 |
| ANGULAR ±.5° | | |

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: IN/MM
SCALE: NTS
DESIGN UNITS: INCH
THIRD ANGLE PROJECTION

DRAWN BY GGUSTAFS DATE 2013/10/09
CHECKED BY TWOLDEGE DATE 2013/11/20
APPROVED BY BWOODMAN DATE 2013/11/20

TITLE
NANO CHANGE
3 POLE MALE 90D
22/3C AWG YELLOW TPE

MOLEX INCORPORATED

MATERIAL NO. SEE CHART
DOCUMENT NO. SD-120086-042
SHEET NO. 1 0F 1
SIZE C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION