


Material	High Conductivity Seamless Copper Tube
Plating	Electro-Tin
Wire Size	2 AWG
Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric
Wire Strip Length	1-1/4 in.
Stud Size	1/4 in.
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
UL Temperature Rating	90° C
C.S.A Certified Wire Connector	Yes
Panduit Color Code on Barrel	BROWN
Panduit Die Index No. on Barrel	P33
Alternate Industry Die Index No. () on Barrel	(10)



Technical drawing of a Panduit N40 2 STR CU LOC2-14BW cable connector. The drawing shows a side view of the connector with various dimensions and labels. Key features include:

- .38 R Ref**: Radius dimension at the top of the connector.
- Color coded barrel markings**: Markings on the right side of the connector.
- .60±.04**: Dimension for the main body of the connector.
- .25±.04**: Dimension for the mounting tab.
- .75±.02**: Dimension for the mounting hole.
- .27±.02 DIA (2) PLS**: Dimension for the mounting holes.
- 2.79±.06**: Total length dimension.
- PANDUIT**: Brand name on the barrel.
- N40 2 STR CU LOC2-14BW**: Product specifications on the barrel.

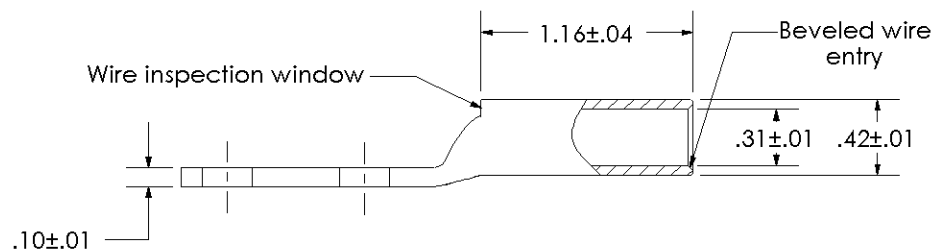

						 PANDUIT CORP. TINLEY PARK, ILLINOIS	
						LCC2-14BW-Q Copper Lug - Two-Hole, Long Barrel with Window	
00	9/02	SAB	DRL	RELEASED	10340		
REV	DATE	BY	CHK	DESCRIPTION	ECN	SCALE N/A	DRAWING NO / CAD FILE LCC2-14BW-CUST