

6

5


4

3

2

1

FACE VIEW-FEMALE INSERT



1 GREEN
2 BLACK
3 WHITE

MATERIAL P/N #

ENGINEERING P/N

FINISHED LENGTH

1300062113

50919

10' +6.5"-0 (3.0M +165.1mm-0)

1300062101

40943

12' +6.5"-0 (3.7M +165.1mm-0)

1300180192

61902


18' +12.5"-0 (5.5M +317.5mm-0)

1300062114


50972

30' +24.5"-0 (9.1M +622.3mm-0)

2.45" REF.
[62.3mm]

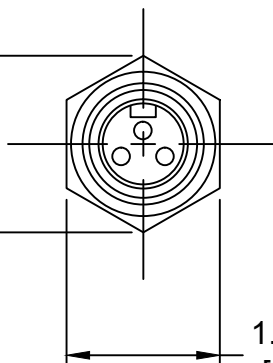

1.06" REF.
[26.9mm]

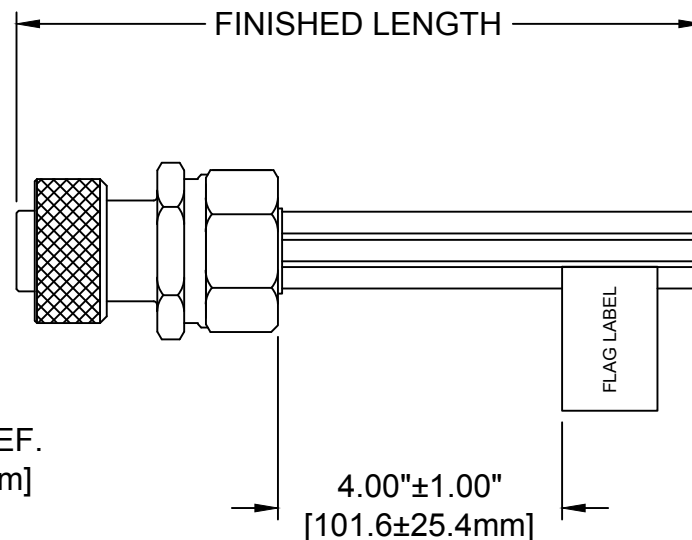**SPECIFICATIONS:****MINI-CHANGE RECEPTACLE:**

RECEPTACLE SHELL: ZINC PLATED STEEL
CONTACT: GOLD/NICKEL OVER COPPER ALLOY
INSERT: YELLOW PVC
CLAMP NUT: ZINC PLATED STEEL
PLASTIC FERRULE: WHITE NYLON
METAL FERRULE: ZINC PLATED STEEL
LABEL: YELLOW VINYL

WIRE: #16/1 THERMOPLASTIC 1015/TEW WIRE
WIRE MARKING: STYLE 1015, MTW AND CSA
TEW, 16AWG, 600V AND 105°C
ASSEMBLY RATINGS: 600V Max., 13A Max.
PROTECTION CLASS: IP67

INITIAL RELEASE EC NO: IPG2014-1419 DRWN: BARDEN 2014/02/07 CHKD: TWOLDEGE APPR: BWOODMAN 2014/02/11	DESCRIPTION	QUALITY SYMBOLS ▽=0 ◁=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION ⊙ □		
				mm	INCH	DRAWN BY BARDEN	DATE 2014/02/07	TITLE MC 3P FP LIQUID TIGHT 16AWG PVC				
			4 PLACES	±---	±---	CHECKED BY TWOLDEGE	DATE 2014/02/11					
			3 PLACES	±---	±.005	MOLEX INCORPORATED						
			2 PLACES	±0.13	±.020						APPROVED BY BWOODMAN	DATE 2014/02/11
			1 PLACE	±0.25	±.010	SD-130062-018						
			ANGULAR ±1/2°								DOCUMENT NO.	
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			MATERIAL NO. SEE CHART		MOLEX		MOLEX INCORPORATED		
						SIZE A		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

6

5

4

3

2

1