

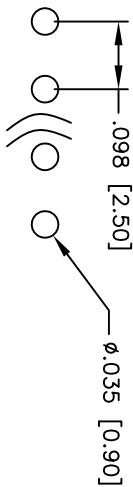
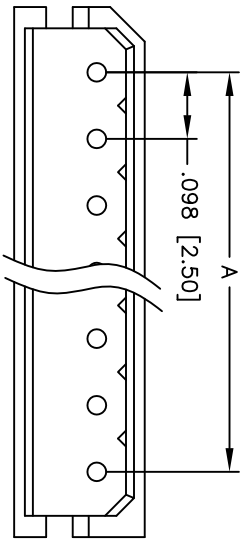


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/10/09	
A		REVISED DIM.	7/07/10	
B		REVISED SPEC.	05/15/12	

APPROVED: _____
DATE: _____ TITLE: _____

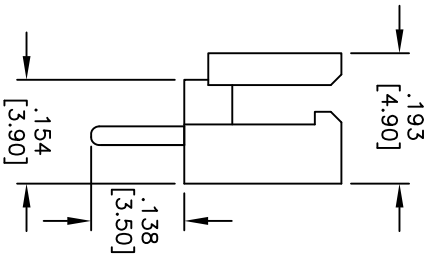

Recommended PCB Layout

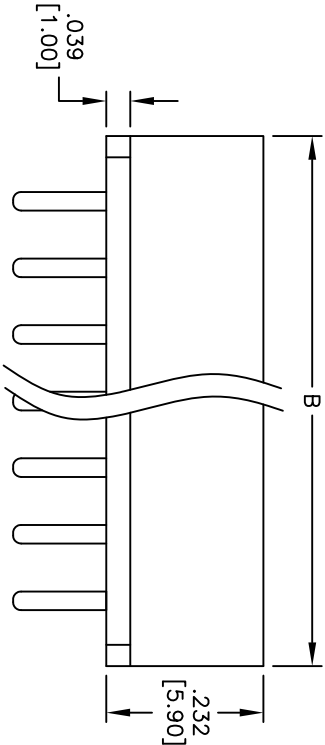

SPECIFICATIONS:

Material:

Insulator: Nylon66, rated UL 94V-0

Insulator color: Beige

Contacts: Brass

Plating:

Tin over copper underplate overall.

Electrical:

Operating voltage: 250 VAC max

Current rating: 3 Amps max

Contact resistance: 20 mohms max

Dielectric withstanding voltage: 1000 VAC for 1 minute

Mechanical:

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant

Positions: 02 thru 20
A = .098 [2.50] x No. of Spaces
B = .098 [2.50] x No. of Spaces + .197 [5.00]

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

.098 [2.50] PITCH WAFER, STRAIGHT PCB

LOW PROFILE

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES				ADAM TECH			
HOLES				909 Rahway Avenue, Union, NJ 07083			
.X	± .10	Ø.X	± .10	Phone: 908-687-5000 Fax: 908-687-5710			
.XX	± .020	Ø.XX	± .015				
.XXX	± .015	Ø.XXX	± .010				
APPROVALS			DATE	TITLE			
DRAWN	DY	1/10/09		.098 [2.50] PITCH WAFER, STRAIGHT PCB			
CHECKED				LOW PROFILE			
APPROVED				SIZE	PART NO.	REV.	
				X	25SH-E-XX-TS	B	
REF:	S00123T	SCALE:	MIS	SHEET	1 OF 1		

ROHS
COMPLIANT