

MODEL: CEP-1153 | **DESCRIPTION:** PIEZO BUZZER TRANSDUCER**FEATURES**

- piezo transducer
- 30 Vp-p operating voltage
- wide operating temperature range


**SPECIFICATIONS**

| parameter | conditions/description | min | typ | max | units |
|------------------------|---|-------|--------|--------|-------|
| operating voltage | | | | 30 | Vp-p |
| current consumption | at 10 Vp-p, 4,000 Hz square wave | | | 7 | mA |
| rated frequency | | | 4,000 | | Hz |
| sound pressure level | at 10 cm, 10 Vp-p, 4,000 Hz square wave | 82 | | | dB |
| electrostatic capacity | at 1 kHz/1 V | 9,800 | 14,000 | 18,200 | pF |
| dimensions | Ø17.0 x 7.6 | | | | mm |
| weight | | | | 3.4 | g |
| material | PBT+15% GF (black) | | | | |
| terminal | pin type (Au plating) | | | | |
| operating temperature | | -30 | | 105 | °C |
| storage temperature | | -40 | | 105 | °C |
| RoHS | yes | | | | |

Notes: 1. All specifications measured at 5~35°C, humidity at 45~85%, under 86~106kPa pressure, unless otherwise noted.


SOLDERABILITY

| parameter | conditions/description | min | typ | max | units |
|----------------|-------------------------|-----|-----|-----|-------|
| hand soldering | for maximum 2 seconds | 330 | | 380 | °C |
| wave soldering | see wave solder profile | 255 | 260 | 265 | °C |

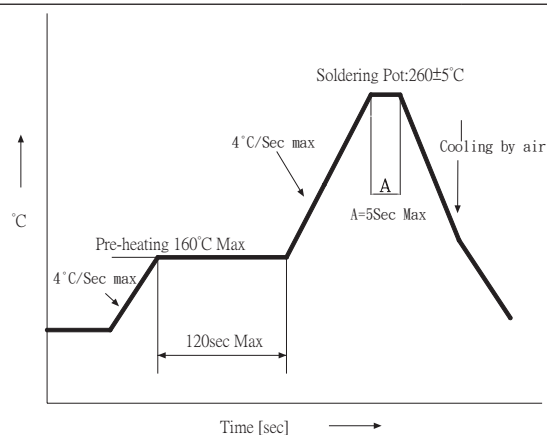


MECHANICAL DRAWING

units: mm
tolerance: ± 0.5 mm

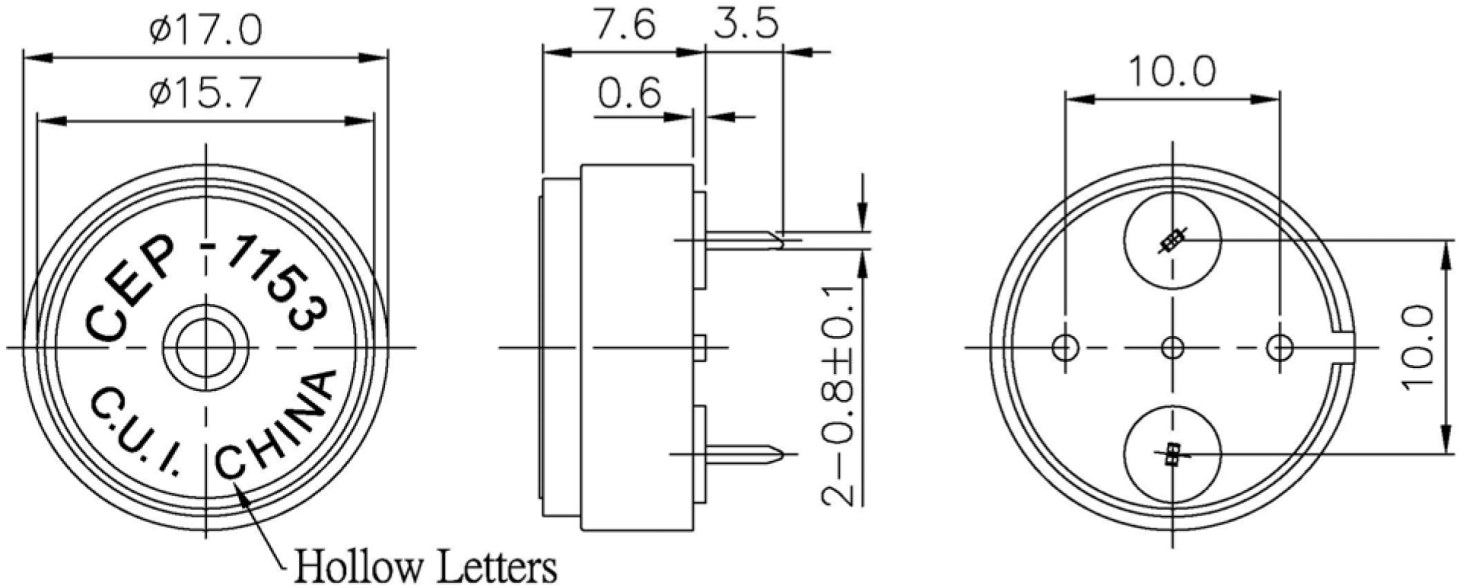

FREQUENCY RESPONSE CURVE

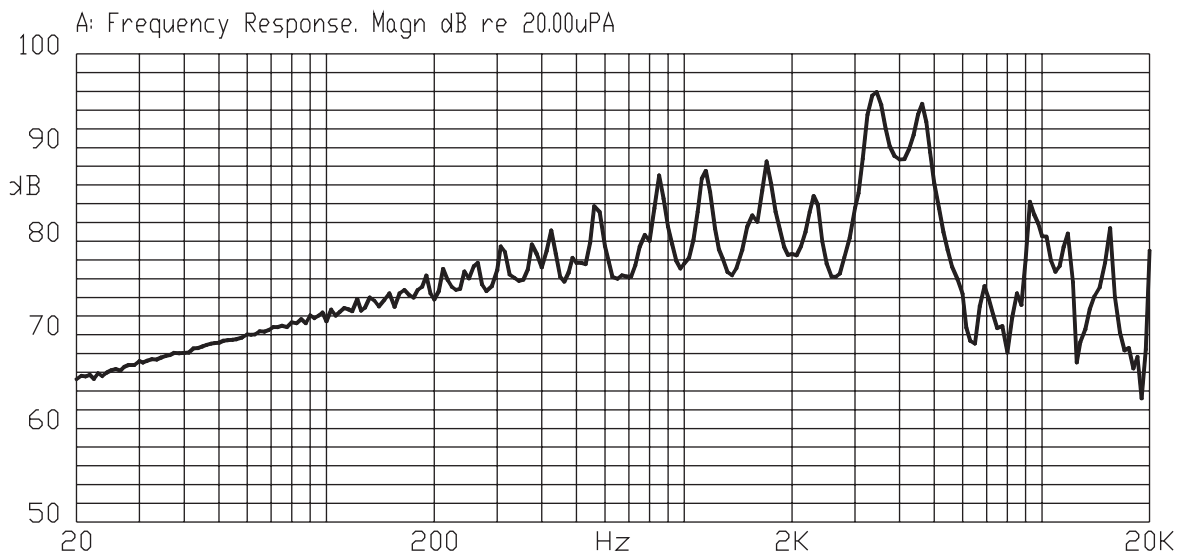

PACKAGING



units: mm

Inner Carton Size: 310 x 248 x 49 mm

Carton Size: 550 x 330 x 290 mm

Inner Carton QTY: 780 pcs per reel

Carton QTY: 7,800 pcs per carton

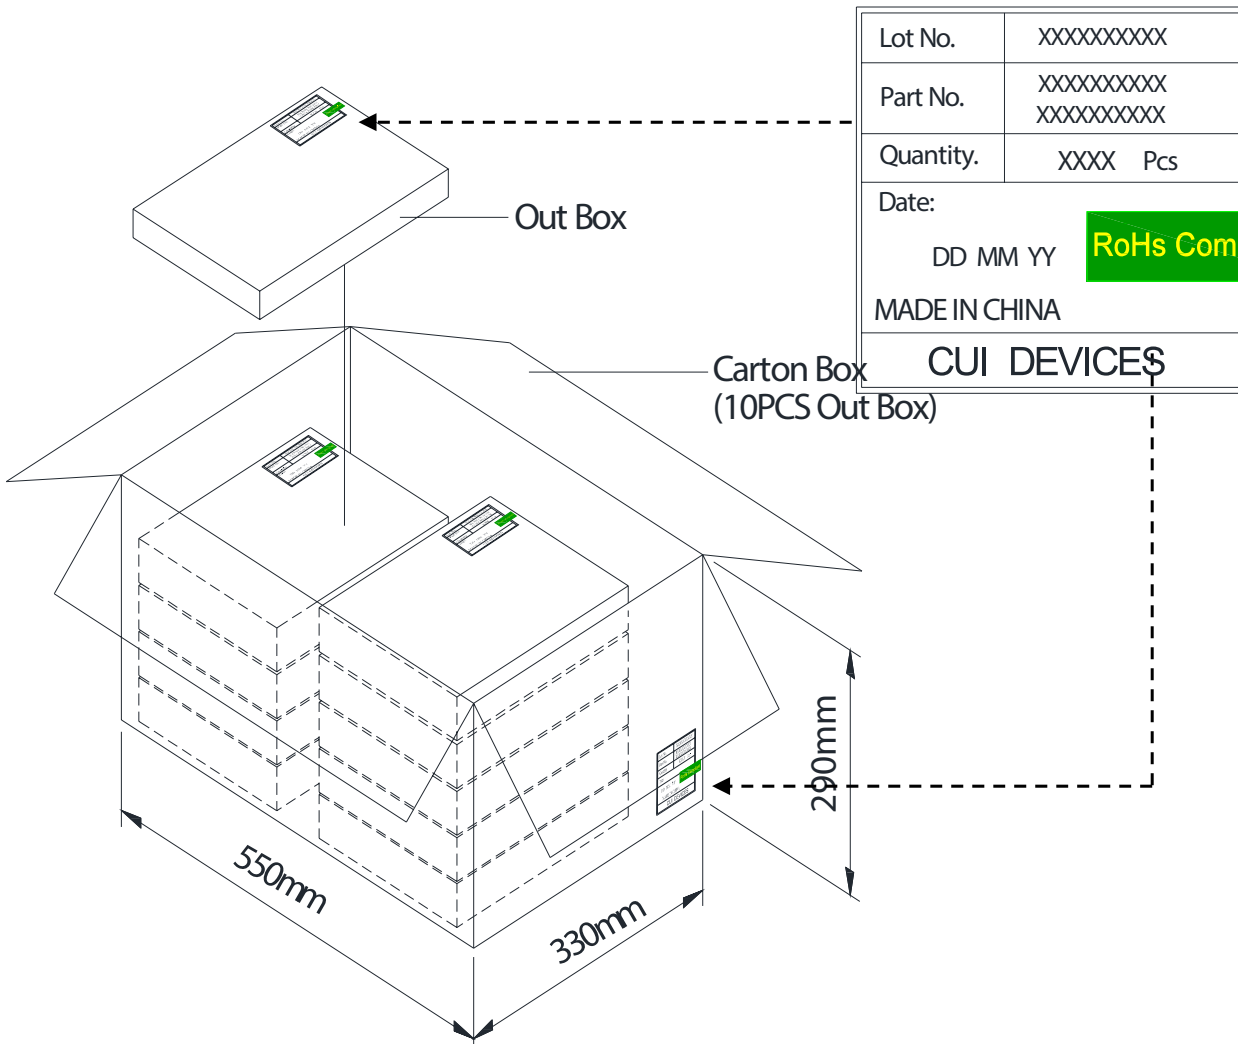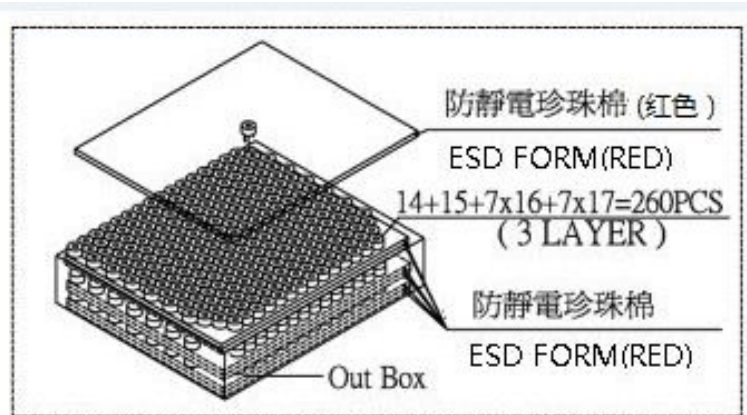

REVISION HISTORY

| rev. | description | date |
|------|--|------------|
| 1.0 | initial release | 05/11/2006 |
| 1.01 | housing appearance modified, applied new spec template | 05/15/2015 |
| 1.02 | changed to ESD packaging | 08/30/2019 |
| 1.03 | brand update | 04/22/2020 |

The revision history provided is for informational purposes only and is believed to be accurate.

CUI DEVICES

CUI Devices offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI Devices reserves the right to make changes to the product at any time without notice. Information provided by CUI Devices is believed to be accurate and reliable. However, no responsibility is assumed by CUI Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI Devices products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.