DirectFET® Dual N-Channel Power MOSFET ②

Applications

- Charge and Discharge Switch for Battery Application
- Isolation Switch for Input Power or Battery Application


Features and Benefits

- Environmentaly Friendly Product
- RoHs Compliant, Halogen Free
- Dual Common-Drain N-Channel MOSFETs Provides High Level of Integration and Very Low RDS(on)

Typical values (unless otherwise specified)

V_{DSS}	V_{GS}	$R_{DS(on)}$	$R_{DS(on)}$
20V max	±12V max	3.8mΩ@4.5V	5.4mΩ@2.5V

$Q_{g\ tot}$	Q_{gd}	Q_{gs2}	Q_{rr}	Q_{oss}	$V_{gs(th)}$
27nC	9.5nC	1.4nC	21nC	15nC	0.80V



SA


DirectFET®ISOMETRIC

Applicable DirectFET Outline and Substrate Outline (see p.7,8 for details)①

SQ	SX	ST	**SA**	MQ	MX	MT	MP	MC		

Description

The IRL6297SDPbF combines the latest HEXFET® N-Channel Power MOSFET Silicon technology with the advanced DirectFET® packaging to achieve the lowest on-state resistance in a package that has the footprint smaller than an SO-8 and only 0.6 mm profile. The DirectFET® package is compatible with existing layout geometries used in power applications, PCB assembly equipment and vapor phase, infra-red or convection soldering techniques, when application note AN-1035 is followed regarding the manufacturing methods and processes. The DirectFET® package allows dual sided cooling to maximize thermal transfer in power systems, improving previous best thermal resistance by 80%.

Base Part Number	Package Type	Standard Pack		Orderable part number
		Form	Quantity	
IRL6297SDPbF	DirectFET Small Can	Tape and Reel	4800	IRL6297SDTRPbF

Absolute Maximum Ratings

	Parameter	Max.	Units
V_{DS}	Drain-to-Source Voltage	20	V
V_{GS}	Gate-to-Source Voltage	±12	
I_D @ T_A = 25°C	Continuous Drain Current, V_{GS} @ 10V ③	15	A
I_D @ T_A = 70°C	Continuous Drain Current, V_{GS} @ 10V ③	12	
I_D @ T_C = 25°C	Continuous Drain Current, V_{GS} @ 10V ④	58	
I_{DM}	Pulsed Drain Current ⑤	140	

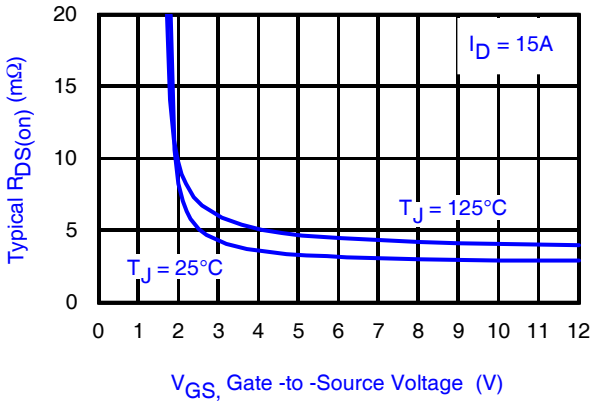


Fig 1. Typical On-Resistance vs. Gate Voltage

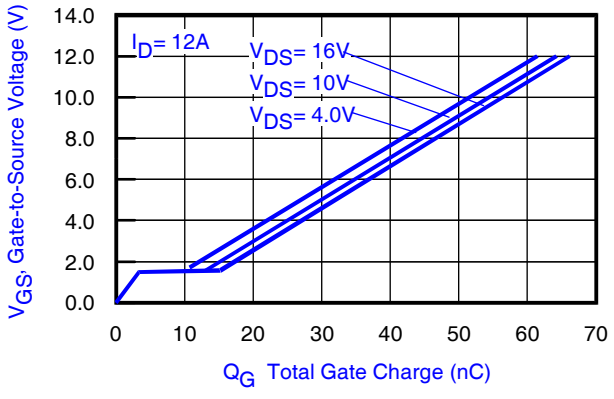


Fig 2. Typical Total Gate Charge vs Gate-to-Source Voltage

Notes:

① Click on this section to link to the appropriate technical paper.

② Click on this section to link to the DirectFET Website.

③ Surface mounted on 1 in. square Cu board, steady state.

④ T_C measured with thermocouple mounted to top (Drain) of part.

⑤ Repetitive rating; pulse width limited by max. junction temperature.

 © 2013 International Rectifier

Static @ T_J = 25°C (unless otherwise specified)

	Parameter	Min.	Typ.	Max.	Units	Conditions
BV_{DSS}	Drain-to-Source Breakdown Voltage	20	–––	–––	V	V_{GS} = 0V, I_D = 250µA
$\Delta BV_{DSS}/\Delta T_J$	Breakdown Voltage Temp. Coefficient	–––	6.1	–––	mV/°C	Reference to 25°C, I_D = 1.0mA
$R_{DS(on)}$	Static Drain-to-Source On-Resistance	–––	3.8	4.9	mΩ	V_{GS} = 4.5V, I_D = 15A ⑥
		–––	5.4	6.9		V_{GS} = 2.5V, I_D = 12A ⑥
$V_{GS(th)}$	Gate Threshold Voltage	0.50	0.80	1.10	V	V_{DS} = V_{GS}, I_D = 35µA
$\Delta V_{GS(th)}/\Delta T_J$	Gate Threshold Voltage Coefficient	–––	-4.1	–––	mV/°C	
I_{DSS}	Drain-to-Source Leakage Current	–––	–––	1.0	µA	V_{DS} = 16V, V_{GS} = 0V
		–––	–––	150		V_{DS} = 16V, V_{GS} = 0V, T_J = 150°C
I_{GSS}	Gate-to-Source Forward Leakage	–––	–––	100	nA	V_{GS} = 12V
	Gate-to-Source Reverse Leakage	–––	–––	-100		V_{GS} = -12V
gfs	Forward Transconductance	60	–––	–––	S	V_{DS} = 10V, I_D =12A
Q_g	Total Gate Charge	–––	54	–––	nC	V_{DS} = 10V, V_{GS} = 10V, I_D = 12A
Q_g	Total Gate Charge	–––	27	–––		V_{DS} = 10V V_{GS} = 4.5V I_D = 12A See Fig.15
Q_{gs1}	Pre- Vth Gate-to-Source Charge	–––	2.2	–––		
Q_{gs2}	Post -Vth Gate-to-Source Charge	–––	1.4	–––		
Q_{gd}	Gate-to-Drain Charge	–––	9.5	–––		
Q_{godr}	Gate Charge Overdrive	–––	13.9	–––		
Q_{sw}	Switch charge (Q_{gs2} + Q_{gd})	–––	10.9	–––		
Q_{oss}	Output Charge	–––	15	–––	nC	V_{DS} = 16 V, V_{GS} = 0V
R_G	Gate Resistance	–––	1.8	–––	Ω	
$t_{d(on)}$	Turn-On Delay Time	–––	8.8	–––	ns	V_{DD} = 10V, V_{GS} = 4.5V ⑥
t_r	Rise Time	–––	29	–––		I_D = 12A
$t_{d(off)}$	Turn-Off Delay Time	–––	41	–––		R_G = 2.0 Ω
t_f	Fall Time	–––	41	–––		See Fig.17
C_{iss}	Input Capacitance	–––	2245	–––	pF	V_{GS} = 0V
C_{oss}	Output Capacitance	–––	610	–––		V_{DS} = 10V
C_{rss}	Reverse Transfer Capacitance	–––	395	–––		ƒ = 1.0MHz

Diode Characteristics

	Parameter	Min.	Typ.	Max.	Units	Conditions
I_S	Continuous Source Current (Body Diode)	–––	–––	25	A	MOSFET symbol showing the integral reverse p-n junction diode.
I_{SM}	Pulsed Source Current (Body Diode) ⑤	–––	–––	140		
V_{SD}	Diode Forward Voltage	–––	–––	1.2	V	T_J = 25°C, I_S = 12A, V_{GS} = 0V ⑥
t_{rr}	Reverse Recovery Time	–––	28	42	ns	T_J = 25°C, I_F = 12A, V_{DD} = 10V
Q_{rr}	Reverse Recovery Charge	–––	21	32	nC	di/dt = 100 A/µs ⑥

Notes:

⑥ Pulse width ≤ 400µs; duty cycle ≤ 2%.

 © 2013 International Rectifier

Absolute Maximum Ratings

	Parameter	Max.	Units
P_D @T_A = 25°C	Power Dissipation ③	1.7	W
P_D @T_A = 70°C	Power Dissipation ③	1.1	
P_D @T_C = 25°C	Power Dissipation ④	25	
T_P	Peak Soldering Temperature	270	°C
T_J	Operating Junction and	-40 to + 150	
T_{STG}	Storage Temperature Range		

Thermal Resistance

	Parameter	Typ.	Max.	Units
$R_{\theta JA}$	Junction-to-Ambient ③	—	72	°C/W
$R_{\theta JA}$	Junction-to-Ambient ⑦	12.5	—	
$R_{\theta JA}$	Junction-to-Ambient ⑧	20	—	
$R_{\theta JC}$	Junction-to-Case ④,⑨	—	5.1	
$R_{\theta J\text{-}PCB}$	Junction-to-PCB Mounted	1.0	—	
	Linear Derating Factor ③	0.014		W/°C

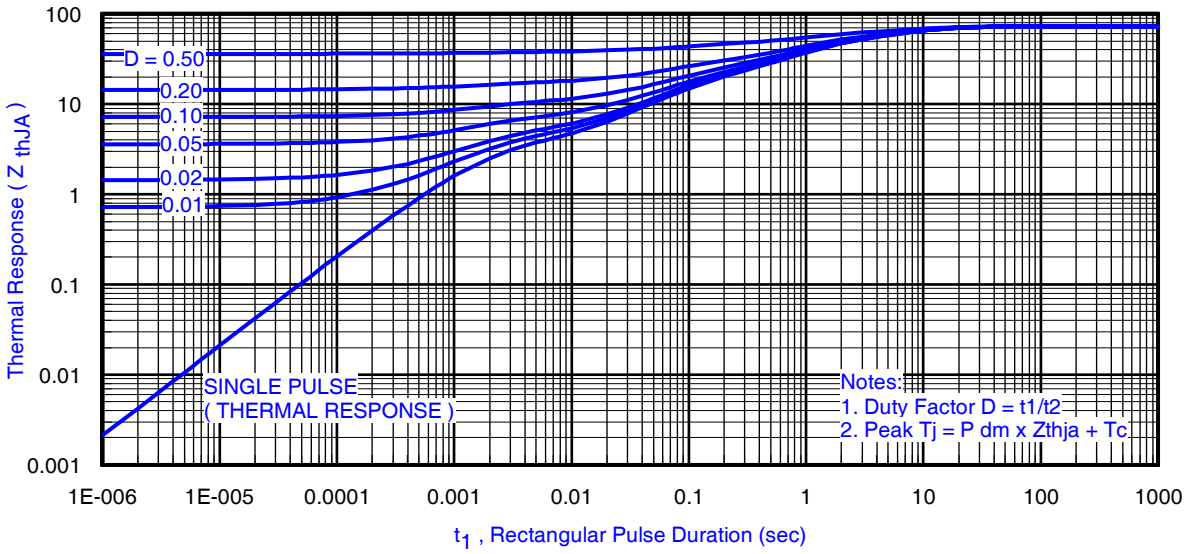



Fig 3. Maximum Effective Transient Thermal Impedance, Junction-to-Ambient ①

Notes:

⑦ Used double sided cooling, mounting pad with large heatsink.

⑧ Mounted on minimum footprint full size board with metalized back and with small clip heatsink.

⑨ R_θ is measured at T_J of approximately 90°C.

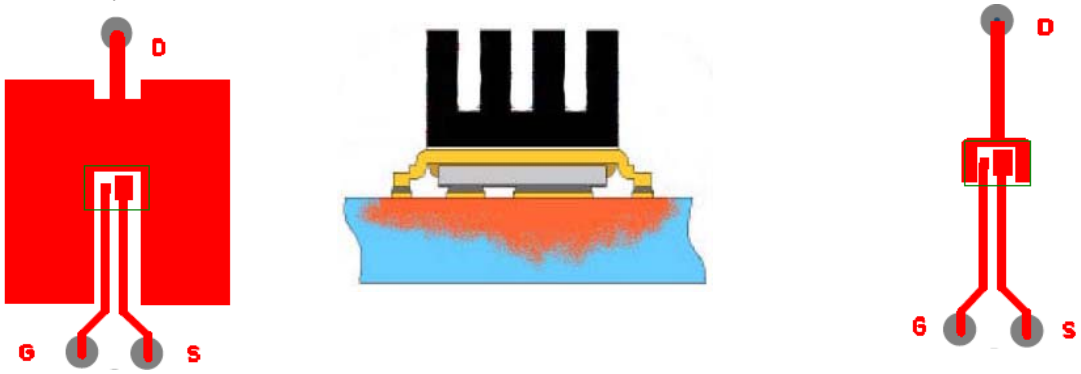

③ Surface mounted on 1 in. square Cu board (still air).

⑨ Mounted to a PCB with small clip heatsink (still air)

⑨ Mounted on minimum footprint full size board with metalized back and with small clip heatsink (still air)

 © 2013 International Rectifier

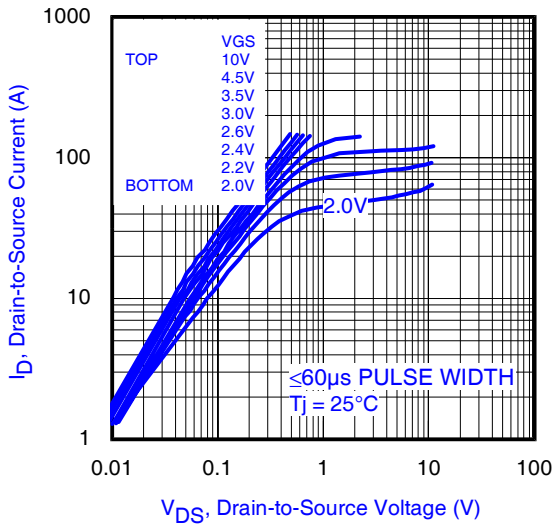


Fig 4. Typical Output Characteristics

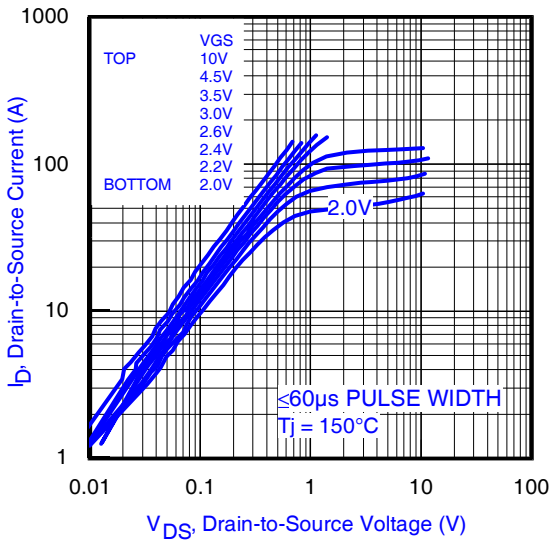


Fig 5. Typical Output Characteristics

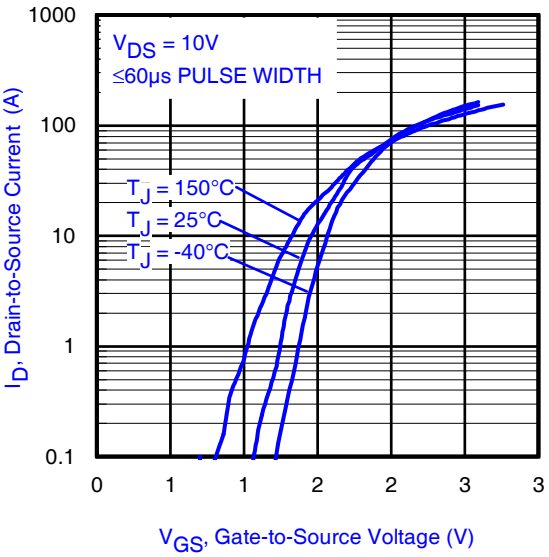


Fig 6. Typical Transfer Characteristics

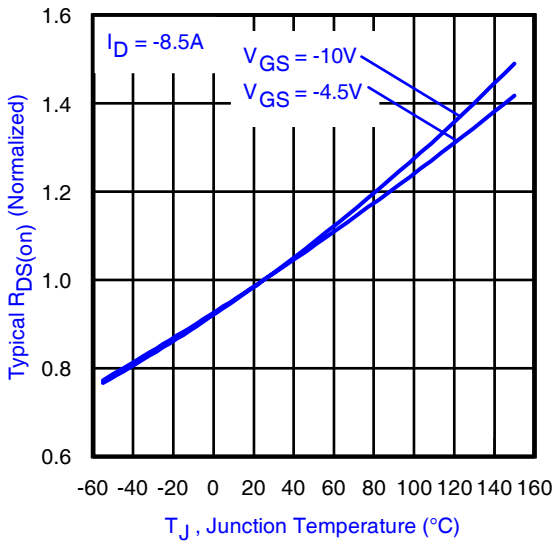


Fig 7. Normalized On-Resistance vs. Temperature

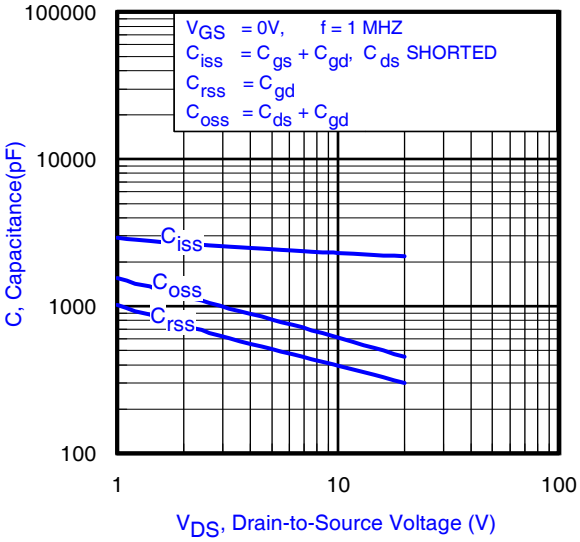


Fig 8. Typical Capacitance vs.Drain-to-Source Voltage

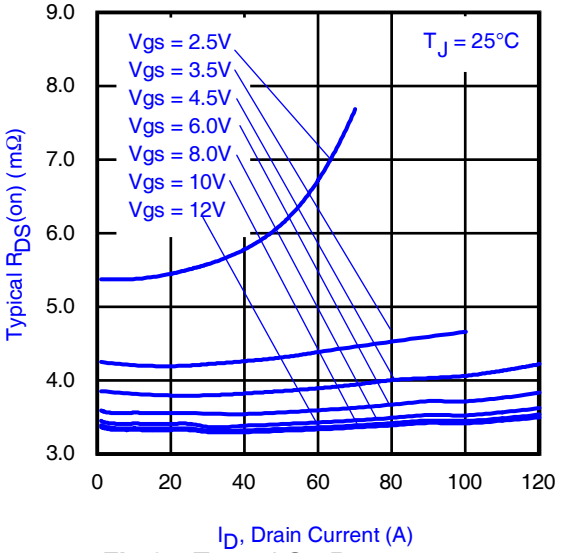


Fig 9. Typical On-Resistance vs. Drain Current and Gate Voltage

 © 2013 International Rectifier

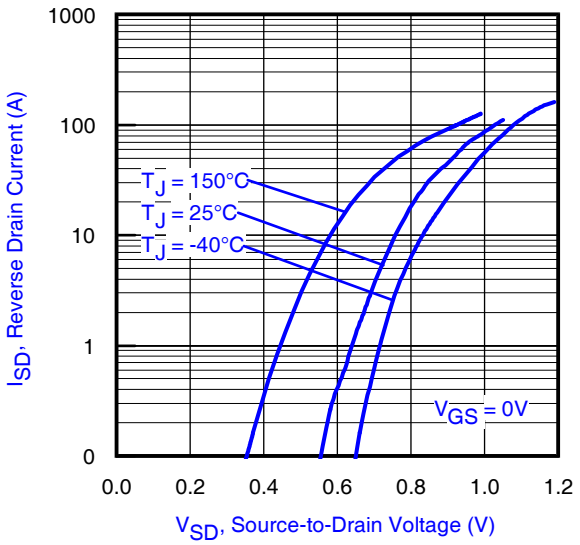


Fig 10. Typical Source-Drain Diode Forward Voltage

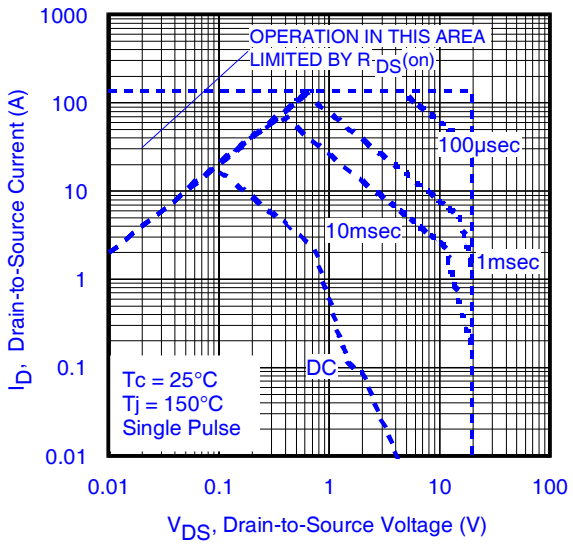


Fig 11. Maximum Safe Operating Area

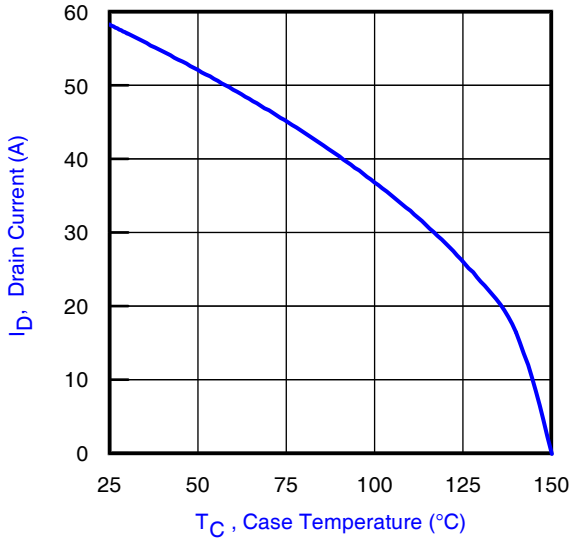


Fig 12. Maximum Drain Current vs. Case Temperature

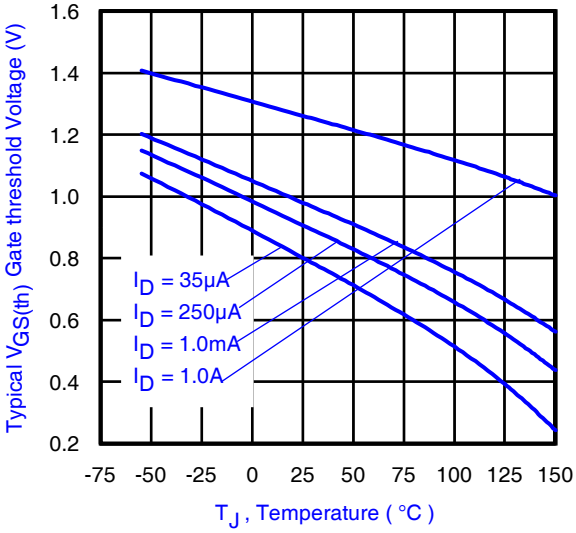


Fig 13. Typical Threshold Voltage vs. Junction Temperature

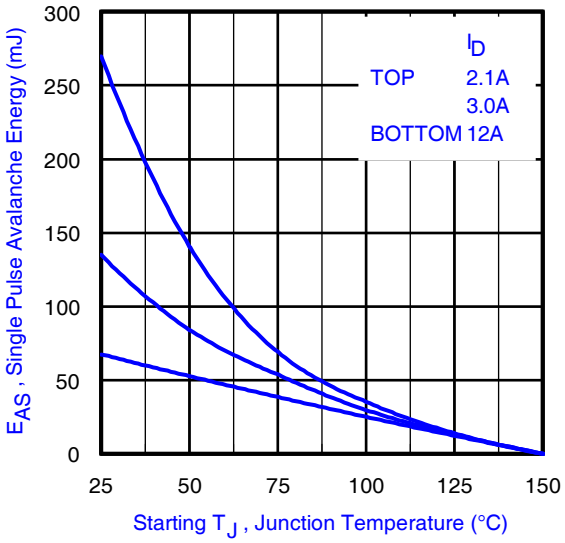


Fig 14. Maximum Avalanche Energy vs. Drain Current

 © 2013 International Rectifier

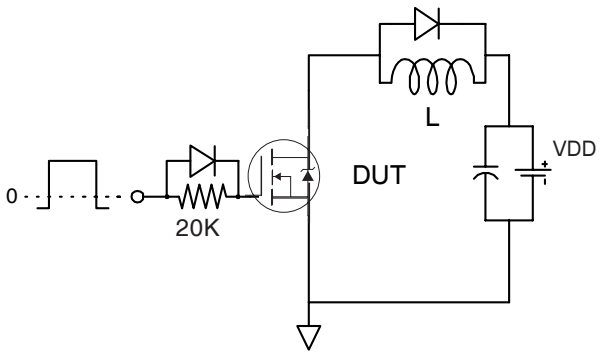


Fig 15a. Gate Charge Test Circuit

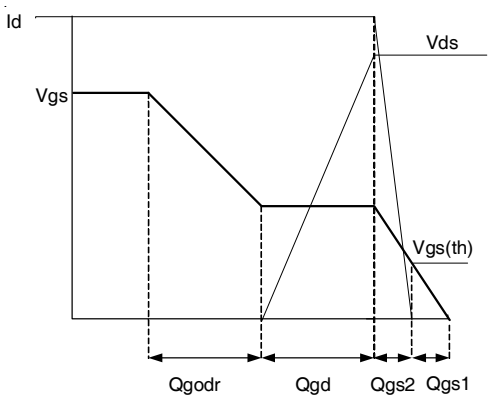


Fig 15b. Gate Charge Waveform

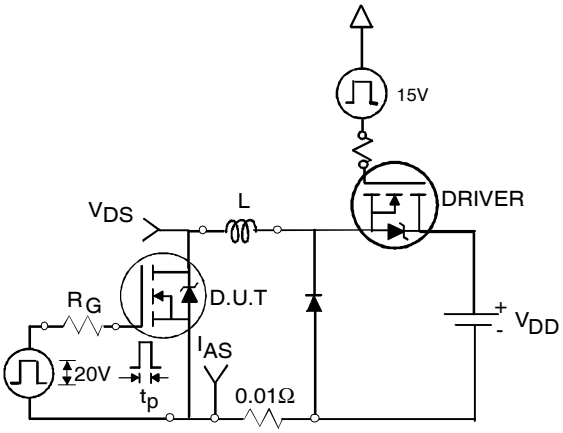


Fig 16a. Unclamped Inductive Test Circuit

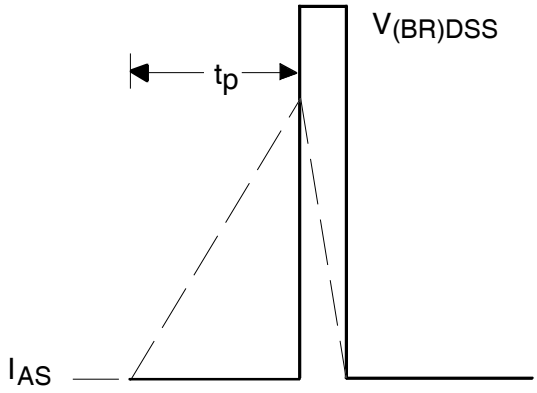


Fig 16b. Unclamped Inductive Waveforms

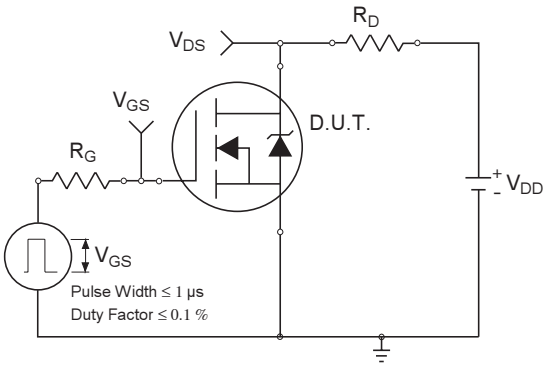


Fig 17a. Switching Time Test Circuit

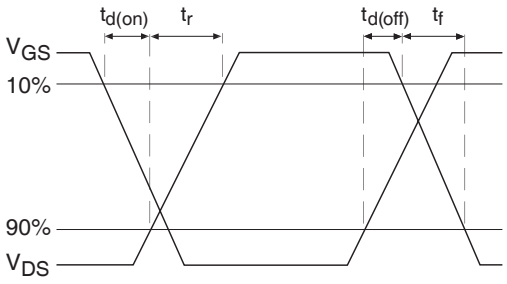


Fig 17b. Switching Time Waveforms

 © 2013 International Rectifier


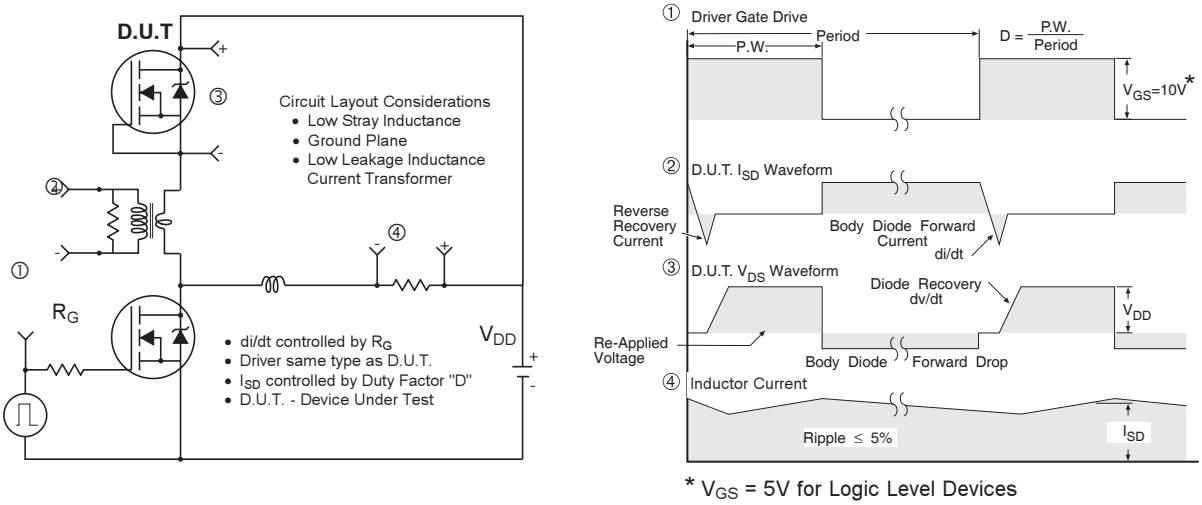



Fig 18. Diode Reverse Recovery Test Circuit for N-Channel HEXFET® Power MOSFETs

DirectFET® Board Footprint, SA Outline (Small Size Can, A-Designation).

Please see DirectFET application note AN-1035 for all details regarding the assembly of DirectFET.

This includes all recommendations for stencil and substrate designs.

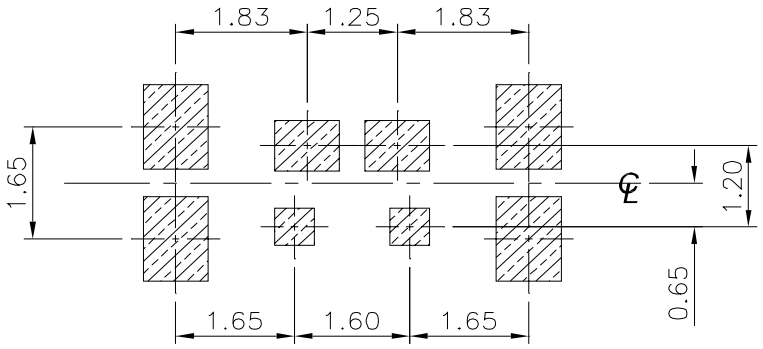

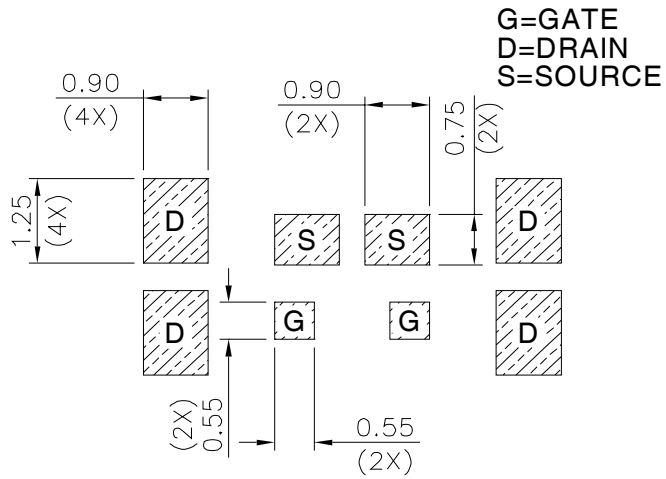


Note: For the most current drawing please refer to IR website at http://www.irf.com/package/

 © 2013 International Rectifier


DirectFET® Outline Dimension, SA Outline (Small Size Can, A-Designation).

Please see DirectFET application note AN-1035 for all details regarding the assembly of DirectFET. This includes all recommendations for stencil and substrate designs.

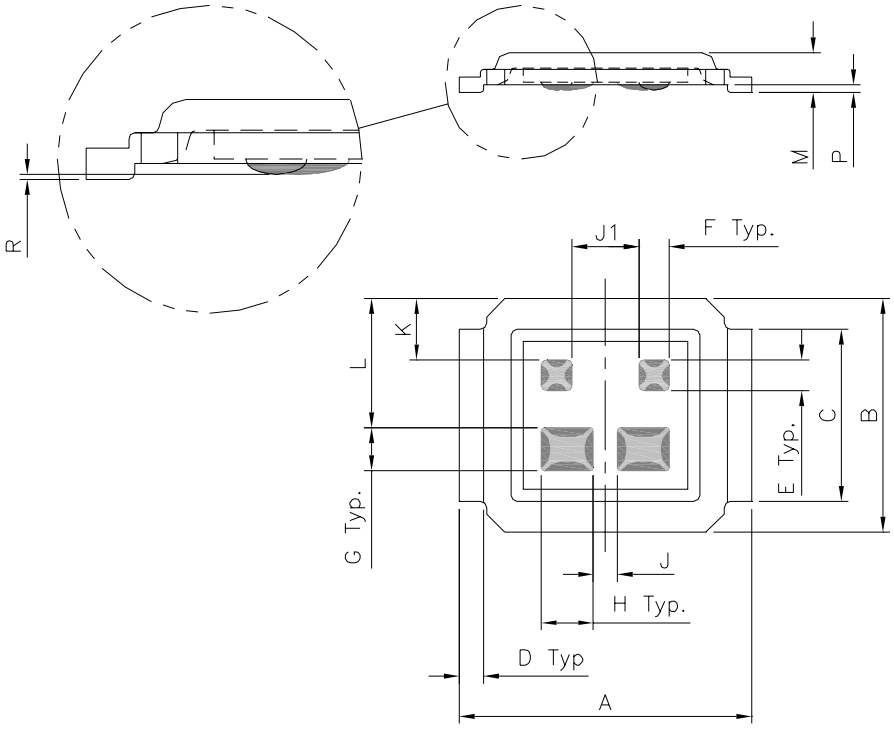

DIMENSIONS				
	METRIC		IMPERIAL	
CODE	MIN	MAX	MIN	MAX
A	4.75	4.85	0.187	0.191
B	3.70	3.95	0.146	0.156
C	2.75	2.85	0.108	0.112
D	0.35	0.45	0.014	0.018
E	0.48	0.52	0.019	0.020
F	0.48	0.52	0.019	0.020
G	0.68	0.72	0.027	0.028
H	0.83	0.87	0.033	0.034
J	0.38	0.42	0.015	0.016
J1	1.08	1.12	0.043	0.044
K	0.95	1.05	0.037	0.041
L	2.05	2.15	0.081	0.085
M	0.59	0.70	0.023	0.028
P	0.08	0.17	0.003	0.007
R	0.02	0.08	0.0008	0.0031


DirectFET® Part Marking

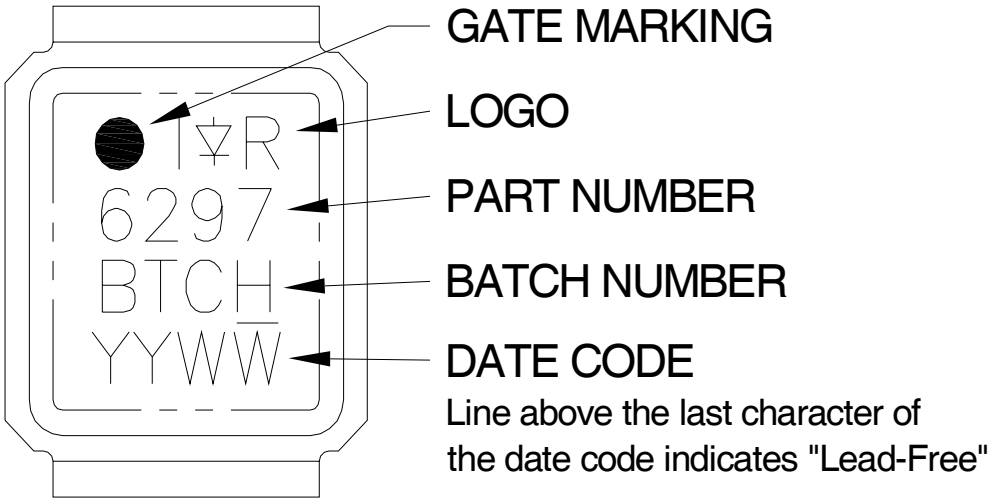

Note: For the most current drawing please refer to IR website at http://www.irf.com/package/


 © 2013 International Rectifier

DirectFET® Tape & Reel Dimension (Showing component orientation).

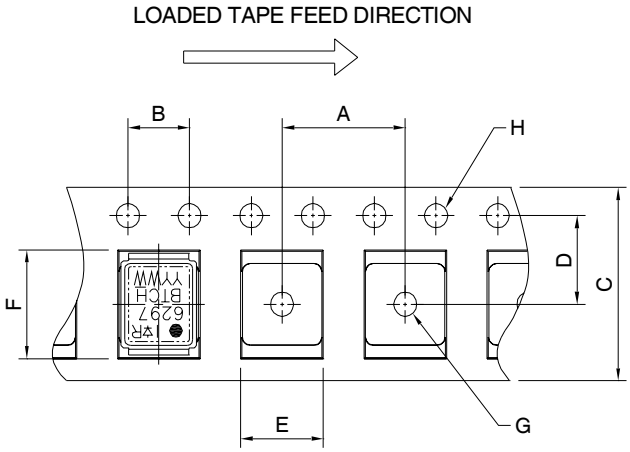

NOTE: CONTROLLING DIMENSIONS IN MM

DIMENSIONS				
	METRIC		IMPERIAL	
CODE	MIN	MAX	MIN	MAX
A	7.90	8.10	0.311	0.319
B	3.90	4.10	0.154	0.161
C	11.90	12.30	0.469	0.484
D	5.45	5.55	0.215	0.219
E	4.00	4.20	0.158	0.165
F	5.00	5.20	0.197	0.205
G	1.50	N.C	0.059	N.C
H	1.50	1.60	0.059	0.063

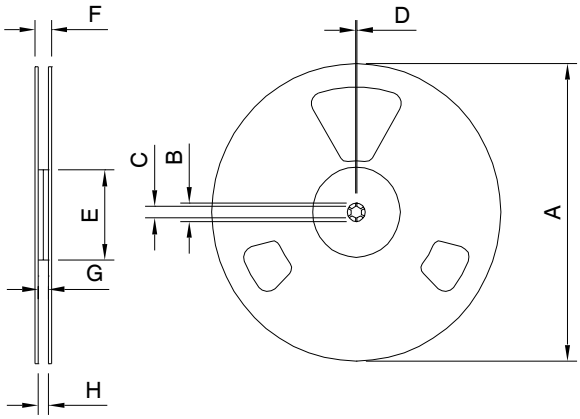

NOTE: Controlling dimensions in mm
Std reel quantity is 4800 parts. (ordered as IRL6297SDTRPBF). For 1000 parts on 7" reel, order IRL6297SDTR1PBF

REEL DIMENSIONS								
STANDARD OPTION (QTY 4800)					TR1 OPTION (QTY 1000)			
	METRIC		IMPERIAL		METRIC		IMPERIAL	
CODE	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
A	330.0	N.C	12.992	N.C	177.77	N.C	6.9	N.C
B	20.2	N.C	0.795	N.C	19.06	N.C	0.75	N.C
C	12.8	13.2	0.504	0.520	13.5	12.8	0.53	0.50
D	1.5	N.C	0.059	N.C	1.5	N.C	0.059	N.C
E	100.0	N.C	3.937	N.C	58.72	N.C	2.31	N.C
F	N.C	18.4	N.C	0.724	N.C	13.50	N.C	0.53
G	12.4	14.4	0.488	0.567	11.9	12.01	0.47	N.C
H	11.9	15.4	0.469	0.606	11.9	12.01	0.47	N.C

Qualification Information†

Qualification level	Consumer ††	
	(per JEDEC JESD47F††† guidelines)	
Moisture Sensitivity Level	DirectFET Small Can	MSL1 (per JEDEC J-STD-020D†††)
RoHS Compliant	Yes	

† Qualification standards can be found at International Rectifier's web site http://www.irf.com/product-info/reliability

†† Higher qualification ratings may be available should the user have such requirements. Please contact your International Rectifier sales representative for further information: http://www.irf.com/whoto-call/salesrep/

††† Applicable version of JEDEC standard at the time of product release.

International IOR Rectifier

IR WORLD HEADQUARTERS: 101 N. Sepulveda Blvd., El Segundo, California 90245, USA
To contact International Rectifier, please visit http://www.irf.com/whoto-call/

 © 2013 International Rectifier

IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie") .

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on the product, technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies office (**www.infineon.com**).

WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.