
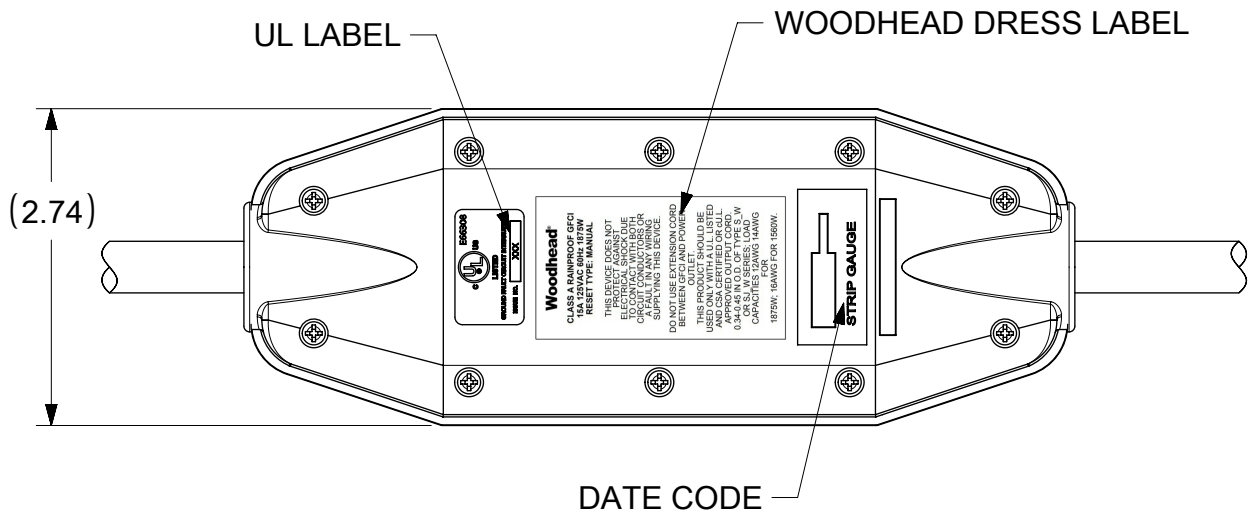
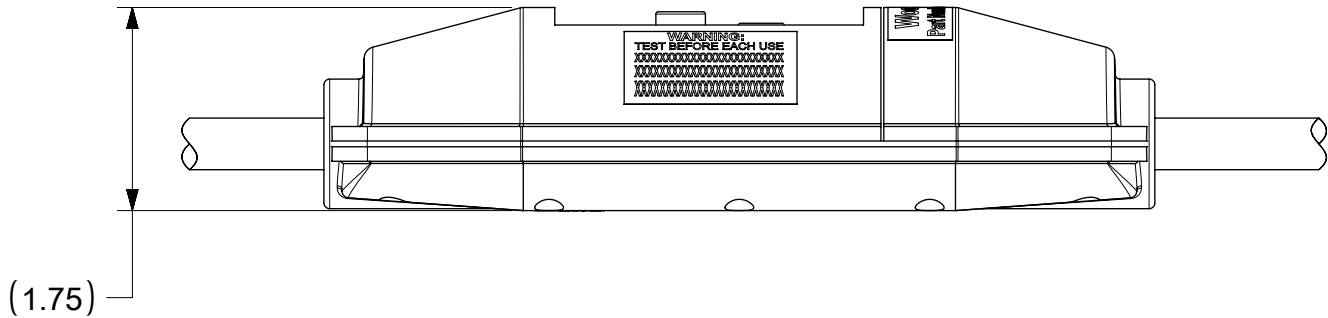
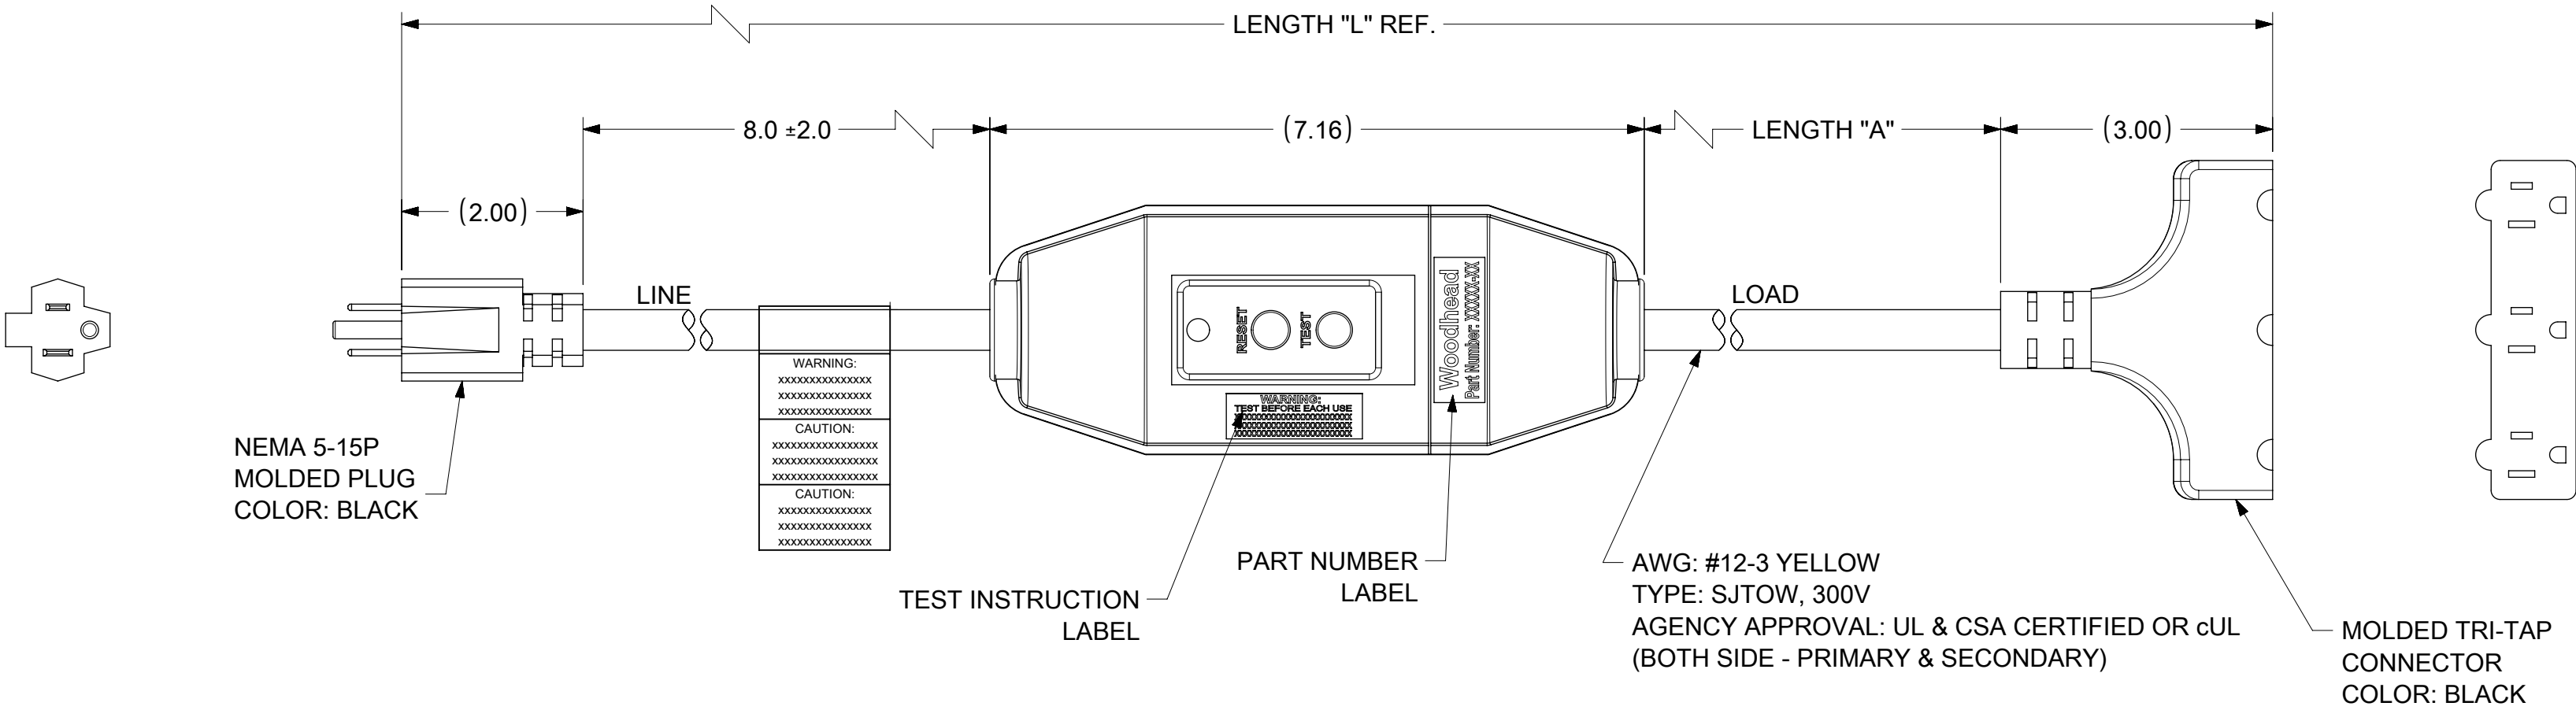




TECHNICAL

LISTED:	UL & CSA
RATED SUPPLY VOLTAGE:	120VAC
RATED CURRENT:	UP TO 15 AMPS
RESET TYPE:	AUTO OR MANUAL
OPERATING FREQUENCY:	60 Hz
TYPE:	CLASS A
GROUND TRIP CURRENT:	5mA +/- 1mA
OVERLOAD CURRENT:	90 AMPS, 0.45 PF
INSULATION VOLTAGE:	1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS:	3000 OPERATIONS
ENCLOSURE:	NEMA 3R

MATERIAL NO.	ENGINEERING NO.	LENGTH "L"	LENGTH "A"	POWER-UP
1301530029	15050-3TTA	2 FT 8 IN	1 FT ± 1 IN	AUTO
1301530040	15050-6TTA	7 FT 8 IN	6 FT ± 2 IN	AUTO
1301530026	15050-25TTA	26 FT 8 IN	25 FT ± 2 IN	AUTO
1301530034	15050-50TTA	51 FT 8 IN	50 FT ± 4 IN	AUTO
1301530030	15050-1TTM	2 FT 8 IN	1 FT ± 1 IN	MANUAL
1301530041	15050-6TTM	7 FT 8 IN	6 FT ± 2 IN	MANUAL
1301530027	15050-25TTM	26 FT 8 IN	25 FT ± 2 IN	MANUAL
1301530035	15050-50TTM	51 FT 8 IN	50 FT ± 4 IN	MANUAL

FUNCTIONAL SYMBOLS  = 0  = 0  = 0 DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION														
	DIMENSION UNITS		SCALE		CURRENT REV DESC: NEW SALES DRAWING CREATED				molex INLINE GFCI 15A, 120V W/ TRIPLE TAP CONNECTOR NEMA 5-15						
	INCH		NTS												
	GENERAL TOLERANCES (UNLESS SPECIFIED)								EC NO: 679783 DRWN: VBASUTHKARP 2021/09/30 CHK'D: DNGUYEN62 2021/10/05 APPR: HKNEELAND 2021/10/11						
	ANGULAR TOL ± 0.5 °														
4 PLACES		±		INITIAL REVISION: DRWN: VBASUTHKARP 2021/09/30 APPR: HKNEELAND 2021/10/11				DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION			
3 PLACES		±						1301530029		PSD	000	A			
2 PLACES		±													
1 PLACE		±													
0 PLACES		±													
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
						C-SIZE		130153		SEE TABLE		GENERAL MARKET		1 OF 1	

6

5

4


3

2

1

E

E

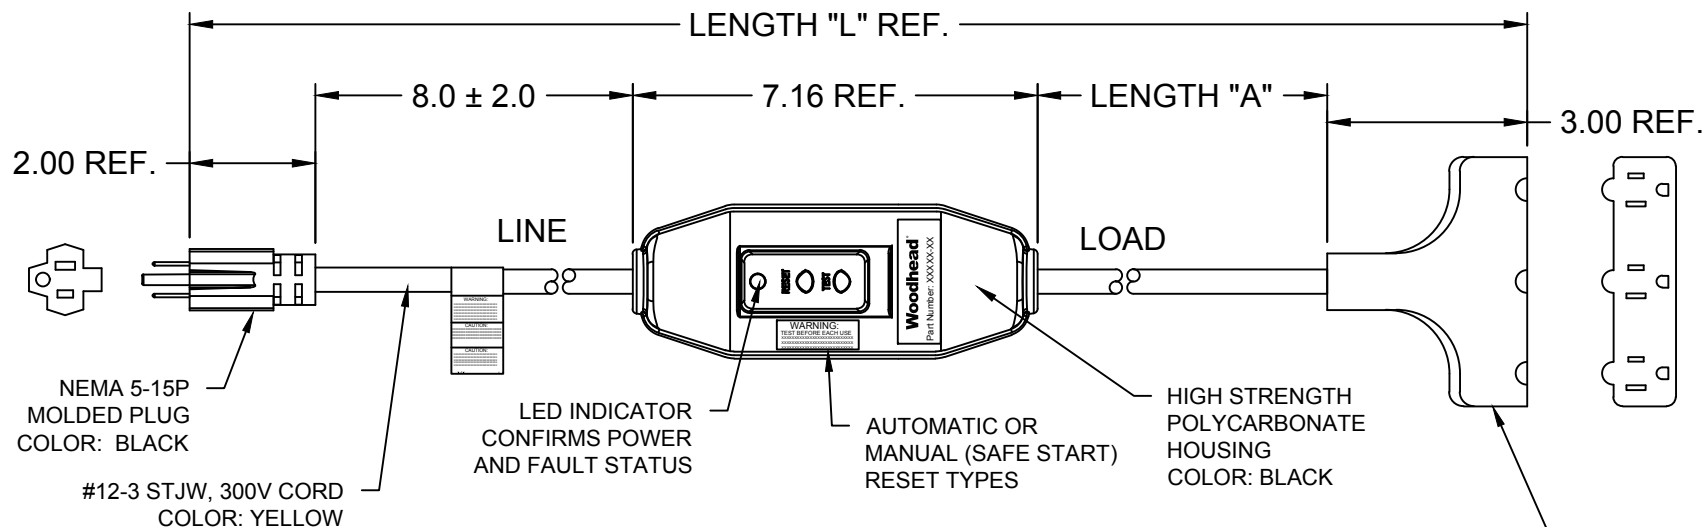


D

D

C

C

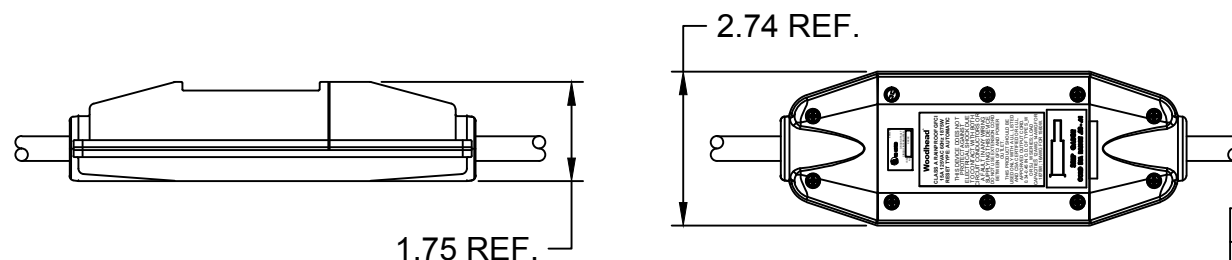

B

B

TECHNICAL:**LISTED:**

RATED SUPPLY VOLTAGE:

RATED CURRENT:

RESET TYPE:

OPERATING FREQUENCY:

TYPE:

GROUND TRIP CURRENT:

OVERLOAD CURRENT:

INSULATION VOLTAGE:

ENDURANCE OPERATIONS:

UL AND cUL

120 VAC

UP TO 15 AMPS OR CABLE RATING

AUTOMATIC OR MANUAL

60 Hz

CLASS A

4-6 mA

90 AMP 125 VAC

1,500 VRMS – 1 MINUTE

3000 OPERATIONS

A

A

INITIAL RELEASE EC NO: IGC2013-1078 DRWN: HRUIZ01 2013/02/06 CHK'D: HKNEELAN 2014/07/22 APPR: JFMURPHY 2015/04/20		DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE INCH		SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION ⊙ □			
					mm	INCH	DRAWN BY HRUIZ01	DATE 2013/02/06	TITLE 120V 15A INLINE GFCI W/ TRIPLE TAP CONNECTOR NEMA 5-15				
				4 PLACES	±---	±---	CHECKED BY HKNEELAN	DATE 2014/07/22					
				3 PLACES	±---	±.005	APPROVED BY JFMURPHY	DATE 2015/04/20	MOLEX INCORPORATED MOLEX				
2 PLACES	±0.13	±0.10	MATERIAL NO.		DOCUMENT NO.		SHEET NO.						
A	REV			1 PLACE	±0.25	±0.020	SEE TABLE		SD-130153-014		1 OF 1		
				ANGULAR ±1/2°			SIZE A		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS									

6

5

4

3

2

1