



Rev	AWO #	Description	Date	Appr
-		RELEASED	05/10/12	

APPROVED: _____

DATE: _____ TITLE: _____

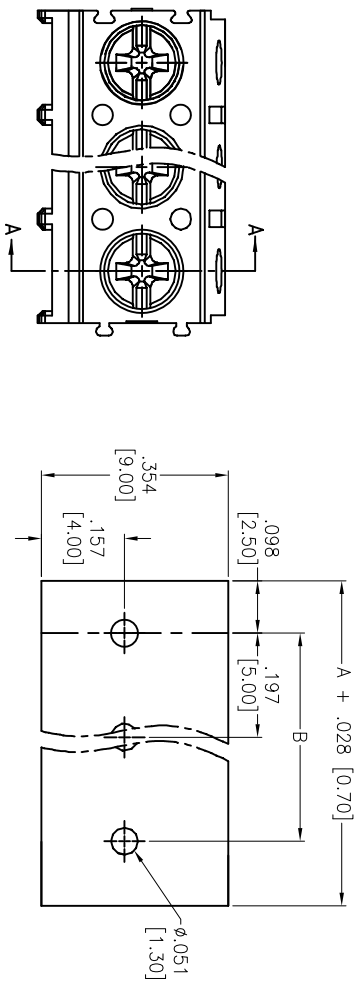

RECOMMENDED PCB LAYOUT

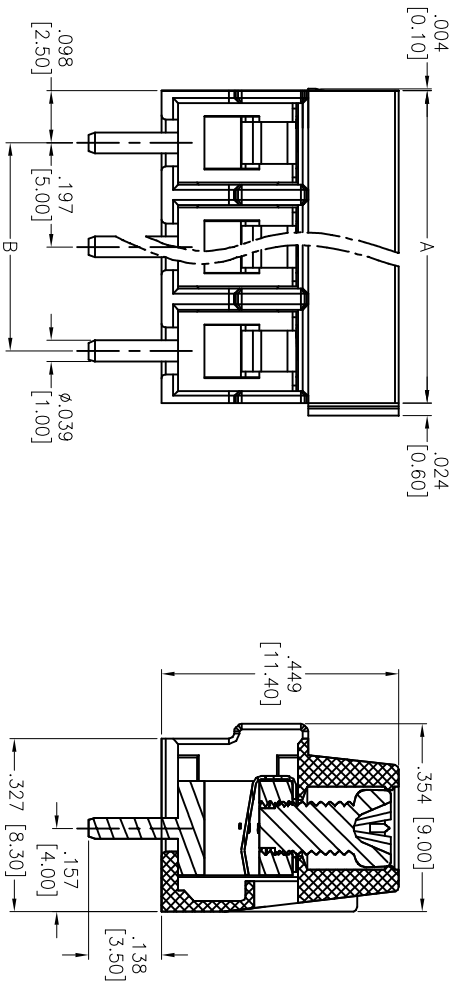

SECTION A-A

Positions: 02 thru 24
A = .197 [5.00] x No. of Positions
B = .197 [5.00] x No. of Spaces

	Dim A	Dim B
2-6P	±.006 [0.15]	±.004 [0.10]
7-12P	±.008 [0.20]	±.008 [0.20]
13-18P	±.012 [0.30]	±.010 [0.25]
19-24P	±.016 [0.40]	±.012 [0.30]

SPECIFICATIONS:

Material:
Insulator: PA66, rated UL 94V-0
Insulator color: Green
Wire guard: Stainless Steel
Contact: Brass, Tin plated
Screw: Steel, M2.6/Zn Plated
Electrical:
Operation voltage: 300 VAC
Current rating: 10 Amps
Withstanding Voltage: 1.6KV
Mechanical:
Solid wire (AWG): 12-26
Stranded wire (AWG): 12-26
Torque(lb-in): 3.5
Wire strip length (mm): 5-6
Temperature Rating:
Operating temperature: -40°C to +115°C
Environmental:
Lead free, RoHS compliant.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

EURO BLOCK, .197 [5.00] PITCH

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				ADAM TECH 909 Railway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710			
INCHES							
HOLES							
.X	± .10	ØX	± .10				
.XX	± .020	ØXX	± .015				
.XXX	± .015	ØXXX	± .010	TITLE EURO BLOCK, .197 [5.00] PITCH VERTICAL			
APPROVALS							
DATE							
DRAWN	TW	05/10/12					
CHECKED	AY	05/10/12					
APPROVED				SIZE PART NO. REV.			
REF:		S00007T					
SCALE:		N1S					
SHEET		1 OF 1					