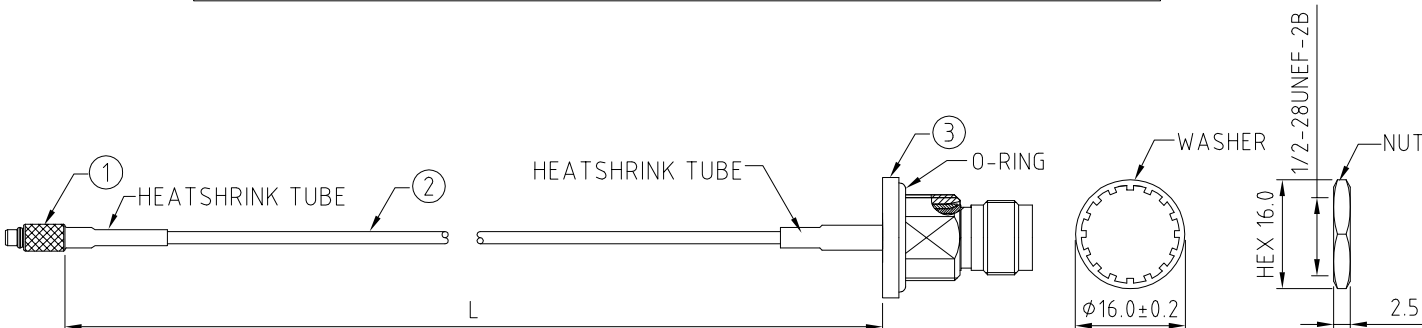
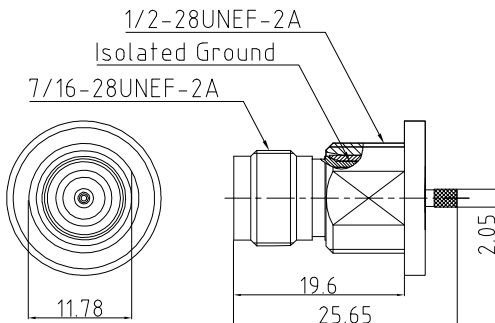



COAXIAL CABLE ASSEMBLY		CUSTOMER PRODUCT SPECIFICATION SHEET				RoHS Compliant	
CAB435RF: MMCX STRAIGHT PLUG + ISOLATED TNC BULKHEAD JACK WITH O-RING RATED TO IP67 + RG178 CABLE, 6GHz							
SPECIFICATIONS :		USAGE PRECAUTIONS: CABLES USING 'MICRO' COAX ARE DELICATE:					
1. MMCX STRAIGHT PLUG, P/N: RFCT-MMCX006-M78.		(i) HANDLE WITH CARE.					
2. RG178 COAXIAL CABLE, COLOR: BROWN.		(ii) DO NOT TWIST; APPLY EXCESSIVE FORCES OR SHARP BENDS TO THE CABLE. DO NOT FORCEFULLY DEFORM WIRES.					
3. ISOLATED TNC STRAIGHT BULKHEAD JACK WITH O-RING RATED TO IP67, P/N: RFCT-TNC016-F78.		(iii) CONSULT CONNECTOR MANUFACTURER'S DATASHEETS FOR DETAILED NOTES ON HANDLING INSTRUCTIONS.					
ENVIRONMENTAL:							
A. BULKHEAD MOUNTED CONNECTOR (RFCT-TNC016-F78) RATED TO THE FOLLOWING SPECIFICATION:							
i. IP6X - DUST TIGHT - NO PARTICLE INGRESS.							
ii. IPX7 WATERPROOF FOR 30 MINUTES UP TO 1 METER UNDERWATER.							
NOTES:							
1. WORKING FREQUENCY RANGE: DC-6GHz.							
2. OPERATING TEMPERATURE: -40°C~+125°C.							
3. IMPEDANCE: 50 Ohm.							
4. CARE SHOULD BE TAKEN NOT TO OVERTIGHTEN THE MATING CONNECTOR. OVERTIGHTENING RISKS COMPROMISING THE IP RATING OF THE CONNECTOR.							
							
							
							
HOW TO ORDER							
CAB435RF - X X X X - X - 1							
"L" LENGTH IN MM:		CABLE SIZE:					
eg: 100MM = 0100		1 = RG178 CABLE, COLOR: BROWN					
(MIN. 0050-MAX.0400		WASHER AND NUT OPTIONS:					
STANDARD = 0100, 0150, 0200)		BLANK = SEPARATELY PACKED (STANDARD)					
TOLERANCE: 50-200mm: ±5mm.		A = ASSEMBLED WITH CONNECTOR					
201-400mm: ±7mm.							