



APPROVED: _____
 DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	2/21/20	




6 POSITION




9 POSITION




12 POSITION



15 POSITION



RECOMMENDED
PCB LAYOUT
(TRIPLE ROW)

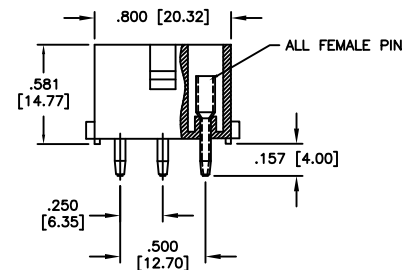

ALL FEMALE PIN

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-2

Insulator color: Natural

Contacts: Phosphor Bronze, Tin plated

Electrical:

Current rating: 06~15P: 9 Amp Max (With UL1007, 16AWG)

Contact resistance: 20 mohms max

Insulation resistance: 1,000M ohms min

Dielectric withstanding voltage: 2,900 VAC for 1 minute

Temperature Rating:

-40°C to +105°C

Environmental:

Lead free, RoHS compliant.



$$A = .250 [6.35] \times \text{No. of Spaces}$$

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010			<div>ADAM TECH</div> INTERCONNECTS		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
APPROVALS			DATE			
DRAWN		LH	2/21/20			
CHECKED		AY1	2/21/20			
APPROVED						
TITLE			WIRE TO BOARD, FEMALE, 6.35mm PITCH, WITHOUT POLARIZING PEG, FEMALE PIN			
SIZE X		PART NO. DME-F-XX-S2-SQ			REV. -	
REF: S00124T		SCALE: NTS		SHEET 1 OF 1		