

6

5


4

3


2

1

CATALOG NUMBER	MATERIAL NUMBER	CONDUIT SIZE	N.P.T. FITTING SIZE	LENGTH "M"	DIAMETER "A" REF.	LENGTH "B" REF.	LENGTH "C" REF.	LENGTH "D" REF.	PRODUCT SELECTION NUMBER	 UL LISTED	 CSA APRVD
36443	1300960058	3/8"	1/2"	3.875±0.500 / 98.43±12.70	1.0 / 25	1.13 / 28.7	0.63 / 16.0	1.25 / 31.8	STB038P-90	Y E S	Y E S
36400	1300960050	1/2"	1/2"	4.625±0.500 / 117.48±12.70	1.2 / 30	1.25 / 31.8	0.63 / 16.0	1.25 / 31.8	STB050P-90		
36401	1300960051	3/4"	3/4"	5.750±0.500 / 146.05±12.70	1.4 / 36	1.50 / 38.1	0.63 / 16.0	1.44 / 36.6	STB075P-90		
36402	1300960052	1"	1"	7.000±0.500 / 177.80±12.70	1.7 / 43	1.81 / 45.9	0.75 / 19.1	1.38 / 35.1	STB100P-90		
36403	1300960053	1-1/4"	1-1/4"	8.125±1.000 / 206.38±25.40	2.0 / 51	2.31 / 58.7	0.63 / 16.0	1.81 / 45.9	STB125P-90		
36404	1300960054	1-1/2"	1-1/2"	9.250±1.000 / 234.95±25.40	2.5 / 64	2.63 / 66.8	0.63 / 16.0	2.44 / 61.9	STB150P-90		
36405	1300960055	2"	2"	11.500±1.000 / 292.10±25.40	3.0 / 76	3.19 / 81.0	0.69 / 17.5	2.63 / 66.8	STB200P-90		
37033	-----	2-1/2"	2-1/2"	11.250±1.000 / 285.75±25.40	3.6 / 91	3.94 / 100.1	1.06 / 26.9	7.19 / 182.6	STB250P-90		
37034	-----	3"	3"	14.750±1.500 / 374.65±38.10	4.3 / 109	4.38 / 111.3	1.19 / 30.2	8.63 / 219.2	STB300P-90		
37035	-----	4"	4"	16.250±1.500 / 412.75±38.10	5.4 / 137	5.50 / 139.7	1.25 / 31.8	11.25 / 285.8	STB400P-90		

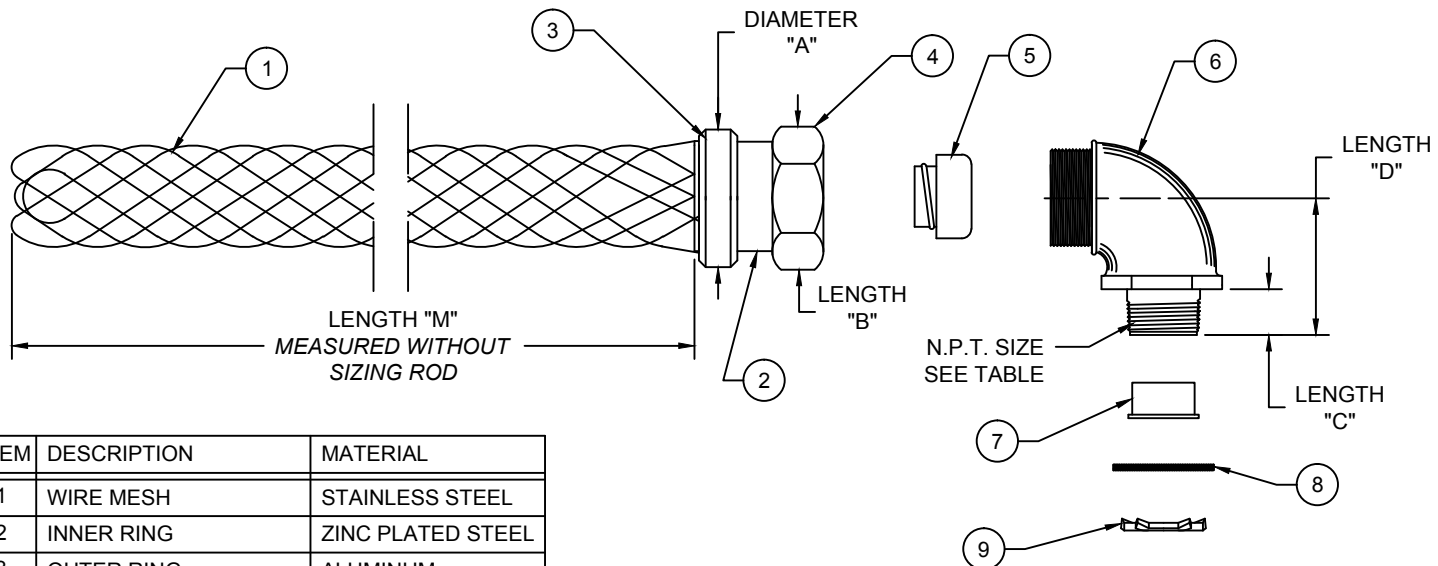

ASSEMBLED GRIP

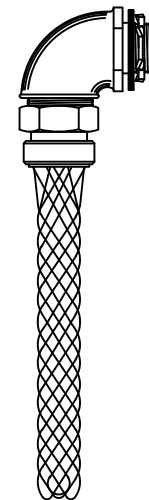INSTRUCTIONS INCLUDED
WITH GRIP

ITEM	DESCRIPTION	MATERIAL
1	WIRE MESH	STAINLESS STEEL
2	INNER RING	ZINC PLATED STEEL
3	OUTER RING	ALUMINUM
4	COMPRESSION NUT	ZINC PLATED STEEL OR MALLEABLE IRON
5	FERRULE	ZINC PLATED STEEL OR ALUMINUM
6	THREADED BODY	ZINC PLATED STEEL OR MALLEABLE IRON
7	THROAT INSULATION	PLASTIC
8	GASKET	NEOPRENE
9	LOCK NUT	ZINC PLATED STEEL

RELEASE SALES DRAWING EC NO: IPG2015-0536 DRWN: HRUIZ01 2014/09/23 CHKD: HKNEELAN 2014/09/23 APPR: JFMURPHY 2015/04/27			QUALITY SYMBOLS ▽=0 ◁=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE INCH/MM		SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
DESCRIPTION A		mm		INCH	DATE		TITLE STRAIN RELIEF LIQUID TIGHT CONDUIT STRAIGHT- 90 DEGREE					
	4 PLACES	±---		±---	HRUIZ01	2014/09/23						
	3 PLACES	±---		±.005	DATE		MOLEX INCORPORATED					
	2 PLACES	±.13		±.010	DATE							
	1 PLACE	±.25		±.020	DATE		DOCUMENT NO. SD-130096-101					
	ANGULAR ±1/2°			DATE		SHEET NO. 1 OF 1						
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			MATERIAL NO. SEE TABLE								THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
REV		SIZE A										