


**Model 4846-C**  
**SMA Plug to SMA Plug, RG58C/U**

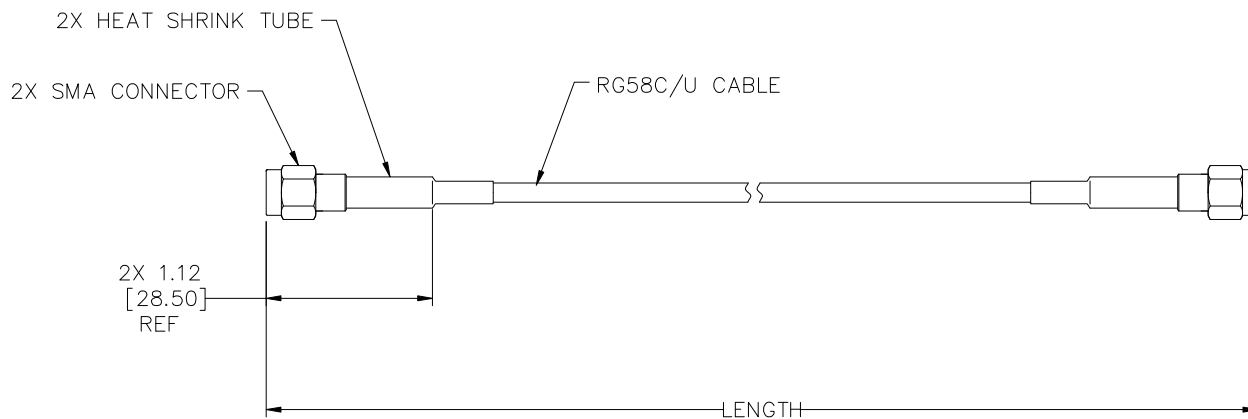

*Model 4846-C*  
*SMA Plug to SMA Plug, RG58C/U*

Small size, and durability for  
confident connections

**Features**

- DC - 4GHz bandwidth.
- Connectors are precision machined and gold-plated for low loss.
- Perfect for applications where space, weight, performance and ease of connection are required.

**Materials**

- SMA Male Connector:
- Center Contact: Brass, Gold Plated
  - Connector Body: Brass, Gold Plated
  - Crimp Ferrule: Copper, Nickel Plated
  - Insulators: PTFE

**Specifications**

<b>Cable Type</b>	RG58C/U
<b>Impedance</b>	50Ω
<b>Frequency Range</b>	DC - 4GHz
<b>Insulation Resistance</b>	≥ 1000 MΩ
<b>Insulator Withstand</b>	750V
<b>Temperature Range</b>	-65° C to +165°C (-85°F to +329°F)
<b>Jacket</b>	PVC2
<b>Cable O.D.</b>	0.193" (4.9mm)
<b>Center Conductor (mm)</b>	19 x .18 tinned copper

**Ordering Information**

- Model: **4846**  
 Cable Designator: **C** = RG58C/U  
 Standard Lengths: **12", 24", 36", 48", 60"**
- 12" ± .157" (305mm ± 4mm)
  - 24" ± .275" (610mm ± 7mm)
  - 36" ± .394" (914mm ± 10mm)
  - 48" ± .512" (1219mm ± 13mm)
  - 60" ± .630" (1524mm ± 16mm)
- Ordering Example: **4846-C-36**, Cable is RG58C/U with length of 36" (914mm)

**USA:** Sales: 800-490-2361  
 Technical Support: [technicalsupport@pomonatest.com](mailto:technicalsupport@pomonatest.com)  
 Fax: 425-446-5844

**Europe:** 31-(0) 40 2675 150 **International:** 425-446-5500  
**Where to Buy:** [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ± .005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.