


CATALOG NUMBER	MATERIAL NUMBER	CABLE RANGE	LENGTH "M"	LENGTH "B"	LACE LENGTH (2 REQUIRED)	BREAK STRENGTH* (LBS/N)	UL LISTED	CSA APPROVED	PRODUCT SELECTION NUMBER
36120	1300950240	.75-.99 / 19.1-25.1	13.00±1.50 / 330.2±38.1	7.00±1.00 / 177.8±25.4	41.0±1.0 / 1041±25	3000 / 13345	N O	Y E S	SSK075-1
36121	1300950241	1.00-1.24 / 25.4-31.5	16.00±2.00 / 406.4±50.8	8.00±1.00 / 203.2±25.4	49.0±2.0 / 1245±51	4100 / 18238			SSK100-1
36122	1300950242	1.25-1.49 / 31.8-37.8	17.00±2.00 / 431.8±50.8	8.00±1.00 / 203.2±25.4	52.0±2.0 / 1321±51	4100 / 18238			SSK125-1
36123	1300950243	1.50-1.74 / 38.1-44.2	18.00±2.00 / 457.2±50.8	9.00±1.00 / 228.6±25.4	54.0±2.0 / 1372±51	5500 / 24465			SSK150-1
36124	1300950244	1.75-1.99 / 44.5-50.5	19.00±2.00 / 482.6±50.8	10.00±1.00 / 254.0±25.4	58.0±2.0 / 1473±51	7300 / 32472			SSK175-1
36125	1300950245	2.00-2.49 / 50.8-63.2	20.00±2.00 / 508.0±50.8	10.00±1.00 / 254.0±25.4	70.0±2.0 / 1778±51	7300 / 32472			SSK200-1
36126	1300950246	2.50-2.99 / 63.5-75.9	21.00±2.50 / 533.4±63.5	10.00±1.00 / 254.0±25.4	73.0±2.0 / 1854±51	7300 / 32472			SSK250-1
36127	1300950247	3.00-3.49 / 76.2-88.6	22.00±2.50 / 558.8±63.5	12.00±1.00 / 304.8±25.4	76.0±2.0 / 1930±51	9200 / 40924			SSK300-1
36128	1300950248	3.50-3.99 / 88.9-101.3	23.00±2.50 / 584.2±63.5	12.00±1.00 / 304.8±25.4	80.0±2.0 / 2032±51	11000 / 48930			SSK350-1

* TO DETERMINE RECOMMENDED WORKING LOAD, DIVIDE BREAK STRENGTH BY 5.

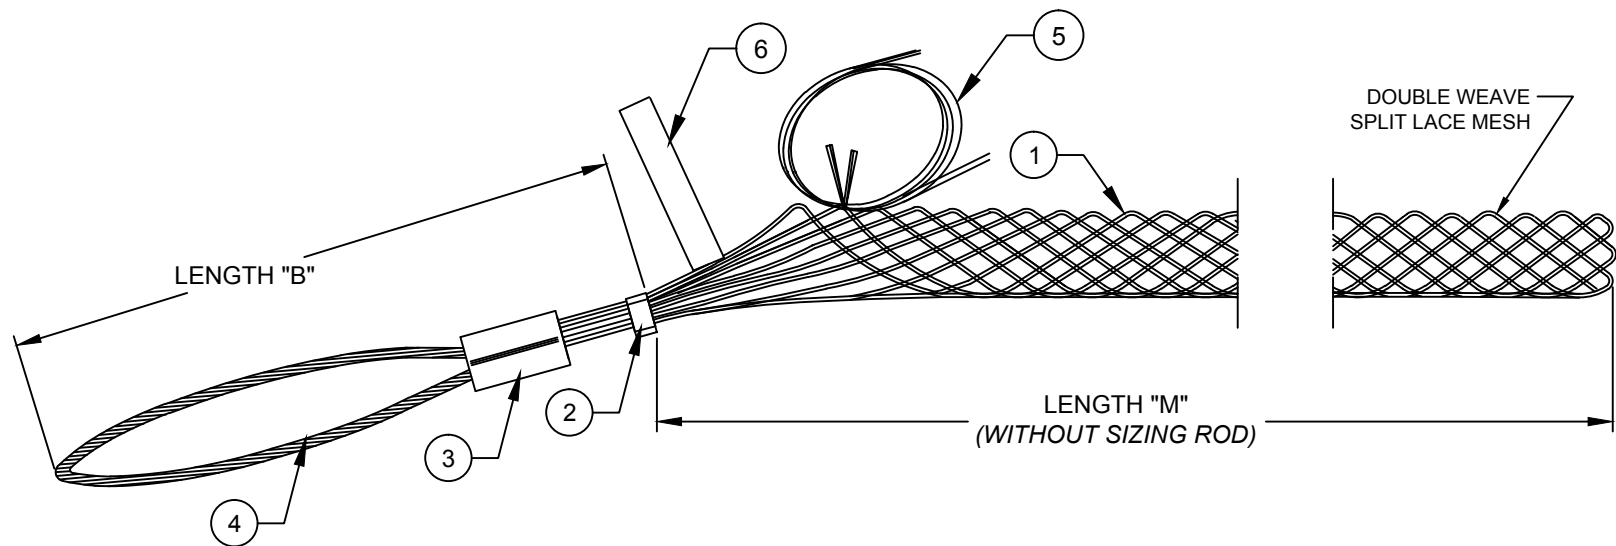

ITEM	DESCRIPTION	MATERIAL
1	WIRE MESH	GALVANIZED STEEL
2	CRIMP CONNECTOR	ALUMINUM
3	FERRULE	ALUMINUM
4	BALE WIRE	STAINLESS STEEL
5	LACE	GALVANIZED STEEL
6	LABEL	MYLAR

RELEASE SALES DRAWING		EC NO.: IPG2015-1861		DRWN: HRUIZ01 2014/09/05		CHKD: HKNEELAN 2014/09/05		APPR: JFMURPHY 2016/09/09		DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE INCH/MM		SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION																														
											 =0		<table><tr><td></td><td>mm</td><td>INCH</td></tr><tr><td>4 PLACES</td><td>±---</td><td>±---</td></tr><tr><td>3 PLACES</td><td>±---</td><td>±.005</td></tr><tr><td>2 PLACES</td><td>±.13</td><td>±.010</td></tr><tr><td>1 PLACE</td><td>±.25</td><td>±.020</td></tr></table>		mm	INCH	4 PLACES	±---	±---	3 PLACES	±---	±.005	2 PLACES	±.13	±.010	1 PLACE	±.25	±.020	<table><tr><td></td><td></td></tr><tr><td>DRAWN BY</td><td>DATE</td></tr><tr><td>HRUIZ01</td><td>2014/09/05</td></tr><tr><td>CHECKED BY</td><td>DATE</td></tr><tr><td>HKNEELAN</td><td>2014/09/05</td></tr><tr><td>APPROVED BY</td><td>DATE</td></tr><tr><td>JFMURPHY</td><td>2016/09/09</td></tr></table>			DRAWN BY	DATE	HRUIZ01	2014/09/05	CHECKED BY	DATE	HKNEELAN	2014/09/05	APPROVED BY	DATE	JFMURPHY	2016/09/09	TITLE					
	mm	INCH																																															
4 PLACES	±---	±---																																															
3 PLACES	±---	±.005																																															
2 PLACES	±.13	±.010																																															
1 PLACE	±.25	±.020																																															
DRAWN BY	DATE																																																
HRUIZ01	2014/09/05																																																
CHECKED BY	DATE																																																
HKNEELAN	2014/09/05																																																
APPROVED BY	DATE																																																
JFMURPHY	2016/09/09																																																
										PULLING GRIPS HEAVY DUTY-SLACK EYE DOUBLE WEAVE SPLIT LACE																																							
										MOLEX INCORPORATED																																							
										MOLEX																																							
										DOCUMENT NO.																																							
										SHEET NO.																																							
										1 OF 1																																							
A		REV										DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE TABLE		SD-130095-114																																
															SIZE A		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																																