

APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/14/11	
A		ADDED SPEC.	7/25/11	
B		UPDATE SPEC.	11/11/19	AY/EY

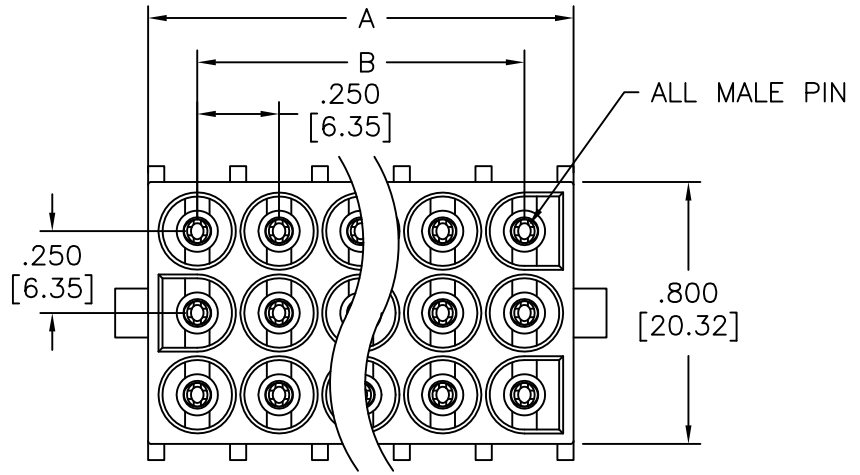

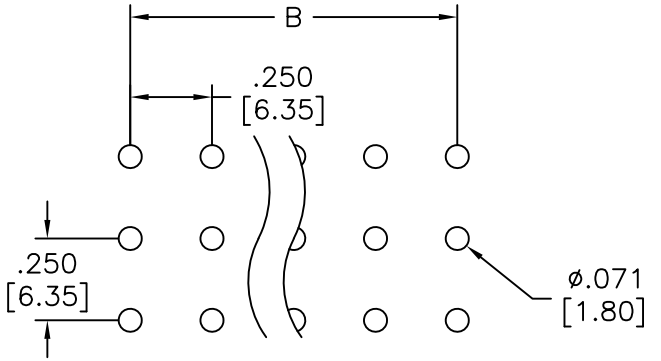

Recommended PCB Layout

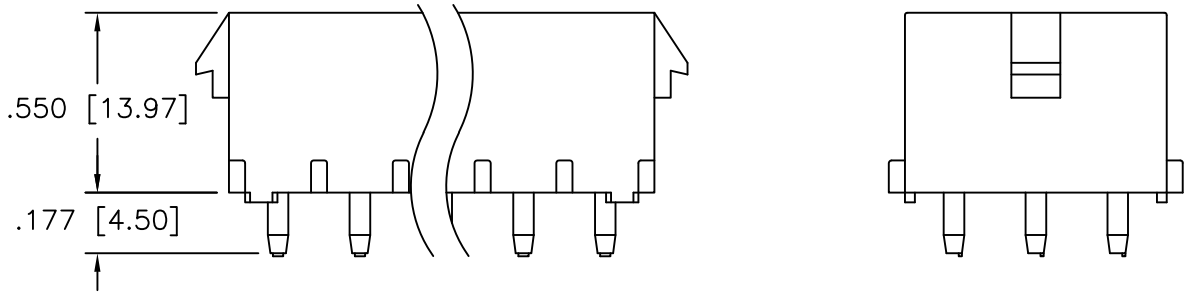

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V–0

Insulator color: White

Contacts: Phosphor Bronze, Tin plated

Electrical:

Operating voltage: 600 VAC max

Current rating: 13 Amps max.

Insulation resistance: 1000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 5000 VAC for 1 minute

Temperature Rating:

Operating temperature: –55°C to +105°C

Environmental:

Lead free, RoHS compliant.

RoHS COMPLIANT

A = .250 [6.35] X No. of Positions + .050 [1.27]

B = .250 [6.35] X No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	1/14/11
CHECKED		
APPROVED		

ADAM TECH INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: WIRE TO BOARD, FEMALE, 6.35mm PITCH WITHOUT POLARIZING

SIZE	PART NO.	REV.
X	DME-XX-S-SQ-V0	B


REF:	SCALE:	SHEET
S000123T	NTS	1 OF 2

Rev	AWO #	Description	Date	Appr
SEE SHT 1 OF 2 FOR REVISION				


APPROVED: _____

DATE: _____ TITLE: _____


6 POSITION




12 POSITION

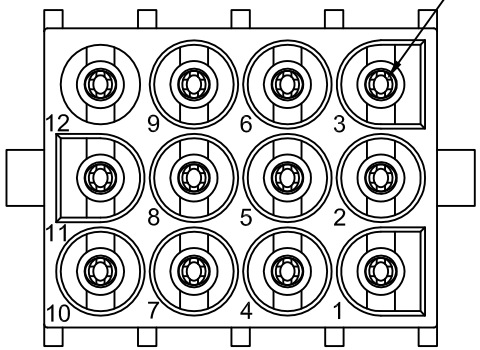

9 POSITION

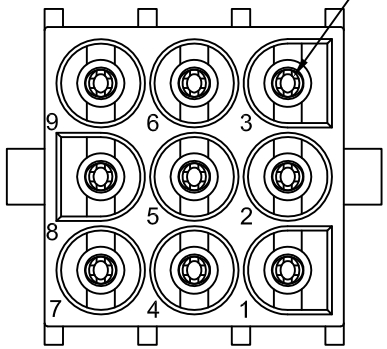

15 POSITION

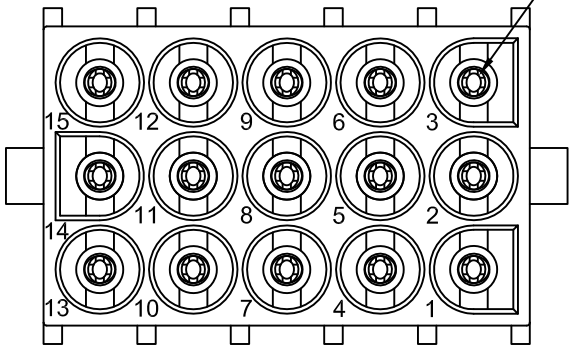

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	1/14/10
CHECKED		
APPROVED		

ADAM TECH
INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: WIRE TO BOARD, FEMALE, 6.35mm PITCH WITHOUT POLARIZING

SIZE	PART NO.	REV.
X	DME-XX-S-SQ-V0	B

REF:	SCALE:	SHEET
S000123T	NTS	2 OF 2