

DESCRIPTION: 2MM RECEPTACLES - DUAL ROW - SMT



UNITS = INCHES [MM]

MATERIAL:

HOUSING: NYLON 6T, UL 94V-0, BLACK
 CONTACT: PHOSPHOR BRONZE
 PLATING: GOLD FLASH ENTIRE CONTACT



ELECTRICAL:

CURRENT RATING: 2 AMPS
 CONTACT RESISTANCE: 20mOHMS Max.
 INSULATOR RESISTANCE: 5,000MOHMS Min.
 DIELECTRIC WITHSTANDING: 500VAC
 OPERATING TEMPERATURE: -40° TO +105° C
 PROCESS TEMPERATURE: 260° C FOR 10 SECONDS

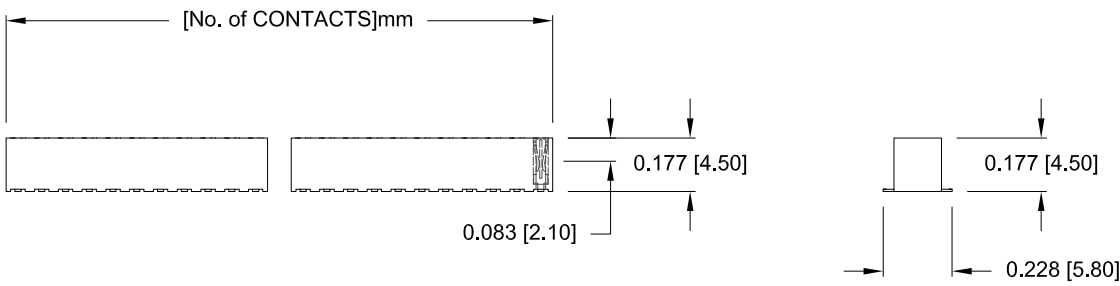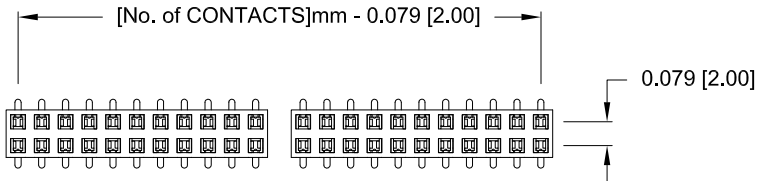

2864 YY 06 R P2

SERIES _____
 2864 = DUAL ROW
 POSITIONS _____
 DUAL - INCREMENTS OF 2
 (6 TO 80)
 TYPE _____
 06 = SURFACE MOUNT
 RoHS COMPLIANT _____
 HIGH TEMP.
 PLATING _____
 P2 = GOLD FLASH

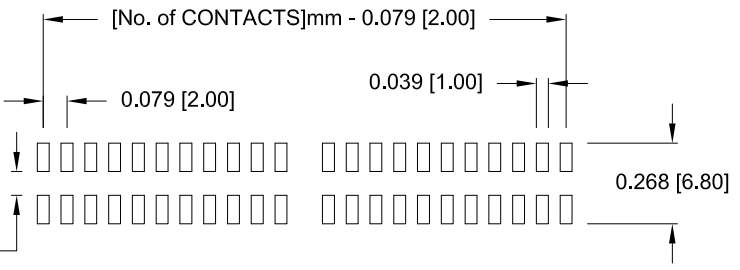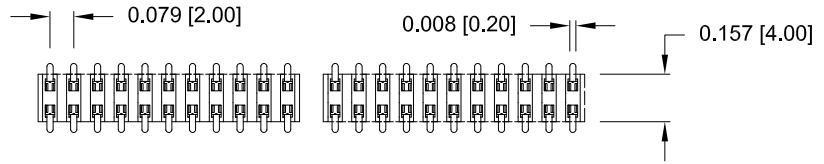

PCB LAYOUT

GENERAL TOLERANCE = ±0.008 [±0.20]

DO NOT SCALE FROM DRAWING

RoHS COMPLIANT

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: J. KADEL	DATE: 03/05/2019
	NorComp		SCALE: NTS	SHEET 1 OF 1
DWG NO. 2864YY06RP2				