

APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/19/07	
A	11345	REDRAWN	5/09/11	
B	11345	Revised specs, material and operating temp	9/7/12	
C	11345	REDRAWN	3/12/13	
D	11345	REDRAWN	6/14/13	
E	11345	ADDED SPEC.	3/20/14	HR/KW
F	11345	REVISED SPEC.	9/17/15	AY/MW

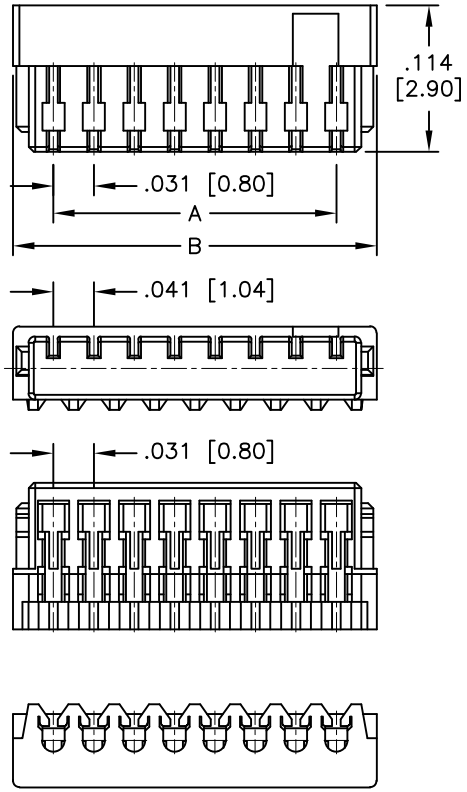

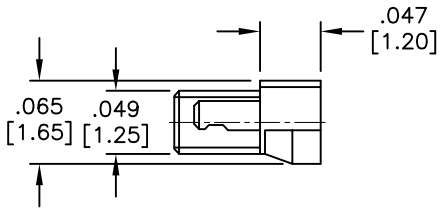

SPECIFICATIONS:
Material:
Insulator: Polyamide, rated UL 94V–0,
Insulator color: Natural
Contacts: Copper Alloy
Plating:
Tin plated over Copper underplate overall
Electrical:
Voltage rating: 30V DC
Current rating: 0.5A AC/DC (32 Awg wire)
0.2A AC/DC (36 Awg wire)
Contact resistance: 20 mohms max
Insulation resistance: 100MΩ min
Dielectric withstanding voltage: 200V AC for 1 minute
Temperature Rating:
Operating temperature: –25°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

Positions: 02 thru 20, 22
A = .031 [0.80] x No. of Spaces
B = .031 [0.80] x No. of Spaces + .063 [1.60]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	BW	01/17/07
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: 0.8mm HOUSING IDC TYPE

SIZE	PART NO.	REV.
X	08CH-A-XX-IDC	F

REF: S00015T | SCALE: NTS | SHEET 1 OF 1