


REV.	REVISION	DATE

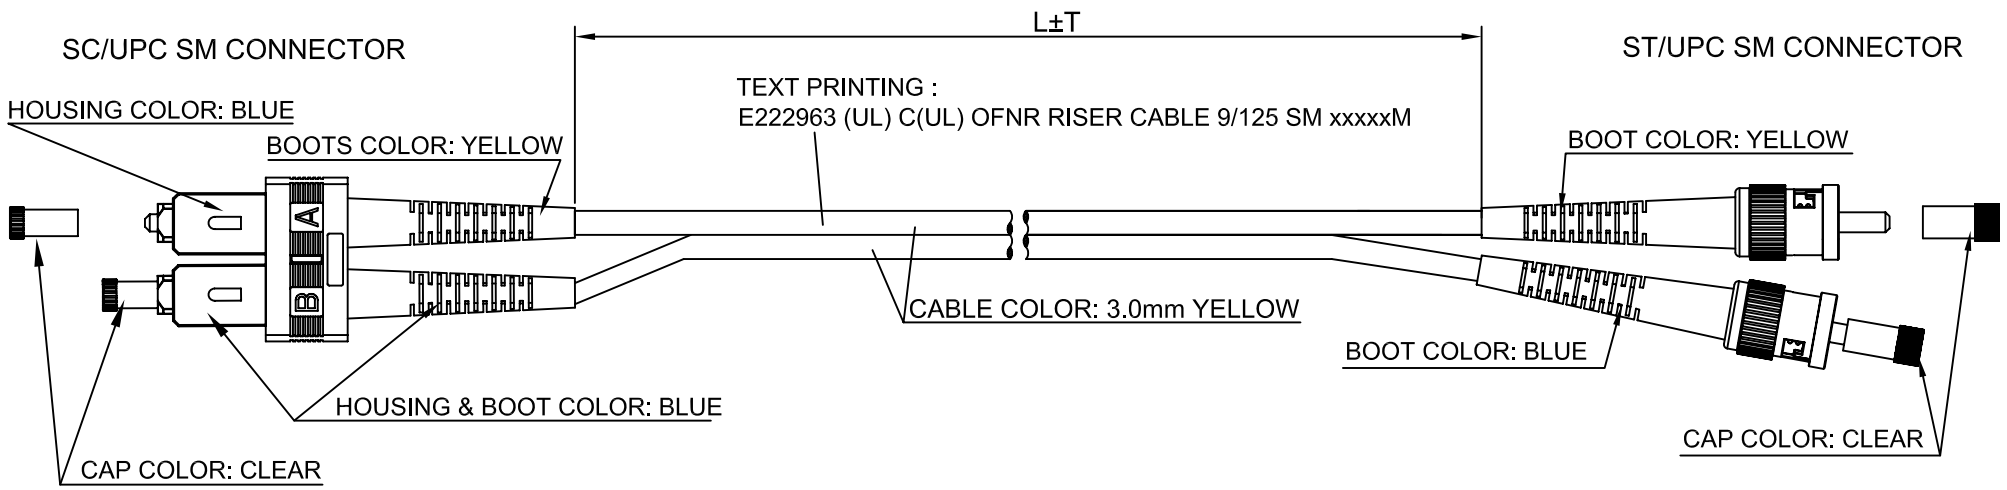

**DFSM-STSC-XX**  
 xxM ST/SC SM 9/125, DUPLEX RISER  
 QTY. 1  
[www.bb-elec.com](http://www.bb-elec.com)


DETAIL A

- NOTES:
1. INSERTION LOSS < 0.5dB.
  2. RETURN LOSS: CONNECTOR 1 > 55dB, CONNECTOR 2 > 55dB
  3. OPERATION TEMP: -20°C TO +60°C
  4. YELLOW PVC OUTER JACKET
  5. INDIVIDUALLY BAGGED AND LABELED, (SEE DETAIL A)

CHART

Part No.	XX	L	T	Barcode
DFSM-STSC-10M	10	32.8'(10000)	+2"/-0(+50/-0)	
DFSM-STSC-5M	5	16.4'(5000)	+2"/-0(+50/-0)	
DFSM-STSC-3M	3	9.84'(3000)	+2"/-0(+50/-0)	
DFSM-STSC-2M	2	6.56'(2000)	+2"/-0(+50/-0)	
DFSM-STSC-1M	1	3.28'(1000)	+2"/-0(+50/-0)	

**B&B Electronics Manufacturing Co.**

	UNIT: Inches[mm]	TITLE: xxM DUPLEX 9/125 SINGLE MODE SC/ST RISER JUMPER YELLOW CABLE WITH CLIP	
	DRAWN BY: A. MEDINA	DATE: 05/12/2008	
CHECKED BY:	DATE:	DRAWING NO. C.D. 2388	REV. A
APPROVED BY:	DATE:	REF:	
P.O. NO.:	DATE:	PART NO. DFSM-STSC-XX	