

6

5

4

3




2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	2/21/20	

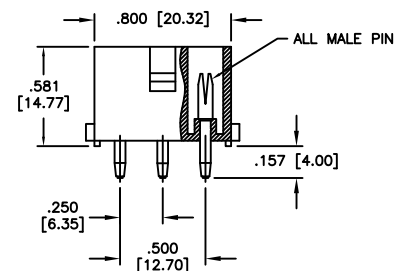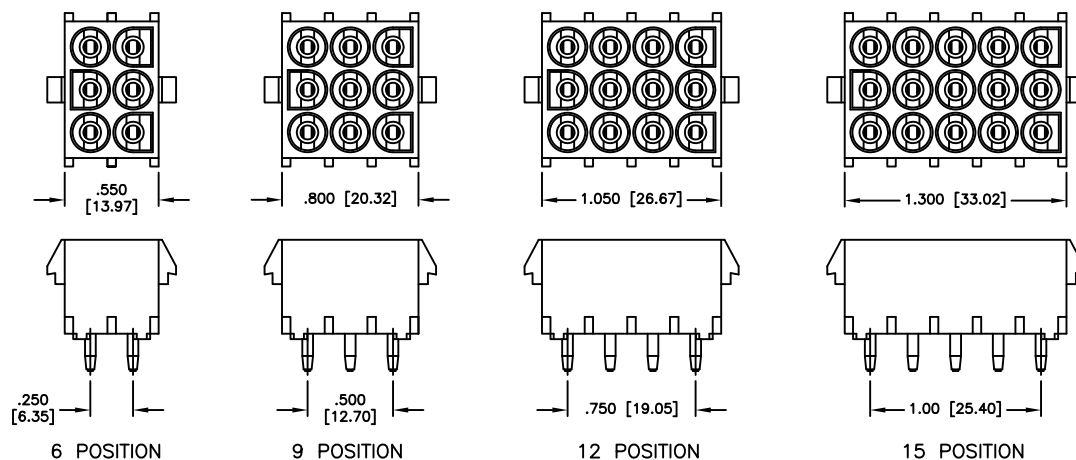

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-2

Insulator color: Natural

Contacts: Phosphor Bronze, Tin plated

Electrical:

Current rating: 06~15P: 9 Amp Max (With UL1007, 16AWG)

Contact resistance: 20 mohms max

Insulation resistance: 1,000M ohms min

Dielectric withstanding voltage: 2,900 VAC for 1 minute

Temperature Rating:

-40°C to +105°C

Environmental:

Lead free, RoHS compliant.



A = .250 [6.35] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010	ADAM TECH INTERCONNECTS		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
	TITL		WIRE TO BOARD, FEMALE, 6.35mm PITCH, WITHOUT POLARIZING PEG, MALE PIN	
DRAWN	LH	2/21/20		REV.
CHECKED	AY1	2/21/20		-
APPROVED				
SIZE	X		PART NO.	
REF:	S00124T		DME-XX-S2-SQ	
SCALE:	NTS		SHEET	1 OF 1