


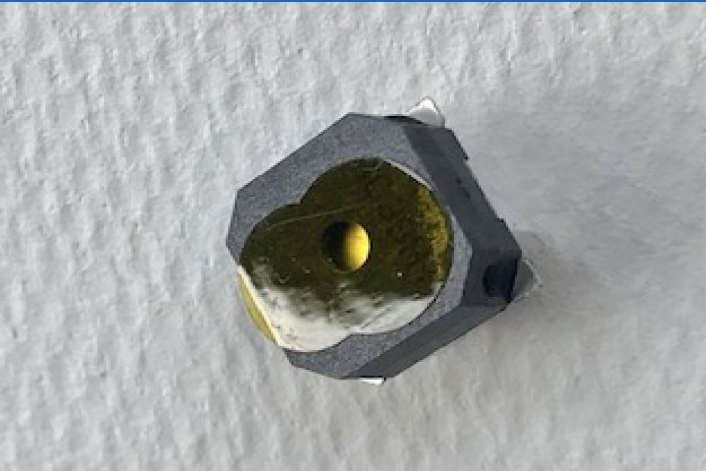

CONTENTS

This document contains the technical specifications for the electromagnetic buzzer.

Page 1
Specifications

Mechanical Characteristics

Page 2
Environment Test

Reliability Test

Page 3
Recommended Temperature Profile


Measurement Test Circuit

Measurement Method

Page 4
Frequency Response Curve

Page 5
Dimensions

Page 6
Packing

Specifications			
Item	Unit	Specification	Condition
Rated Voltage	Vo-p	3.6	Vo-p  0V
Operating Voltage	Vo-p	2.4 ~ 4.5	
Mean Current	mA	100 Max.	At rated voltage, 2730 Hz square wave, ½ duty
Coil Resistance	Ω	16 ±3	
Sound Output	dB	88	At 10cm(A-weight free air), at rated voltage 2730Hz, square wave, ½ duty
Rated Frequency	Hz	2730	
Operating Temp	°C	-30 ~ +75	
Storage Temp	°C	-40 ~ +85	
Dimension	mm	L8.5×W8.5 × H3.0	See attached drawing
Weight	gram	0.4	
Material		LCP (Black)	
Terminal		SMD type (Plating Sn)	See attached drawing
Environmental Protection Regulation		RoHS	

Test Condition

Temperature : +25±2 °C Relative Humidity: 65±5% Air Pressure: 86-106KPa

Mechanical Characteristics		
Item	Test condition	Evaluation standard
Solderability	Lead terminals are immersed in the solder bath at +250±5°C for 3±1 seconds.	90% min. lead terminals shall be wet with solder No interference in operation.
Soldering Heat Resistance	The product follows the reflow temperature curve to test its reflow thermal stability.	
Terminal Mechanical Strength	Lead pads shall be soldered on the pc board, and the force of 9.8N (1.0Kg) shall be applied to the part for 10 seconds.	No damage and cutting off
Vibration	The part shall be subjected to a vibration cycle of 10Hz to 55Hz to 10Hz in a period of 1 minute. Total peak amplitude shall be 1.52mm(9.3G). The vibration test shall consist of 2 hours per axis in each three axes (X,Y,Z). Total 6 hours.	After the test, the part shall meet specifications without any damage in appearance and performance except SPL. The SPL should be in ±10dBA compared with initial one.
Drop Test	The part is dropped from a height of 75cm onto a 40mm thick wooden board 3 times in 3 axes (X,Y,Z). Total of 9 times.	




soberton inc.

ST BUZZER

Acoustic Product Specification

Product Number: ST-A03BH

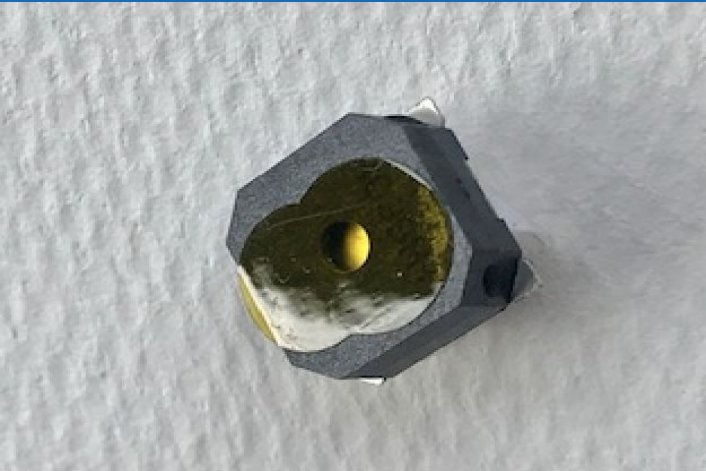

Release | Revision: B/2019

CONTENTS

This document contains the technical specifications for the electromagnetic buzzer.

Page 1

Specifications

Mechanical Characteristics

Page 2

Environment Test

Reliability Test

Page 3

Recommended Temperature Profile

Measurement Test Circuit

Measurement Method

Page 4

Frequency Response Curve


Page 5


Dimensions

Page 6

Packing

Environment Test

Item	Test condition	Evaluation standard
High Temp. Test	The part is placed in a chamber at +85°C for 48 hours	After the test, the part shall meet specifications without any degradation in appearance and performance except SPL. After 4 hours at +25°C, the SPL will be in ±10dBA compared with initial one.
Low Temp. Test	The part is placed in a chamber at -40°C for 48 hours	
Thermal Shock	The part shall be subjected to 10 cycles. Each cycle shall consist of: 	

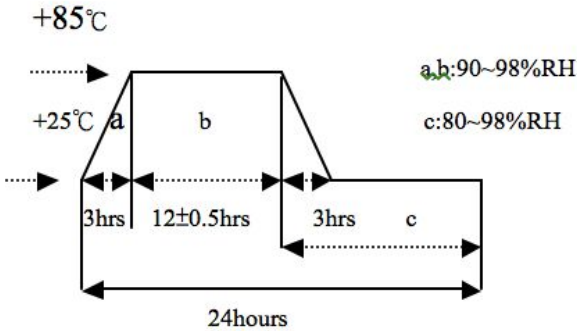Temp./Humidity Cycle	The part shall be subjected to 10 cycles. One cycle shall be 24 hours and consist of: 	
----------------------	--	--

Reliability Test

Item	Test condition	Evaluation standard
Operating Life Test	Ordinary Temperature The part shall be subjected to 96 hours of continuous operation at +25°C±10°C.	After the test, the part shall meet specifications without any degradation in appearance and performance except SPL. After 4 hours at +25°C, the SPL should be in±10dBA compared with initial one.
	High Temperature The part shall be subjected to 72 hours of continuous operation at +75°C at 3.6V, 2730Hz applied.	
	Low Temperature The part shall be subjected to 72 hours of continuous operation at -30°C at 3.6V, 2730Hz applied.	

Standard Test Condition:

- a) Temperature: +5~+35°C
- b) Humidity: 45~85%
- c) Pressure: 86~106KPa




soberton inc.

ST BUZZER

Acoustic Product Specification

Product Number: ST-A03BH

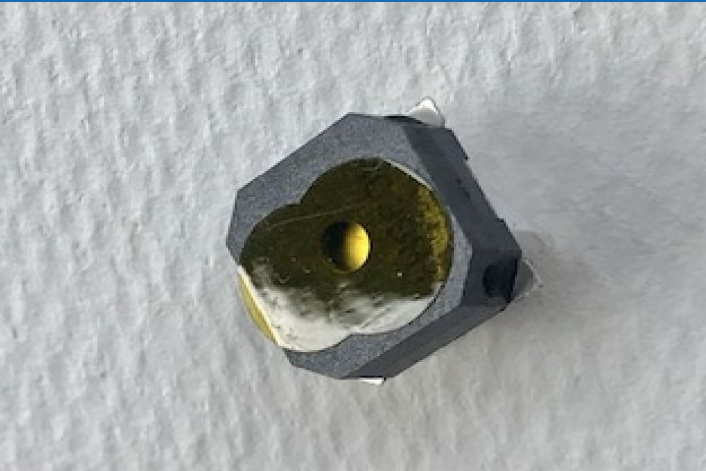

Release | Revision: B/2019

CONTENTS

This document contains the technical specifications for the electromagnetic buzzer.

Page 1
Specifications

Mechanical Characteristics

Page 2
Environment Test

Reliability Test

Page 3
Recommended Temperature
Profile

Measurement Test Circuit

Measurement Method


Page 4
Frequency Response Curve

Page 5
Dimensions


Page 6
Packing

Recommended Temperature Profile for Reflow Oven

Recommendable wave soldering condition is as follows:
Note 1: It is requested that reflow soldering should be executed after heat of product goes down to normal temperature.
Note 2: Peak reflow temperature of 250°C maximum of 10 seconds, with a maximum duration of 40-60 seconds between 220°C and 250°C

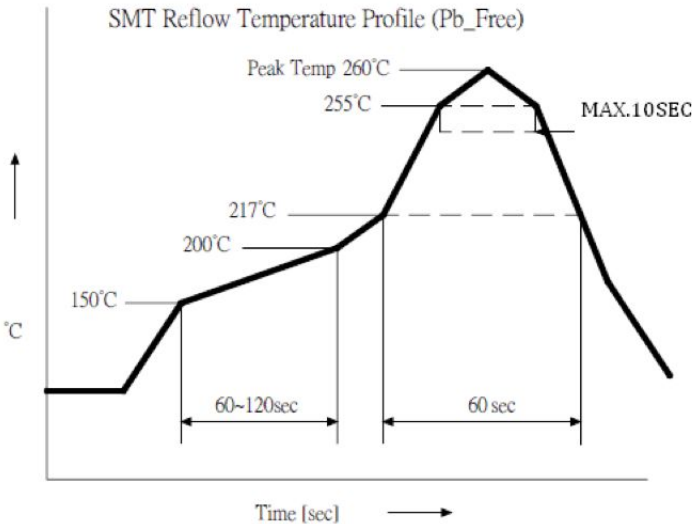


Measurement Test Circuit

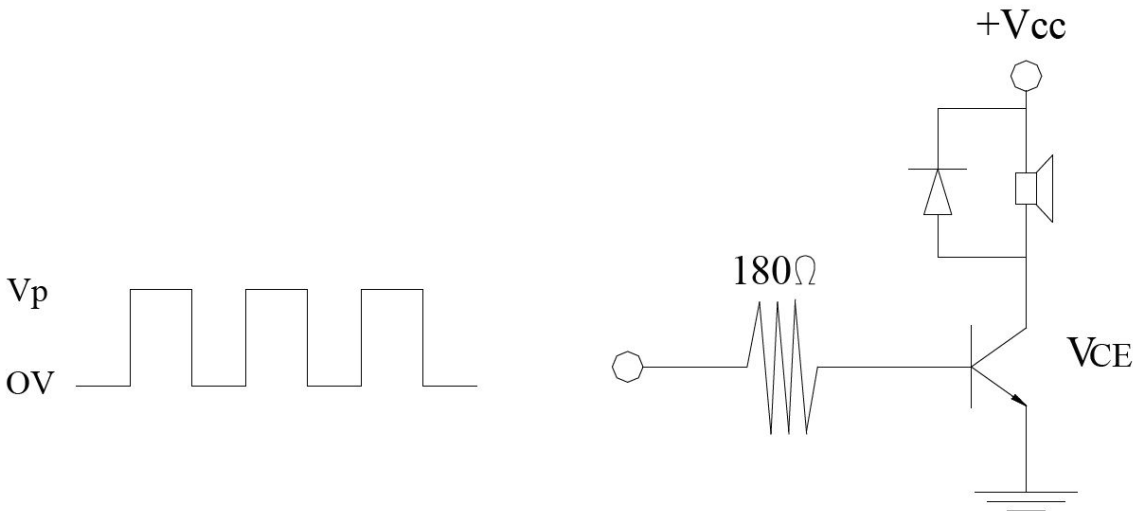

Measurement Method

S.P.L Measuring Circuit
Input Signal: 3.6 Vo-p, square wave, ½ duty, 2730Hz

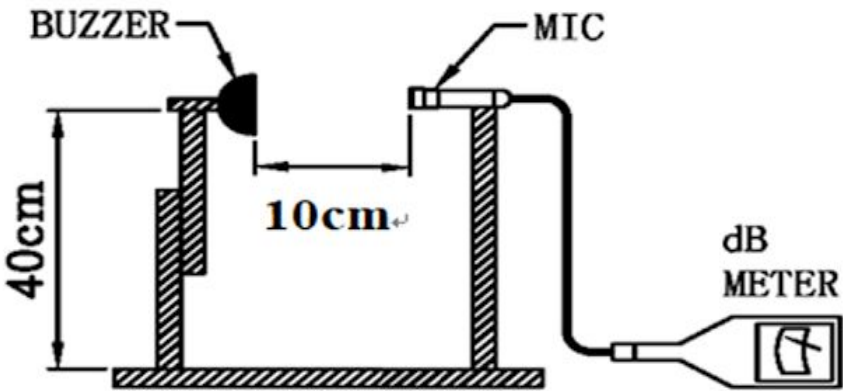

Mic: RION S.P.L meter UC30 or equivalent
S.G: Hewlett Packard 33120A Function Generator or equivalent




soberton inc.

ST BUZZER

Acoustic Product Specification

Product Number: ST-A03BH

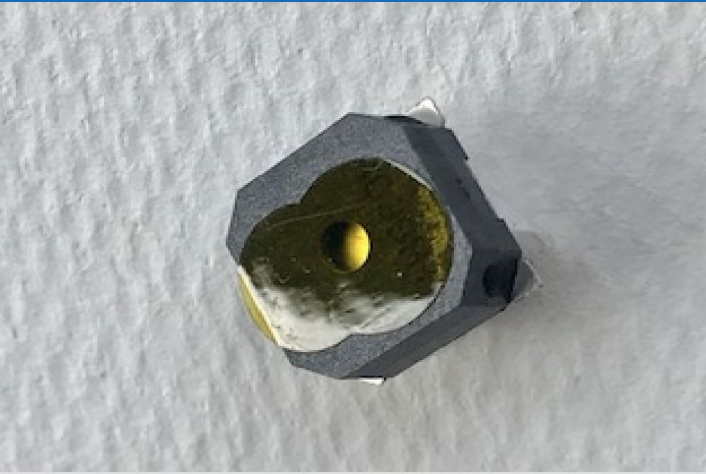

Release | Revision: B/2019

CONTENTS

This document contains the technical specifications for the electromagnetic buzzer.

Page 1

Specifications

Mechanical Characteristics

Page 2

Environment Test

Reliability Test

Page 3

Recommended Temperature Profile

Measurement Test Circuit

Measurement Method

Page 4

Frequency Response Curve


Page 5

Dimensions

Page 6

Packing

Frequency Response Curve

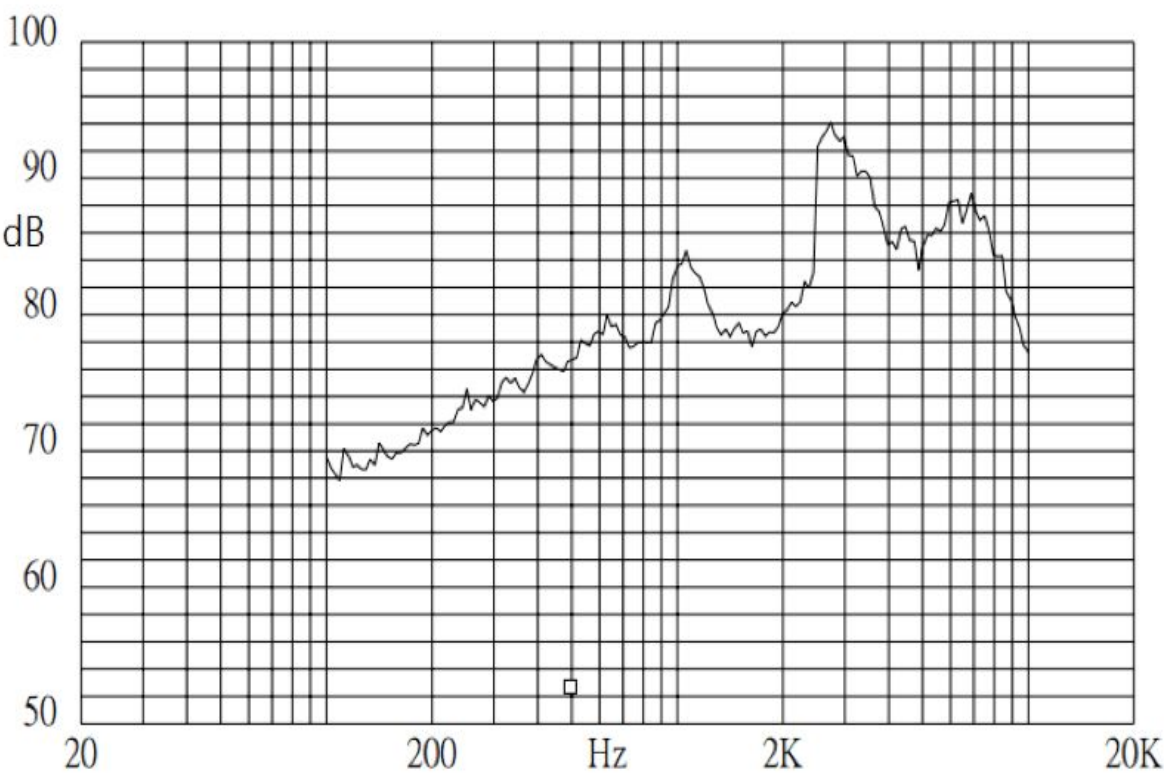




soberton inc.

ST BUZZER

Acoustic Product Specification

Product Number: ST-A03BH

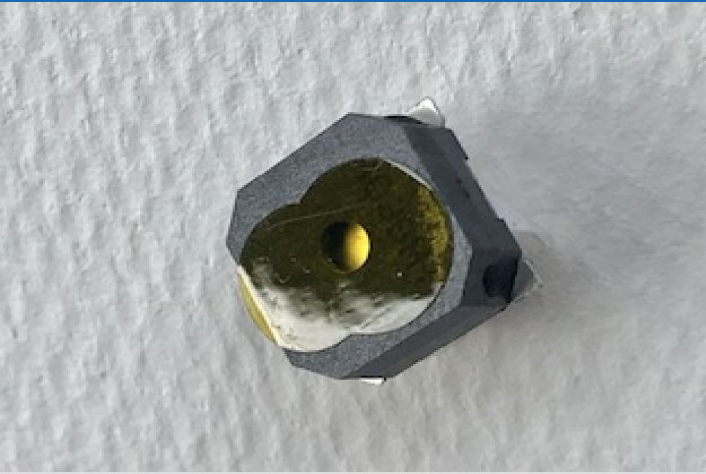

Release | Revision: B/2019

CONTENTS

This document contains the technical specifications for the electromagnetic buzzer.

Page 1
Specifications

Mechanical Characteristics

Page 2
Environment Test

Reliability Test

Page 3
Recommended Temperature Profile

Measurement Test Circuit

Measurement Method




Page 4
Frequency Response Curve

Page 5
Dimensions

Page 6
Packing

Dimensions

Tolerance: ±0.5 (unit: mm)

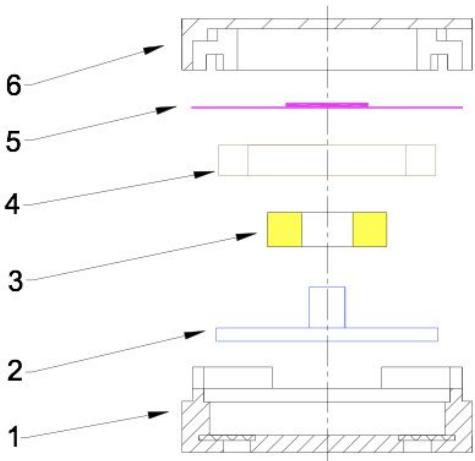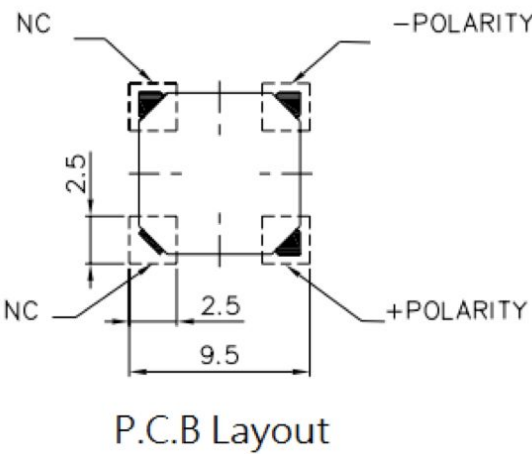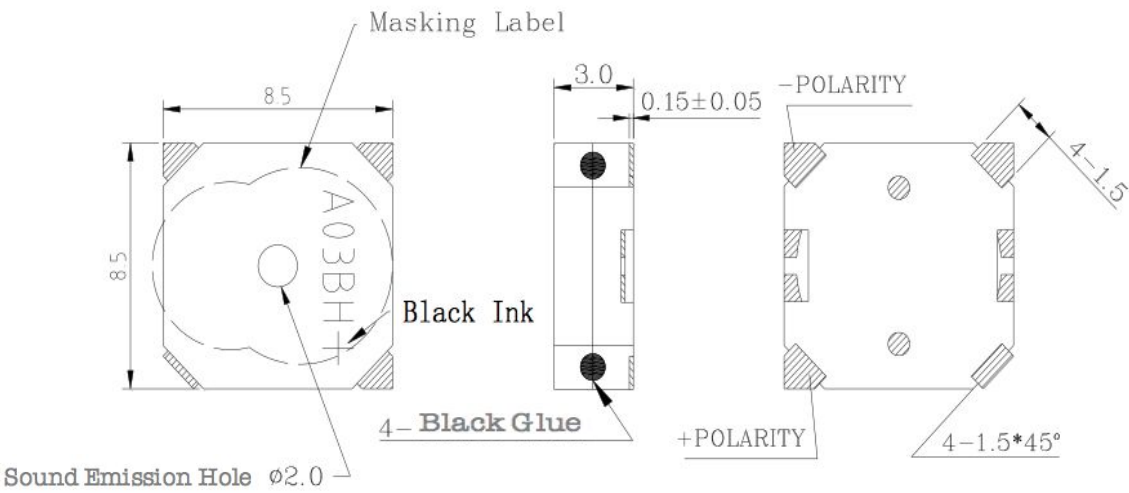

No.	Part Name	Material	Quantity
1	Case	LCP	1
2	Core	Ferrum	1
3	Coil	Copper	1
4	Magnet Ring	NdFeB	1
5	Diaphragm	Ferrum	1
6	Case	LCP	1




soberton inc.

ST BUZZER

Acoustic Product Specification

Product Number: ST-A03BH

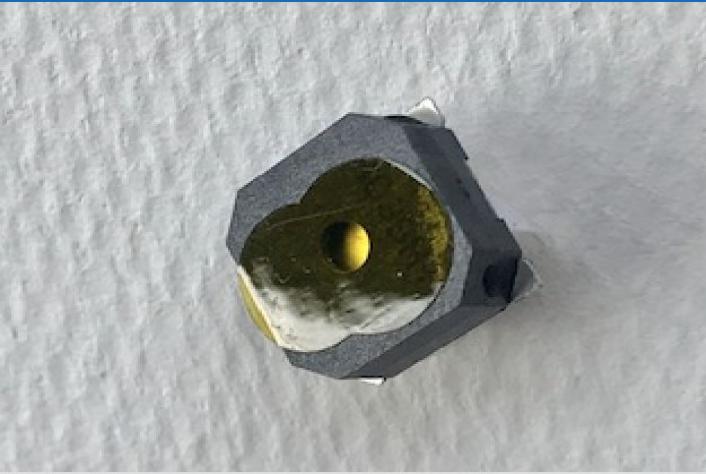

Release | Revision: B/2019

CONTENTS

This document contains the technical specifications for the electromagnetic buzzer.

Page 1
Specifications

Mechanical Characteristics

Page 2
Environment Test

Reliability Test

Page 3
Recommended Temperature
Profile

Measurement Test Circuit


Measurement Method

Page 4
Frequency Response Curve


Page 5
Dimensions

Page 6
Packing

Packing

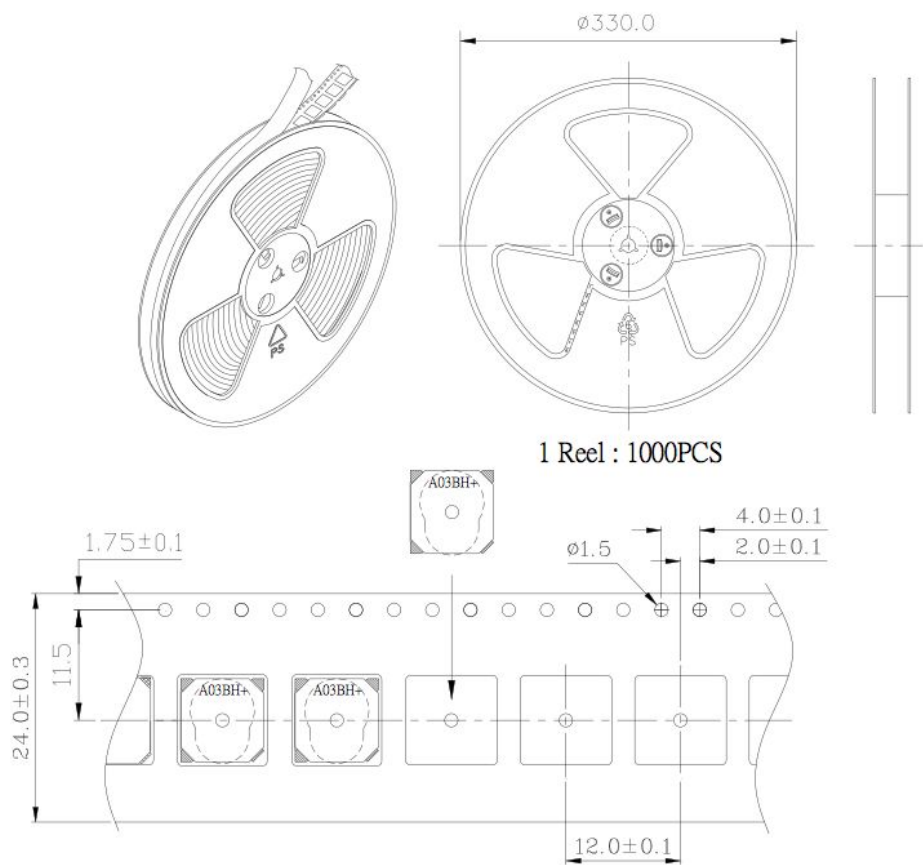

1 Reel : 1000PCS

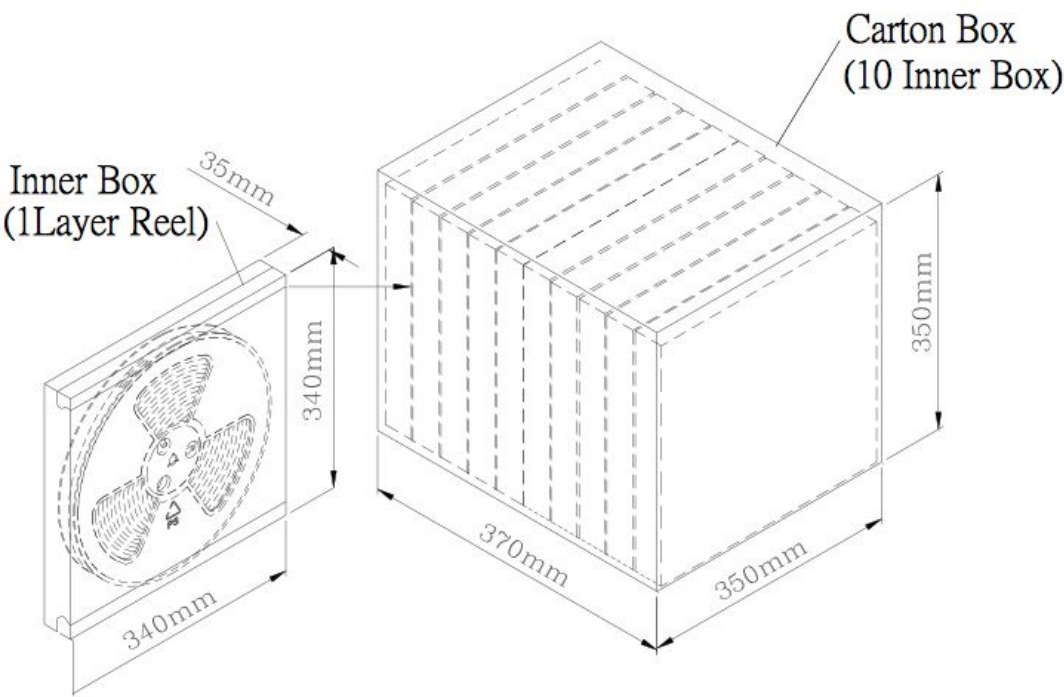

Packing Detail	L x W x H (mm)	Pieces(pcs)
Inner Box	340 x 340 x 35	1 x 1,000= 1,000
Per Carton	370 x 350 x 350	10 x 1,000 = 10,000